

90 - 30-039-07723
444 - 30-039-24296

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 36 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #90, #444

cps 237w

Elevation 6567' Completion Date 8/25/70 Total Depth 450' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 180'

Depths gas encountered: N/A

Type & amount of coke breeze used: 70 BAGS

Depths anodes placed: 415', 405', 395', 385', 375', 365', 330', 320', 310', 300'


Depths vent pipes placed: N/A

Vent pipe perforations: 335'

Remarks: qb #2 - ALL ANODES TANDEM.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

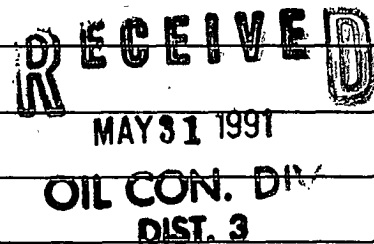

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

GROUND BED No. 2

Contract By C.D.S.

[Signature]

Completion Date 8-25-70

Drilling Log (Attach Hereto) ☐

Well Name S.J. 30-6 # 90		Location SW 36-30-6		CPS No. 237 W	
Type & Size Bit Used 6 3/4				Work Order No. 184-70150-50-20	
Anode Hole Depth 450	Total Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth	# 1	# 2	# 3	# 4	# 5
	415	405	395	385	375
Anode Output (Amps)	# 1	# 2	# 3	# 4	# 5
	3.7	3.7	3.0	3.0	4.2
Anode Depth	# 6	# 7	# 8	# 9	# 10
	365	330	320	310	300
Anode Output (Amps)	# 6	# 7	# 8	# 9	# 10
	4.2	3.8	3.8	4.1	4.1
Anode Depth	# 11	# 12	# 13	# 14	# 15
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15
Total Circuit Resistance	No. 8 C.P. Cable Used		No. 2 C.P. Cable Used		
Volts 11.2	Amps 10.6	Ohms 1.11			

Remarks: Drill with air to 130. Driller said lots of water -
Vent Hose Perforated 235'
All Anodes Tandem -
Pump 70 Bags Coke Slurry 24

All Construction Completed

[Signature]
(Signature)

GROUND BED LAYOUT SKETCH

