

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas ☒ well ☐ other

2. NAME OF OPERATOR
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR
Boz 289, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 910'N, 1090'W
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

5. LEASE
SF 078499

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Russell

9. WELL NO.
3A

10. FIELD OR WILDCAT NAME
Blanco Mesa Verde

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 23, T-28-N, R-8-W
NMPM

12. COUNTY OR PARISH
San Juan

13. STATE
New Mexico

14. API NO.


15. ELEVATIONS (SHOW DF, KDB, AND WD)
6372' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

4-23-80: PBDT 6007'. Tested casing to 3500#, OK. Perfed Upper & Lower P.L. 5109, 5114, 5119, 5124, 5130, 5135, 5140, 5154, 5156, 5165, 5168, 5211, 5219, 5278, 5305, 5314, 5369, 5376, 5400, 5429, 5434, 5454, 5459, 5502' W/1 SPZ. Fraced w/76,500# 20/40 sand, 153,000 gal. wtr.. Flushed w/7000 gal. wtr.

Perfed C.H. & Men. 4511, 4559, 4566, 4578, 4582, 4590, 4594, 4604, 4608, 4777, 4784, 4803, 4810, 4846, 4852, 4884, 5004, 5024' W/1 SPZ. Fraced w/47,000# 20/40 sand, 105,000 gal. wtr. Flushed w/6640 gal. wtr.

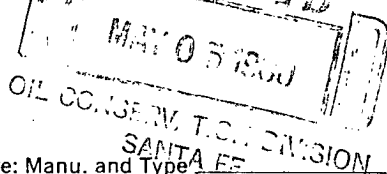

Subsurface Safety Valve: Manu. and Type



18. I hereby certify that the foregoing is true and correct

SIGNED

M. B. Busco

TITLE

Drilling Clerk

DATE

April 29, 1980

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

ACCEPTED FOR RECORD

NMOCC

APR 30 1980

[Signature]