

6 - 30-045-09555
10 - 30-045-09547

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit A Sec. 18 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced SCHUMACHER #6, #10

cps 208w

Elevation 6320' Completion Date 5/20/63 Total Depth 180' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1275 lbs.

Depths anodes placed: 156', 150', 144', 138', 132', 126', 120', 114'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1 ANODES #1-#4 MADE UP WITH 81b. SOLID DIRECT BURIAL CABLE.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 5-20-63

WELL NAME SCHUMACHER #10 CPS NO. 208W

LOCATION 18-30N-10W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 180'

TOTAL DRILLING RIG TIME 5hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 1

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 156', #2 150', #3 144', #4 138' 5 132' 6 126' 7 120' 8 114'

TOTAL LBS. COKE USED 1275 lbs

ANODE OUTPUTS 12 VOLTS, #1 1.8, #2 2.4, #3 2.9, #4 3.25 5 3.8 6 3.3

TOTAL CIRCUIT RESISTANCE: VOLTS 11.5 AMPERES 7.5 OHMS 1.54

NUMBER FEET SURFACE CABLE CONDUIT 469'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static V/s = .82 R 600' N


Installed Good-Air Rect 28V 12A

Note Anodes 1, 2, 3 & 4 made up with #8 Solid Direct
Burial cable

ALL CONSTRUCTION COMPLETED

E. Paulk
SIGNATURE

GROUND BED LAYOUT SKETCH

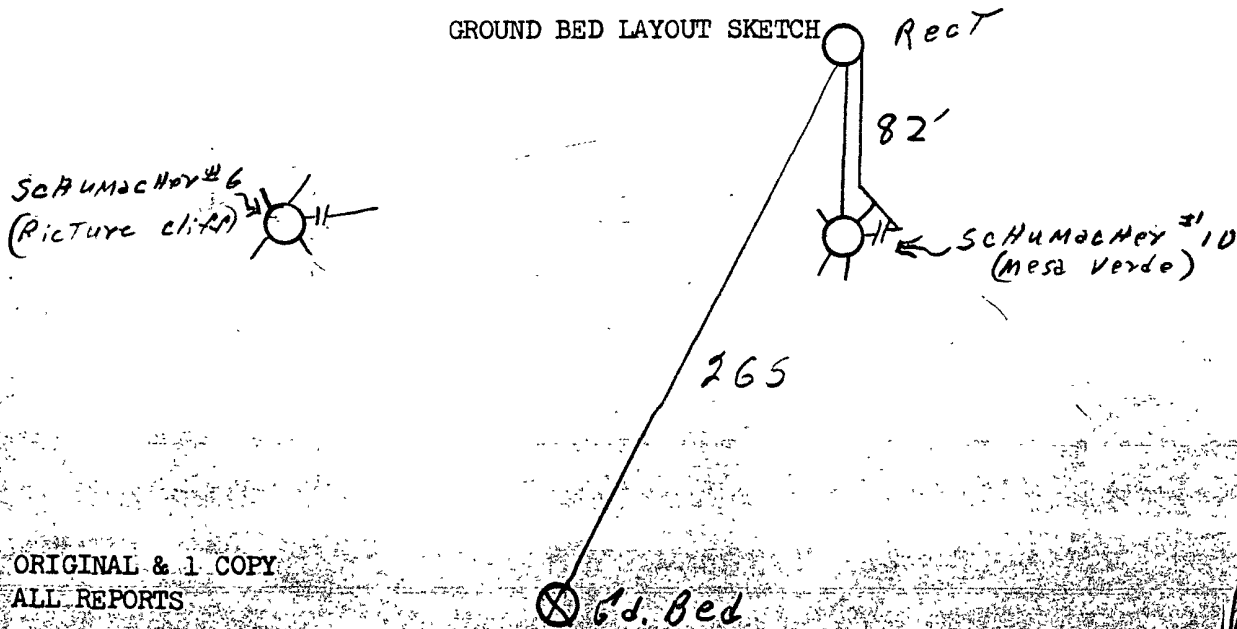

ORIGINAL & 1 COPY
ALL REPORTS

DAILY DRILLING REPORT

LEASE **Schnepper** WELL NO. **910** CONTRACTOR **LE. Wilson** RIG NO. **D-2** REPORT NO. DATE **5-20-12**

Driller										Total Men In Crew										Driller										Total Men In Crew									
FROM		TO		FORMATION		WT. BIT		R.P.M.		FROM		TO		FORMATION		WT. BIT		R.P.M.		FROM		TO		FORMATION		WT. BIT		R.P.M.											
0		3:5		S. 45c.		2791X				155		180		S. 5h.																									
25		84		S. 5h.																																			
34		109		S. 5h.																																			
109		105		S.C.		1'																																	
BIT NO.				NO. DC		SIZE		LENG.		BIT NO.				NO. DC		SIZE		LENG.		BIT NO.				NO. DC		SIZE		LENG.											
SERIAL NO.		2791X		NO. DC		SIZE		LENG.		SERIAL NO.				NO. DC		SIZE		LENG.		SERIAL NO.				NO. DC		SIZE		LENG.											
SIZE		1 1/4		STANDS						SIZE				STANDS						SIZE				STANDS															
TYPE		Rock		SINGLES						TYPE				SINGLES						TYPE				SINGLES															
MAKE		V.A.		DOWN ON KELLY						MAKE				DOWN ON KELLY						MAKE				DOWN ON KELLY															
MUD RECORD				TOTAL DEPTH		180'				MUD RECORD				TOTAL DEPTH						MUD RECORD				TOTAL DEPTH															
Time		WT.		VIS.		MUD, ADDITIVES USED AND RECEIVED				Time		WT.		VIS.		MUD, ADDITIVES USED AND RECEIVED				Time		WT.		VIS.		MUD, ADDITIVES USED AND RECEIVED													