

1523

E

30-045-25473

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit K Sec. 34 Twp 29 Rng 10

Name of Well/Wells or Pipeline Serviced ZACHERY #32
cps 6350w

Elevation N/A Completion Date 8/8/83 Total Depth 340' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 60'

Depths gas encountered: N/A

Type & amount of coke breeze used: 2000 lbs.

Depths anodes placed: 315', 305', 295', 285', 275', 265', 255', 245', 170' 160'

Depths vent pipes placed: 315'

Vent pipe perforations: N/A

Remarks: (gb #1)

RECEIVED
MAY 8 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

10-01-15

CORROSION CONTROL CO.

P. O. BOX 179 — PHONE 334-6361
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☐

6350W


Completion Date 5/18/83

Well Name ZACHERY 32				Location U.T.P.C.				K 34-29-10			
Type & Size Bit Used								Work Order No.			
Anode Hole Depth 340		Total Drilling Rig Time		Total Lbs. Coke Used 2000#		Lost Circulation Mat'l Used		No. Sacks Mud Used			
Anode Depth		Anode Output (Amps)		Anode Depth		Anode Output (Amps)		Total Circuit Resistance		No. 8 C.P. Cable Used	
#1 315	#2 305	#3 295	#4 285	#5 275	#6 265	#7 255	#8 245	#9 170	#10 160		
#1 2.7	#2 2.3	#3 3.8	#4 5.3	#5 5.5	#6 5.1	#7 5.3	#8 4.0	#9 5.4	#10 5.2		
#11	#12	#13	#14	#15	#16	#17	#18	#19	#20		
#11	#12	#13	#14	#15	#16	#17	#18	#19	#20		
Volts 12.1				Amps 22.3		Ohms 54		No. 2 C.P. Cable Used			

Remarks: **WATER WAS AT 60' USED 315' VENT PIPE**

All Construction Completed
Jim C.
(Signature)

GROUND BED LAYOUT SKETCH

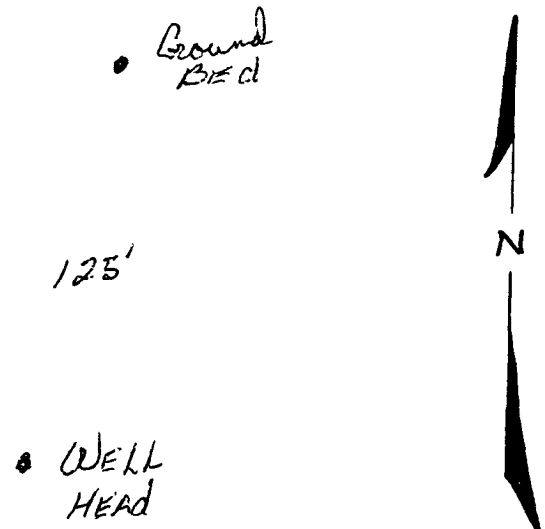

CORROSION CONTROL CO. • 300 West Chaco • Aztec, New Mexico

LOCATION Union of Texas DAILY DRILLING REPORT Aug 8, 19 83FARM: Zachary 32 WELL NUMBER: 15 SECTION: 34 TOWNSHIP: 29 RANGE: 10HOLE MADE: Between 60-80 340

DESCRIPTION OF FORMATION

FROM	TO	FORMATION IS	COLOR
0	80	sand + water sand	
80	110	shale	
110	150	sand	
150	190	sandy shale	

REMARKS: Water between 60-80 also 130-150.
Not producing much.

Driller

Tool Dresser

HOLE MADE:

DESCRIPTION OF FORMATION

FROM	TO	FORMATION IS	COLOR
190	220	sand + sandy shale streamers	
220	240	Bentonite	
240	340	sandy shale	

REMARKS: Sandy shale drills easy, foam cuttings
show more sand than shale.Driller Debbie Bobby Tool Dresser Larence Targent

HOLE MADE:

DESCRIPTION OF FORMATION

FROM	TO	FORMATION IS	COLOR

REMARKS:

Driller

Tool Dresser