

1179

#1A 30-045-26250

E

#2E 30-045-26417

#7 30-045-21447

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit I Sec. 12 Twp 29 Rng. 10Name of Well/Wells or Pipeline Serviced HOUCK #2E, LACKEY A #7, #1A

cps 1866w

Elevation 5871' Completion Date 9/27/87 Total Depth 450' Land Type* N/ACasing, Sizes, Types & Depths 35' OF 7" CASINGIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 250' NO SAMPLEDepths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 410', 400', 390', 380', 370', 360', 350', 340', 330', 315'Depths vent pipes placed: 439'Vent pipe perforations: 240'Remarks: (gb #1)**RECEIVED**

MAY 31 1991

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MEDIAN OIL INC.
Farmington Region
Post Office Box 4239
Farmington, New Mexico 87499
(505) 327-0251

Corrected
Copy. 10/2/87

Drilling Log (Attach Here)



WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT Completion Date 9/27/87
DAILY LOG

CPS #	Well Name, Line or Plant:	Work Order #	Status:	Ins. Union Check											
1866	LACKY A-1A 5403A	I 12-29-10	278	☒ Good ☐ Bad											
	HOUCK 2-E 54153A	O 12-29-10	277												
	LACKY A 7 43864A	P 12-29-10													
Location	Anode Size:	Anode Type:	Size Bit:												
I-12-29-10	2" X 60"	DURIRON	6"												
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used											
450'	434'	3:04:45													
Anode Depth	#1	#2	#3	#4	#5	#6	#7	#8	#9	#10					
410	400	390	380	370	360	350	340	330	315						
Anode Output (Amps)	#1	#2	#3	#4	#5	#6	#7	#8	#9	#10					
4.1	5.1	4.8	4.4	4.1	6.1	5.0	4.9	4.8	5.8						
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20					
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20					
Total Circuit Resistance	Volts					Amps					Ohms				
	11.68					20.5					.569				
No. 8 C.P. Cable Used					No. 2 C.P. Cable Used										

Remarks: Driller said H2O was at 250' ran 439' of 1" PVC Bottom 240' perforated. ran 35' of 7" casing took 1 1/2 hr. lost #1 anode no water sample.

1022294


555-0082-702-00-1

Rectifier Size: 60 V 28 A 4300 4036.00
Addn'l Depth: - 264
Depth Credit: 66' 15.00
Extra Cable: 60' 605.38
Ditch & 1 Cable: 1552 80.08
Ditch & 2 Cable: 154
25' Meter Pole: 295.00
20' Meter Pole: 295.00
10' Stub Pole: 40.00
Junction Box: 40.00

All Construction Completed

M. D. 7114 La. d.
(Signature)

GROUND BED LAYOUT SKETCH

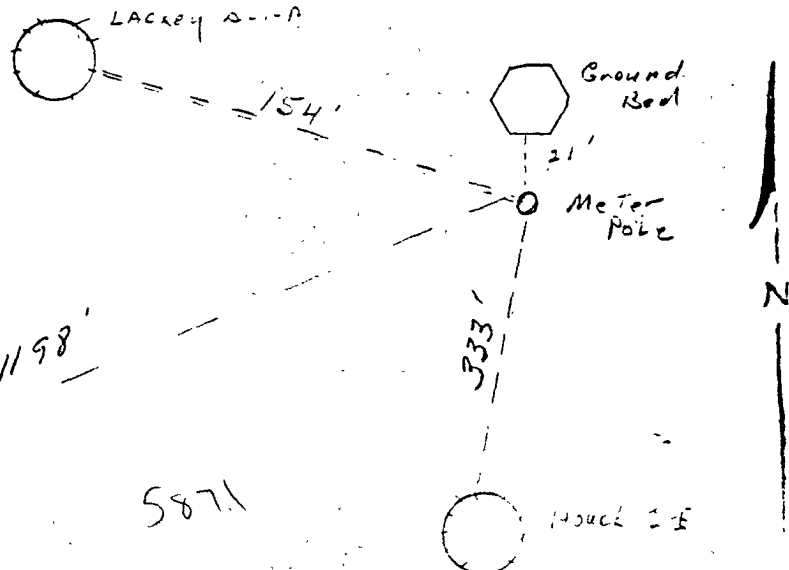

CASING AT 390' = 9R.
Furnished MDI

35' X 20' P/FOOT

MDI - CASING COST
390 X 35 = 136.50

LACKY A-1A

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

CPS 186cc

WELL NAME: LACKEY A-1-A	WELL NUMBER:	SECTION:	TOWNSHIP:	RANGE:
----------------------------	--------------	----------	-----------	--------

WATER AT:

FEET:

HOLE MADE:

[illegible]

REMARKS:

Brad Howe

Driller $\frac{E_0}{v_0}$

Tool Dresser Y.L. 2000

$$\Omega = 569$$

AZTEC, NEW MEXICO 87410

Date 9/27/87

Well No. A-1-A Location I-12-29-10 Volts Applied 11.68 Amperes 20.5

[illegible]