

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: I 20 32 11 LEASE NUMBER: NM-03189

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #012 PC
DUALWELL N/A

30-045 21488

ELEVATION: 6693' GR COMPLETION DATE: 03/22/77 TOTAL DEPTH: 340 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG--Top:N/A' Bottom: N/A' Used 0 sk. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 85 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '

COKE: 7560 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 110 ft. BOTTOM ANODE @ 325 ft.

VENT PIPE: 1" PVC Set @ 340 ft. Vent pipe perforated from 90 ft. to 340 ft.

REMARKS: _____

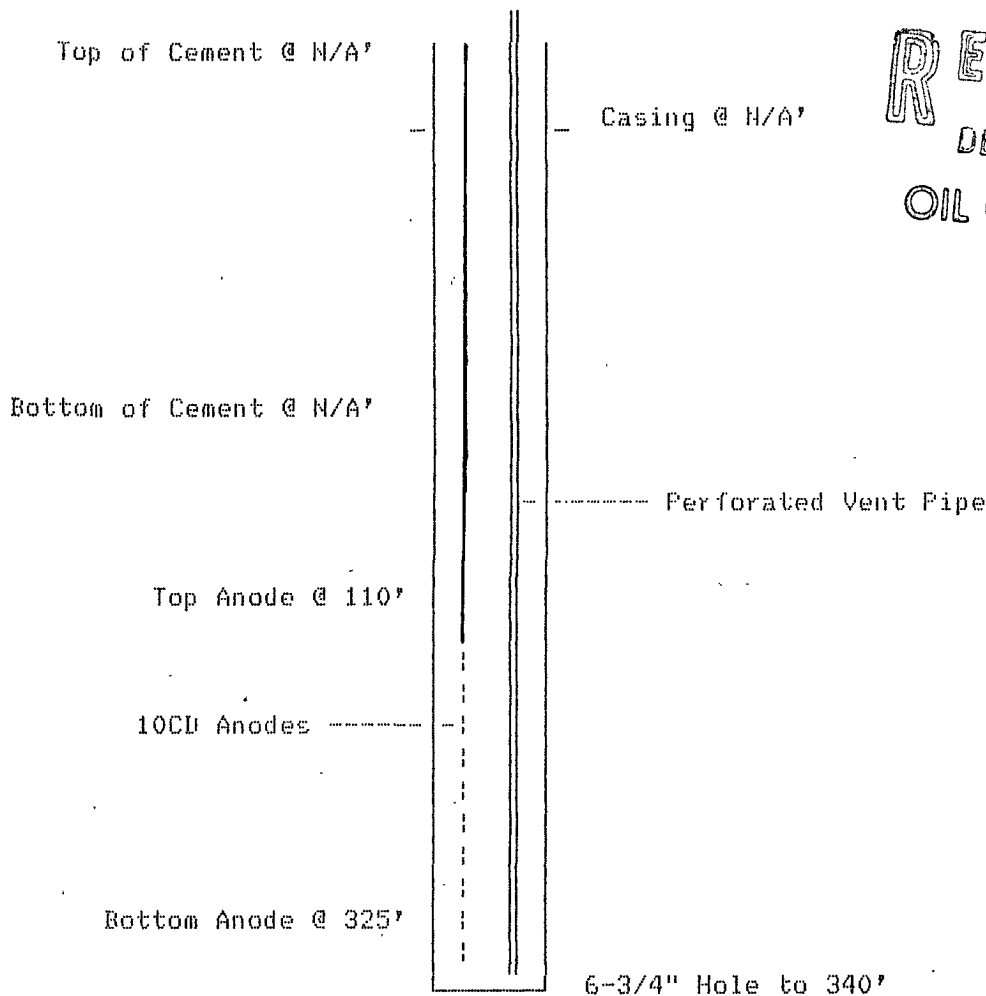

RECEIVED
DEC 11 1991
OIL CON. DIV.
DIST. 3

JOB NO. 6.0102-1

DATE: _____

SURVEY: COX Canyon # 12 Sect. 20, T32N, R11

BY: JH

TEST LOCATION						
70.90	Shale	50		200	-4	
70.100	Sand					
100.100	Shale	75		225		
100.100	Sand					
100.100	Shale					
21.120.15	Sand	Blind as 29.5 TOG		280		
305/335	Shale		-10			
335/360	Sand	Caving "Bed"	-120	-9		
			125		275	
			-130	-8		
110	10					
		150		300		
120	9				-3	
130	8				-2	
			-170	-7		
170	7	175			-1	
180	6		-180	-6		
190	5		-190	-5		
200	4	195				
305	3					
315	2			70	325	
325	1					

NOTES:

Temp 85