

#8A 30-045-24075

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

Operator Meridian Oil Inc. Location: Unit 0 Sec. 9 Twp 31 Rng 12

Name of Well/Wells or Pipeline Serviced _____

Newberry #8A

Elevation 6192 Completion Date 4-1-93 Total Depth 448 Land Type F

Casing Strings, Sizes, Types & Depths 3/15 Set 98' of 8" PVC Casing.

NO GAS, WATER, or Boulders were Encountered During Casing

If Casing Strings are cemented, show amounts & types used Cemented

WITH 19 SACKS.

If Cement or Bentonite Plugs have been placed, show depths & amounts used

No plugs

Depths & thickness of water zones with description of water: Fresh, Clear,

Salty, Sulphur, Etc. 200' and was clear

Depths gas encountered: No gas

Ground bed depth with type & amount of coke breeze used: 448' with

53 (100lb) sacks of Loresco SW.

Depths anodes placed: 415' at 430, 415' at 245 Mags = 140, 135, 125, 120.

Depths vent pipes placed: Bottom to Surface

Vent pipe perforations: up to 200'.

Remarks: _____

RECEIVED

JAN 31 1994

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

API WATER ANALYSIS REPORT FORM

Laboratory No. 25-930417-3A

Company MERIDIAN OIL		Sample No.		Date Sampled 4-1-93	
Field 2352W		Legal Description 09-31-12		County or Parish S.T.	
Lease or Unit		Well Nauberry # 8A		Depth	
				Formation M.V.	
Type of Water (Produced, Supply, etc.)		Sampling Point G. Bed		Water, B/D	
				Sampled By R. Smith	

DISSOLVED SOLIDS

CATIONS

	mg/l	me/l
Sodium, Na (calc.)	2700	120
Calcium, Ca	253	12.6
Magnesium, Mg	6	0.5
Barium, Ba		

ANIONS

Chloride, Cl	972	27.4
Sulfate, SO_4	4300	100
Carbonate, CO_3	-	-
Bicarbonate, HCO_3	170	2.8

OTHER PROPERTIES

pH	7.60
Specific Gravity, 60/60 F.	1.0107
Resistivity (ohm-meters) 74 F.	1.05

Total Dissolved Solids (calc.)


2900

Iron, Fe (total)

Sulfide, as H_2S

REMARKS & RECOMMENDATIONS:

ATTN: B. DONAHUE

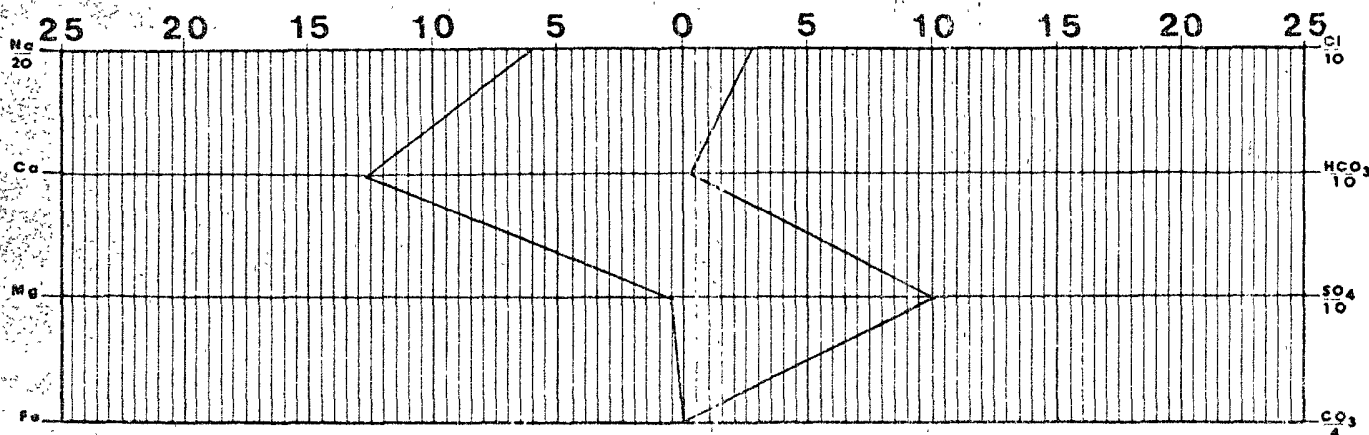

Date Received April 17th 1993	Preserved	Date Analyzed May 21st 1993	Analyzed By R. H.
---	-----------	---------------------------------------	-----------------------------



TECH, Inc.
333 East Main
Farmington
New Mexico
87401
505/327-3311