

30-045-22389

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NW Sec. 29 Twp 31 Rng 10Name of Well/Wells or Pipeline Serviced ATLANTIC A #8A

cps 1199w

Elevation 6057 Completion Date 6/26/78 Total Depth 340' Land Type* N/ACasing, Sizes, Types & Depths 24' OF 8" PIPEIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 80' & 100'Depths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 290', 280', 270', 235', 225', 215', 205', 185', 175', 165'Depths vent pipes placed: N/AVent pipe perforations: N/ARemarks: gb #1**RECEIVED**
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto). ☐

Completion Date 6-26-78

Well Name ATLANTIC A #8A		Location NW 29-31-10		CPS No. 1199 W	
Type & Size Bit Used 6 3/4"				Work Order No. 57216-21	
Anode Hole Depth 340 - 335 TD	Total Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 290	# 2 280	# 3 270	# 4 235	# 5 225	# 6 215
# 7 205	# 8 185	# 9 175	# 10 165		
Anode Output (Amps)					
# 1 4.8	# 2 5.0	# 3 4.6	# 4 4.8	# 5 5.5	# 6 4.6
# 7 4.8	# 8 5.2	# 9 5.6	# 10 5.2		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance					
Volts 8.2	Amps 13.0	Ohms .63			
No. 8 C.P. Cable Used			No. 2 C.P. Cable Used		

Remarks: **STATIC = .86 CABLE TOOLS 28'-2" HOLE SET 24'6" 8" PIPE (33 1/2 HRS) DRILLED TO 340' LOGGED TO 335' DAMP AT 88' GOOD WATER 100' - 110' ESTIMATE 3-4 GAL PER MIN. HOLE FULL NEXT AM. FILLED W/ WATER TO LOG TO LOG.**

DITCH 1 WIRE = 227'

EXTRA WIRE = 110'

40/16 & 20' METER POLE


HOLE = -165'

All Construction Completed

BT

(Signature)

GROUND BED LAYOUT SKETCH

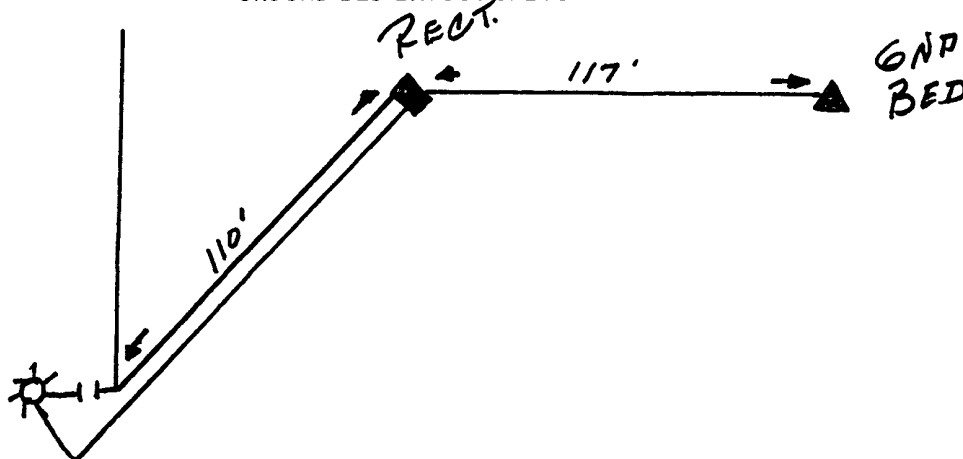

DISTRIBUTION:

WHITE - Division Corrosion Office

YELLOW - Area Corrosion Office

PINK - Originator File

6057

57216-21

1199 W
ATLANTIC A #8A

STATIC = .86
NW 29-31-10

DRILLED TO 340' LOGGED TO 335'
DAMP AT 80' GOOD WATER AT 100' TO 110' HOLE FILL
NEXT A.M. FILLED W/ WATER TO 100'
HOLE = -165'

MW	gals/mol
16.04	C1 6.4
30.07	C2 10.12
44.10	C3 10.42
58.12	iC4 12.38
58.12	nC4 11.93
72.15	iC5 13.85
72.15	nC5 13.71
86.18	iC6 15.50
86.18	C6 15.57
100.21	iC7 17.2
100.21	C7 17.46
114.23	C8 19.39
28.05	C2 9.64
42.08	C3 9.67

MW	MISC	gals/mol
32.00	O2	3.37
28.01	CO	4.19
44.01	CO2	6.38
64.06	SO2	5.50
34.08	H2S	5.17
28.01	N2	4.16
2.02	H2	3.38

100-2.6	60-2.5
2.4	3.0
10-2.4	70-3.0 (8)
2.9	3.2
20-2.6	80-3.1 (2)
2.7	3.0
30-2.4	90-3.1 (1)
1.8	3.2
40-1.6	300-2.6
1.8	1.2
50-2.2	10-1.2
2.8	1.4
60-3.0	20-.8
3.3 (10)	.6
70-3.3 (9)	30-.8
3.6 (8)	1.4
80-3.6 (7)	40-
3.5 (6)	50-
90-3.2 (5)	60-
2.8	70-
200-2.7	80-
3.0 (4)	90-
10-3.3 (3)	400-
3.0 (2)	
20-3.1 (1)	
3.3 (5)	
30-3.5 (4)	
3.1 (3)	
40-3.2 (2)	
2.8	
50-2.1	
2.6	

$$8.2 \sqrt{13.0A} = .63 \Omega$$

- 1 = 290-4.2-4.8
- 2 = 280-4.0-5.0
- 3 = 270-3.8-4.6
- 4 = 235-3.8-4.8
- 5 = 225-4.2-5.5
- 6 = 215-3.6-4.6
- 7 = 205-3.8-4.8
- 8 = 185-4.0-5.2
- 9 = 175-4.6-5.6
- 10 = 165-4.4-5.2

SIGNED: Toolpusher

____ Company Supervisor.

SAN JUAN DIVISION LABORATORY

ANALYSIS NO. 1-9230

DATE COMPLETED 7-6-78

WELL NAME	LOCATION S T R	DATE SECURED	GAL./ DAY	PPM T.D.S.	pH	PPM CHLORIDES	PPM SULFATE
Jones A #1A MV	10-28-8	6-20	24	7452	7.0	4320	7840
Jones A #1A PC	10-28-8	6-20	1	39	6.8	13	1000
Lughes #4A	20-29-8	6-20	54	6858	7.2	4830	1280
Day A #5A	18-29-8	6-20	38	7632	7.1	6320	2500
Day #1A	17-29-8	6-20	80	6670	7.4	6390	500
Day A #1A	17-29-8	6-20	106	7527	7.4	7170	1000
Day #3A	18-29-8	6-20	42	6913	6.7	7170	1000
Day A #2A	7-29-8	6-20	96	5887	7.6	6320	64
El Paso #1A	20-29-9	6-17	8	9493	6.8	6745	7080
Ansfield #2A 1241W	19-30-9	6-19		1019	7.3	24	1520
Wigley #1A 1275W	6-30-9	6-19		430	7.1	20	600
Lorance #2A 1220W	21-30-9	6-19		1373	7.3	16	2520
San Juan #11A 1252W	11-30-10	6-19		636	6.4	24	800
San Ray A #1A 1263W	15-30-10	6-19		210	6.2	8	600
Atlantic D Com #5A 1209W	12-30-10	6-19		1493	6.6	16	3000
Bernaghan #4A 1237W	30-31-8	6-19		432	7.3	12	600
Bernaghan #2A 1235W	28-31-8	6-19		190	7.2	16	680
Bernaghan #1A 1234W	33-31-8	6-19		571	6.9	32	800
Walker 1A 1271W	31-31-9	6-19		1664	7.0	32	3520
Atlantic A #8A 1199W	29-31-10	6-19		2637	7.1	152	5560
Atlantic "C" 4A 1200W	31-31-10	6-19		6720	7.7	504	9800
Cott #4A 1258W	17-31-10	6-19		4506	7.0	186	7760
Brookhaven Com A-1 1212W	16-31-10	6-19		3979	6.7	270	6920