



STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT
OIL CONSERVATION DIVISION
AZTEC DISTRICT OFFICE

TONEY ANAYA
GOVERNOR

1000 RIO BRAZOS ROAD
AZTEC, NEW MEXICO 87410
(505) 334-6178

Division Approved Plugging Program

Bloomfield Oil & Gas Co.
Bergin #9 G-21-29N-11W

Downhole Equipment

10" Surface pipe set to an unknown depth

1. Clean out hole to TD (700')
2. Set a cement plug 700'-500'
3. Pull out of hole & wait on cement 4 hrs.
4. Go back in hole & tag cement. If top of cement is above 550' go to step 5. If not fill to 500'.
5. Pull out of hole to ^{200'}~~100'~~. Set a cement plug ^{200'}~~100'~~ to surface.
6. Erect marker. Fill pits. Clean & level location.


All plugs will be with Class A, B or C cement with or without an accelerator.

BEFORE EXAMINATION OIL CONSERVATION DIVISION
8136
Charles Charles
4-11-84

BLOOMFIELD OIL & GAS CO.
BERGIN #9 G-21-29N-11W

33° 15' SE
FLORA VISTA
1:24,000

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

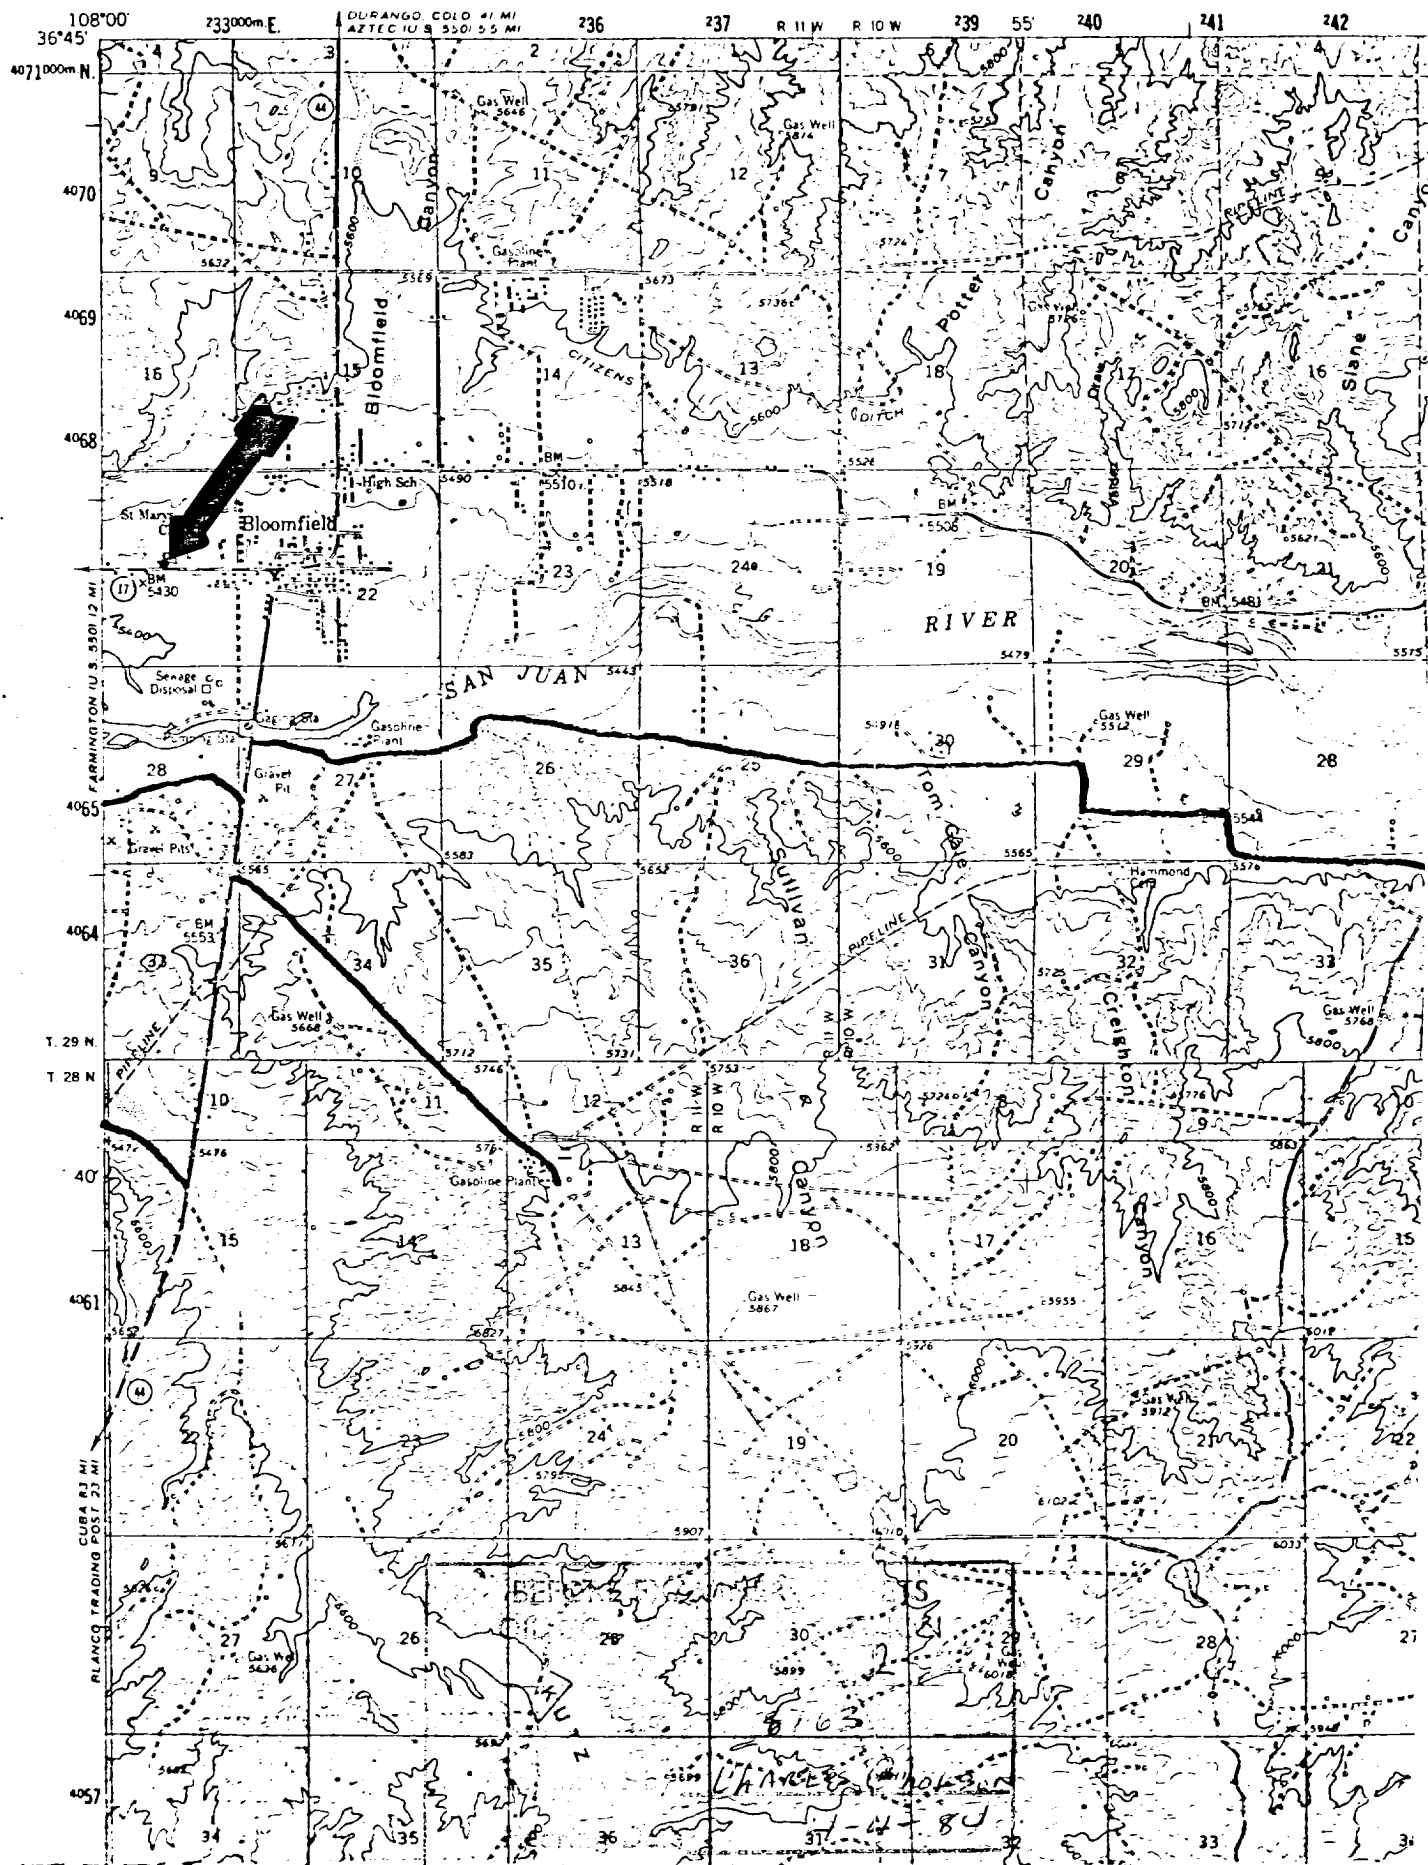

BLOOMFIELD OIL & GAS CO.
BERGIN #9 G-21-29N-11W

STATE NEW MEXICO
COUNTY San Juan SEC. 21 T. 29N R. 11W
FIELD OR AREA Fulcher Basin LOCATION 2430' N, 1920' E
LEASE Bergin WELL NO. 9
COMPANY Bloomfield O&G SPD. _____ COMPLETED 1925
ELEV. 5450' T.D. 700' P.B. _____
CASING _____
SHOT OR ACID _____
PERF. _____
I.P. _____
PRODUCING FORM _____
PRODUCTIVE DEPTH OR INTERVAL _____

REMARKS:

Abandoned.



BEFORE
OIL CO.

3

8136

Charles Cholson