

HOBBS OCD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED
OMB NO 1004-0137
Expires July 31, 2010

AUG 25 2011

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

RECEIVED

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other Water Injection

2. Name of Operator

EOG Resources Inc.

3a. Address

P.O. Box 2267 Midland, Texas 79702

3b. Phone No. (include area code)

432 686 3689

4. Location of Well (Footage, Sec, T, R, M, or Survey Description)

S/L 2213' FNL & 1920' FEL, Sec 12, T25S, R33E

BHL 2421' FSL & 380' FWL, Sec 12, T25S, R33E

5. Lease Serial No

NM30400

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No

Red Hills North Unit

8. Well Name and No.

Red Hills North Unit 213

9. API Well No

30-025-36584

10. Field and Pool, or Exploratory Area

Red Hills; Bone Spring

11. County or Parish, State

Lea

NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent☐ Subsequent Report☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize☐ Alter Casing☐ Casing Repair☐ Change Plans☐ Convert to Injection☐ Deepen☐ Fracture Treat☐ New Construction☐ Plug and Abandon☐ Plug Back☐ Production (Start/Resume)☐ Reclamation☐ Recomplete☐ Temporarily Abandon☐ Water Disposal☐ Water Shut-Off☐ Well Integrity☒ Other Repairs

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

Pull pipe & packer, redress packer, run packer and pipe back in hole, hydro test pipe as run back in hole. Circulate packer fluid, flange up and wait on OCD to load and test with chart.

Contact BLM to witness MET
As per COAs

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

APPROVED

AUG 20 2011

/s/ JD Whitlock Jr

BUREAU OF LAND MANAGEMENT
CARLSBAD FIELD OFFICE14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Renee Jarratt

Title Regulatory Analyst

Signature

Renee JarrattDate 07/20/11

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office



Red Hills North Unit No. 213


2213' FNL & 1920' FEL

Sec. 12-25S-33E

Lea County, New Mexico

API 30-025-36584

AFE 102825

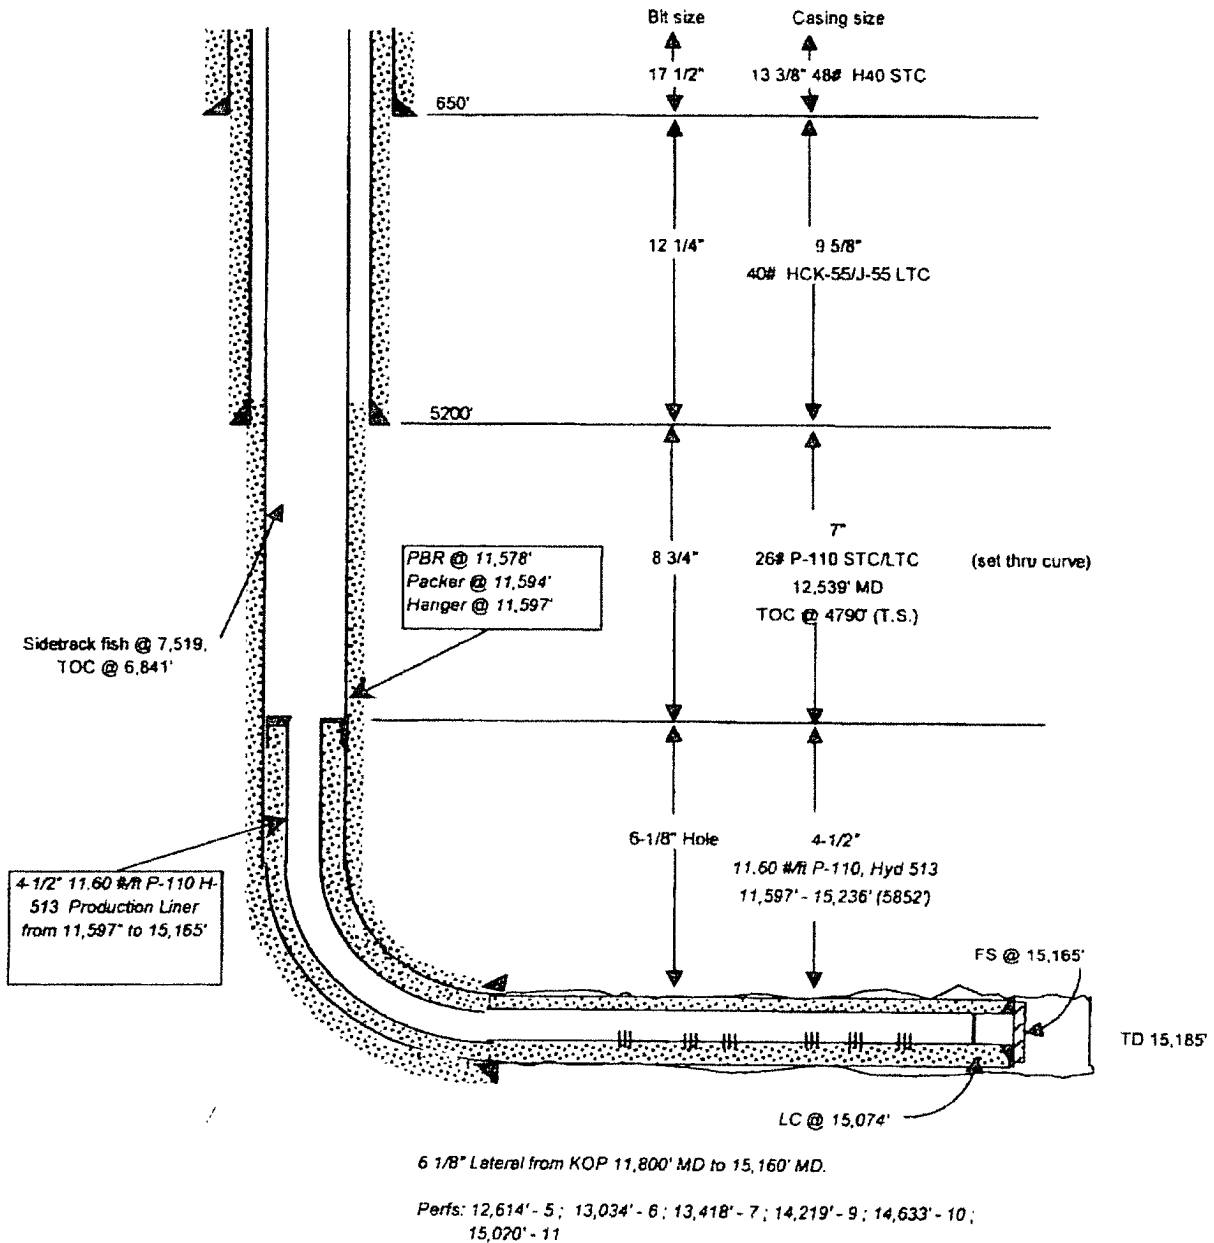

5/3/2004

Conditions of Approval: Wells with Packers*

EOG Resources Inc.
Red Hills North Unit 213
August 03, 2011

1. Conduct a Mechanical Integrity Test of the tubing/casing annulus after a tubing, packer or casing seal is established. Repair that seal any time more than five barrels of packer fluid is replaced within 30 days.
 - a. The minimum test pressure should be 500 psig for 30 minutes or 300 psig for 60 minutes, with 200 psig differentials between tubing and casing pressure (at test time) but no more than 70% of casing burst pressure as described by Onshore Order 2.III.B.1.h. (The tubing or reservoir pressure may need to be reduced). An alternate method for a BLM approved MIT is to have the fluid filled system open to atmospheric pressure and have a loss of less than five barrels in 30 days witnessed by a BLM authorized officer.
 - b. Document the pressure test on a calibrated recorder chart registering within 25 to 85 per cent of its full range. Greater than 10% pressure leakoff will be viewed as a failed MIT. Less than 10% pressure leakoff will be evaluated site specifically and may restrict injection approval.
 - c. Notify Paul R. Swartz at 575-234-5985 and/or 575-200-7902 at least 24 hours before the test. If there is no response, notify the BLM on call drilling phone, 575-361-2822.
 - d. Submit a subsequent Sundry Form 3160-5 relating the MIT activity. Include a copy of the recorded MIT pressure chart. List the name of the BLM witness, or the notified person and date of notification. NMOCD is to retain the original recorded MIT chart. ✓
 - e. Use of tubing internal protection, on/off tubing equipment just above the packer, and a profile nipple installation is required. The setting depths and descriptions of each are to be included in the subsequent sundry. List (by date) descriptions of daily activity of any previously unreported wellbore work.
 - f. **Submit the original subsequent sundry with three copies to BLM Carlsbad.**
2. Compliance with a NMOCD Administrative Order is required, submit documentation of that authorization.
 - a. Approved injection pressure compliance is required.
 - b. If injection pressure exceeds the approved pressure you are required to reduce that pressure and notify the BLM within 24 hours.
 - c. When injection pressure is within 50 psig of the maximum pressure, install automation equipment that will prevent exceeding that maximum.
 - i. Submit a subsequent report (Sundry Form 3160-5) describing the installed automation equipment within 30 days.
 - e. Other unexplained significant variations of rate or pressure to be reported within 5 days of notice.

3. The casing/tubing annulus is required to be monitored for communication with injection fluid or loss of casing integrity.
- a. The annulus is to be maintained full of packer fluid at atmospheric pressure. Installation of equipment that will display on site, continuous open to the air fluid level is required. A BLM inspector may request verification of this fluid level at any time.
 - b. **Submit a subsequent report (Sundry Form 3160-5)** describing the installation of packer fluid level monitoring equipment within 30 days of this approval.
 - c. The operator shall keep monthly records documenting that the casing annulus is fluid filled. A suggested format for these records is available from the BLM Carlsbad Field Office. Copies of those records shall be furnished at the request of a BLM authorized officer.
 - d. Loss of packer fluid above five barrels per month requires notification of the BLM authorized officer within 5 days.
 - e. Gain of annular fluid requires notification within 24 hours. Cease injection and maintain a production casing pressure of Opsia. Notify the BLM's authorized officer (Paul R. Swartz at 575-200-7902). If there is no response, notify the BLM on call drilling phone, 575-361-2822.
 - f. Also submit to this office a (Sundry Form 3160-5) Notice of Intent (NOI) for approval by BLM and NMOCD with a detailed plan for correction and the anticipated date of correction. Verbal approval for the plan may be given by a BLM authorized officer, with the NOI filed within five business days.
 - g. After the repairs submit a (Sundry Form 3160-5) Subsequent report, describing the repair(s) and Mechanical Integrity Test as per item 1 above.

*COA's prepared by Paul R. Swartz