

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OCD

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

MAY 08 2014

WELL API NO. 30-025-26948
5. Indicate Type of Lease STATE FEE X
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name E.C. WINTERS
8. Well Number 002
9. OGRID Number 162683
10. Pool name or Wildcat JALMAT (OIL)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,071' - GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well X Gas Well Other

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location

Unit Letter: H : 1980 feet from the NORTH line and 990 feet from the EAST line
Section 18 Township 25S Range 37E NMPM LEA County

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON X
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 5-1/2" CIBP @ 2,750'; PUMP 25 SXS. CMT. @ 2,750'-2,580' (B/SALT); CIRC. WELL W/ PXA MUD.
- 2) PUMP 35 SXS. CMT. @ 1,210'-995' (T/SALT, T/ANHY.); WOC X TAG CMT. PLUG.
- 3) MIX X CIRC. TO SURF. 65 SXS. CMT. @ 455'-3'.
- 4) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David A. Eyler TITLE: AGENT

DATE: 05/02/14

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILGRO-RES.COM PHONE: 432.687.3033

For State Use Only

APPROVED BY: Mary BrownTITLE: Dist. SupervisorDATE: 5/8/2014

Conditions of Approval (if any):

MAY 12 2014

CIMAREX

Cimarex Energy Co. of Colorado

EC Winters #2

1980' FNL & 990' FEL

Sec. 18, T-25-S, R-37-E, Lea Co., NM

S. Gengler/J. Piwetz 30-025-26948 4/16/2014

8-5/8", 24# J-55 csg @ 415'
cmtd w/ 300 sx, cmt circ

TUBING DETAIL (6/22/2006)

92 Jts 2-3/8" 4.7# 8rd J-55 Tbg 2879.00'

1 ea 2-3/8" API SN = 1.10'

1 jt 2-3/8" BP MA = 31.00'

ROD DETAIL (6/22/2006)

1 ea 1-1/4" x 22' PSPR + 1-1/2" x 10' PRL

115 3/4" x 25' rods


1 ea 2" x 1-1/2" x 12' RHBC Pump

Yates perfs (2784' - 2855') 16 holes

PBTD @ 2947'

5-1/2", 17# J-55 @ 3030' cmtd w/ 550 sx, cmt circ

TD @ 3030'

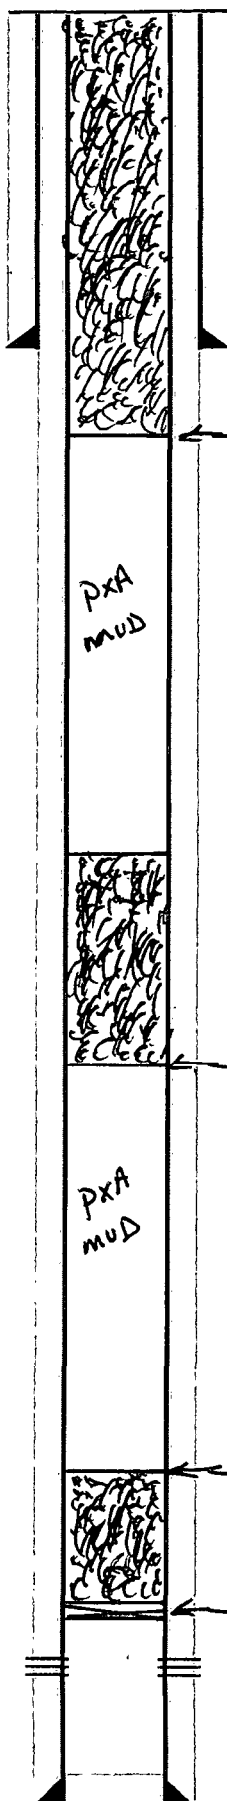

8-5/8", 24# J-55 csg @ 415'
cmtd w/ 300 sx, cmt circ

CIRC. 65 SX5. CMT. CP 455'-3'

PXA
MUD

Pump 35 SX5. CMT. CP 1210'-995' - TAG

PXA
MUD

Pump 25 SX5. CMT. @ 2750'-2580'

SET 5 1/2" C.D.B.P. @ 2750'

Yates perms (2784' - 2855') 16 holes

PBTD @ 2947'

5-1/2", 17# J-55 @ 3030' cmtd w/ 550 sx, cmt circ
TD @ 3030'

DAE 05/02/14