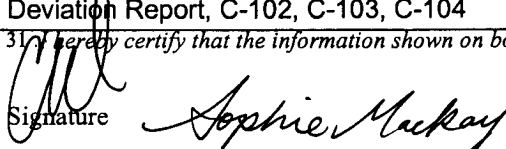


Submit To Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505	State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-105 Revised June 10, 2003
		WELL API NO. 30-025-38230
		5. Indicate Type of Lease STATE ☒ FEE ☐
		State Oil & Gas Lease No. BO-0085-0016
WELL COMPLETION OR RECOMPLETION REPORT AND LOG		
1a. Type of Well: OIL WELL ☒ GAS WELL ☐ DRY ☐ OTHER _____		7. Lease Name or Unit Agreement Name STATE DA
b. Type of Completion: NEW ☒ WORK ☐ DEEPEN ☐ PLUG ☐ DIFF. WELL OVER BACK RESVR. ☐ OTHER		
2. Name of Operator Apache Corporation		8. Well No. 22
3. Address of Operator 6120 S Yale Ave, Suite 1500 Tulsa, OK 74136-4224		9. Pool name or Wellcat Eunice; Bli-Tu-Dri, North
4. Well Location Unit Letter K : 2630 Feet From The South Line and 2610 Feet From The West Line Section 16 Township 21S Range 37E NMPM Lea County		
10. Date Spudded 02/28/2007	11. Date T.D. Reached 03/13/2007	12. Date Compl. (Ready to Prod.) 04/16/2007
13. Elevations (DF& RKB, RT, GR, etc.) 3464'		14. Elev. Casinghead
15. Total Depth 6793'	16. Plug Back T.D. 6791'	17. If Multiple Compl. How Many Zones? 3
18. Intervals Drilled By X		Rotary Tools X
19. Producing Interval(s), of this completion - Top, Bottom, Name 5597' - 6648' Eunice; Blinebry-Tubb-Drinkard, North (22900)		20. Was Directional Survey Made No
21. Type Electric and Other Logs Run DLL/MG, SD/DSN		22. Was Well Cored No
23. CASING RECORD (Report all strings set in well)		
CASING SIZE	WEIGHT LB./FT.	DEPTH SET
8-5/8"	24#	1255'
5-1/2"	17#	6793'
24. LINER RECORD		25. TUBING RECORD
SIZE	TOP	SIZE
		2-7/8"
26. Perforation record (interval, size, and number) Dri: 6538-44', 60-64', 6578-82', 6610-16', 6644-48' 2 SPF Tu: 6086-92, 6170-76', 94-98', 6218-22', 64-70' 2 SPF Bli: 5597-5603', 5647-51', 71-75', 5762-66', 94-98', 5906-10' 2 SPF		27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED 6538 - 6648' 3Kgals 15%HCl, 42Kgals gel & 84K# 20/40 sd 6086 - 6270' 3Kgals 15%HCl, 36Kgals gel & 72K# 20/40 sd 5597 - 5910' 3Kgals 15%HCl, 37Kgals gel & 82K# 20/40sd
28. PRODUCTION		
Date First Production 04/16/2007		Production Method (Flowing, gas lift, pumping - Size and type pump) Rod Pump - Pumping
		Well Status (Prod. or Shut-in) Producing
Date of Test 04/24/2007	Hours Tested 24 hours	Choke Size
		Prod'n For Test Period
		Oil - Bbl 37
		Gas - MCF 403
		Water - Bbl. 41
		Gas - Oil Ratio 10,892
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate
		Oil - Bbl.
		Gas - MCF
		Water - Bbl.
		Oil Gravity - API - (Corr.) 34.1
29. Disposition of Gas (Sold, used for fuel, vented, etc.) Sold		Test Witnessed By Apache
30. List Attachments Deviation Report, C-102, C-103, C-104		
31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief		
Signature 	Printed Name Sophie Mackay	Title Engineering Tech
E-mail Address sophie.mackay@apachecorp.com		Date 04/25/2007

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn "B"
T. Salt	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Yates 2642'	T. Miss	T. Cliff House	T. Leadville
T. 7 Rivers 2860'	T. Devonian	T. Menefee	T. Madison
T. Queen 3426'	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg 3725'	T. Montoya	T. Mancos	T. McCracken
T. San Andres 3983'	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta 5164'	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinebry 5599'	T. Gr. Wash	T. Morrison	T.
T. Tubb 6097'	T. Delaware Sand	T. Todilto	T.
T. Drinkard 6420'	T. Bone Springs	T. Entrada	T.
T. Abo 6681'	T. Rustler 1254'	T. Wingate	T.
T. Wolfcamp	T.	T. Chinle	T.
T. Penn	T.	T. Permian	T.
T. Cisco (Bough C)	T.	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from.....to..... No. 3, from.....to.....
No. 2, from.....to..... No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology