

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd. Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

RECEIVED CONSERVATION DIVISION
SEP 29 2010
HOBBSOCD

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-05871 ✓
5. Indicate Type of Lease STATE ☐ FEE ☒ ✓
6. State Oil & Gas Lease NO. ,
7. Lease Name or Unit Agreement Name J. W. Cooper "G" ✓
8. Well Number 3 ✓
9. OGRID Numer 873 ✓
10. Pool Name Monument Tubb ✓

SUNDRY NOTICES AND REPORTS ON WELLS
(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐ ✓

2. Name of Operator
Apache Corporation ✓

3. Address of Operator
303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705

4. Well Location
Unit Letter **E** : **1650'** feet from the **N** line and **330'** feet from th **W** line ✓
Section **3** Township **20S** Range **37E** NMPM County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3559' GL

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐
ALTERING CASING ☐
P AND A ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Guinn Burks TITLE Reclamation Foreman DATE 9/28/10

Type or print name Guinn Burks E-mail add. guinn.burks@apachecorp.com PHONE: 432-556-9143

For State Use Only

APPROVED BY: [Signature] TITLE STAFF MGR DATE 9-29-10

Conditions of Approval (if any):



LEASE NAME	J. W. Cooper "G"
WELL #	#3
API #	30-025-05871
COUNTY	Lea

WELL BORE INFO.

TOC surf.
18' hole size

16' 80# @ 135' w/ 40 sx cmt

TOC unknown

10" hole

8 1/4" 32# @ 1320' w/ 200 sx cmt

TOC unknown

8" hole

7" 24# @ 3665' w/ 250 sx cmt

TOC @ 3600' by TS

Perfs @ 3671' - 3889', sqz'd w/ 96 sx cmt

CIBP @ 4000' w/ no cmt

Perfs @ 4177' - 4214', sqz'd w/ 75 sx cmt

Perfs @ 4331' - 4346' sqz'd w/ 10 sx cmt

CIBP @ 5330' w/35' cmt

Paddock 5354' - 5378'


CIBP @ 6400' w/35' cmt

Tubb Perfs 6538' - 6649'

Tubb Perfs 6602' - 6648'

25 sx cmt plug @ 6724' - 6740'

4 1/2" (10.6 & 11.5 #) @ 6750' w/355 sx cmt

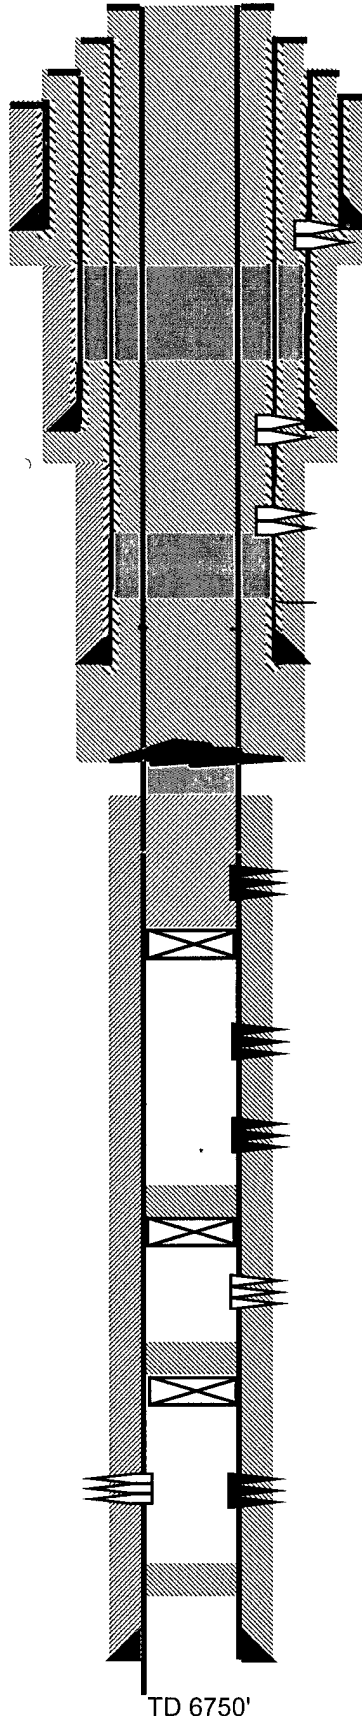

5. Perf & sqz 200 sx Class "C" cmt from 185' to surf. CIRC all strings to surf. (shoe & WB)

4. Perf & sqz 75 sx Class "C" cmt @ 1435' - 1270' WOC/TAG (top of salt & shoe)

3. Perf & sqz 50 sx Class "C" cmt @ 2835' - 2735' WOC/TAG (base of salt)

2. Cut 4 1/2" csg @ 3550' & POH, spot 25 sx Class "C" cmt from 3600' - 3450' WOC/TAG

1. MIRU, RIH & circ w/ MLF & Spot 25 sx Class "C" cmt from 4000' to 3622'.

TD 6750'



LEASE NAME	J. W. Cooper "G"
WELL #	#3
API #	30-025-05871
COUNTY	Lea

WELL BORE INFO.

TOC surf.
18' hole size

16' 80# @ 135' w/ 40 sx cmt

TOC unkown

10" hole

8 1/4" 32# @ 1320' w/ 200 sx cmt

TOC unkown

8" hole

7' 24# @ 3665' w/ 250 sx cmt

TOC @ 3600' by TS

Perfs @ 3671' - 3889' sqz'd w/ 96 sx cmt

CIBP @ 4000' w/ no cmt

Perfs @ 4177' - 4214' sqz'd w/ 75 sx cmt

Perfs @ 4331' - 4346' sqz'd w/ 10 sx cmt

CIBP @ 5330' w/35' cmt

Paddock 5354' - 5378'


CIBP @ 6400' w/35' cmt

Tubb Perfs 6538' - 6649'

Tubb Perfs 6602' - 6648'

25 sx cmt plug @ 6724' - 6740'

4 1/2" (10.6 & 11.5 #) @ 6750' w/355 sx cmt

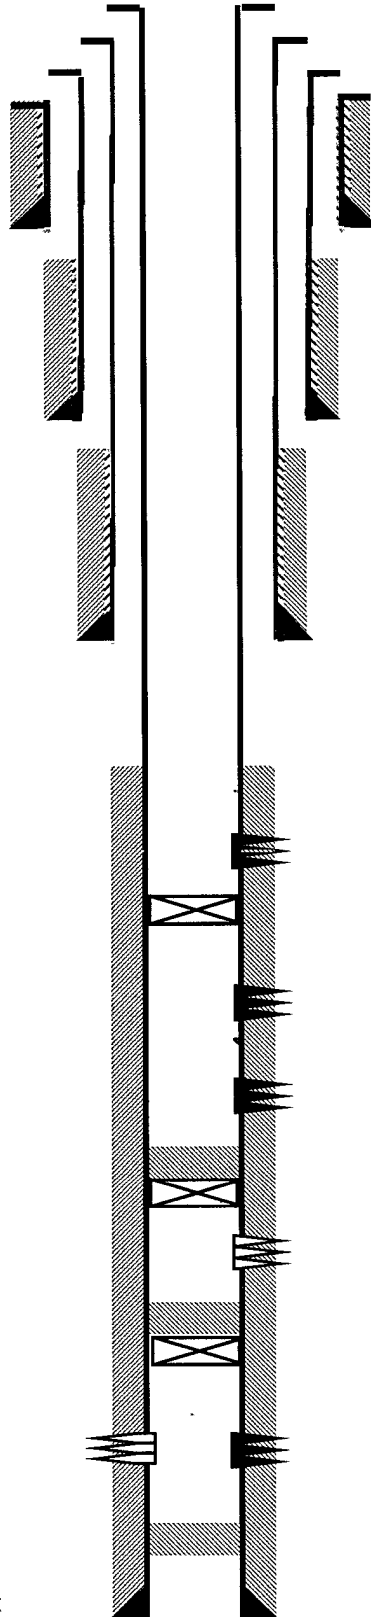

TD 6750'