


YATES PETROLEUM CORPORATION
East Sand Springs Unit #1
Section 5-T11S-R35E
Lea County, New Mexico

SUNDRY NOTICE CONTINUED:

3-30-2000 - Set packer at 11825'. Acidized perforations 11882-11886' with 1000 gallons of 7-1/2% Morrow acid and ball sealers. Swabbed & flow tested. Shut well in.
3-31-2000 - Opened well and flowed well down. Pumped 40 bbls 2% KCL. Loaded annulus with 16 bbls. Opened bypass - packer would not come loose. Worked 2-1/2 hours. Released packer and moved down hole. Released RBP. Moved up hole. Tried to set RBP and burned slips. Lost RBP. TIH and found RBP at 12388' - would not set. TOOH and changed tools. TIH and straddled perforations 11670-11676'. Shut well in for night.
4-1-2000 - Loaded annulus with 20 bbls. Bled off. Loaded tubing. Acidized perforations 11670-11676' with 1000 gallons 7-1/2% Morrow acid and ball sealers. Swabbed. Shut well in.
4-2-3-2000 - Bled well down. Swabbed. Shut well in.
4-4-2000 - Bled well down. Swabbed. Loaded tubing. Released packer and RBP. TOOH. Rigged up wireline. TIH with gauge ring and junk basket to 12100'. TOOH. TIH with 4-1/2" CIBP and set down at 3600'. TOOH. TIH with gauge ring and junk basket and set down at 3600'. Pushed down to 3800'. TOOH & had rubber in junk basket. TIH with CIBP and set CIBP at 12000'. TOOH. Rigged down wireline. Shut well in.
4-5-2000 - TIH with tubing open ended to 11615'. Nippled down BOP and full open valve. Nippled up tree. Flanged up. Rigged down pulling unit and moved off. Waiting for frac date.

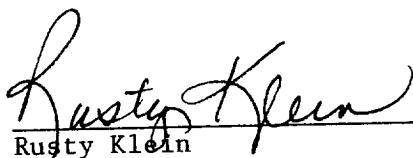

Rusty Klein
Operations Technician
April 15, 2000