


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

1960 JAN 21 AM 10:46

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

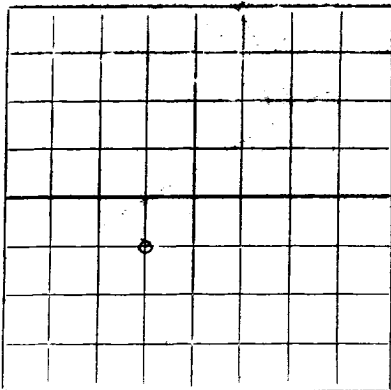

AREA 640 ACRES
LOCATE WELL CORRECTLY

COSDEN PETROLEUM CORPORATION
(Company or Operator)

STATE B
(Lease)

Well No. 2, in NE 1/4 of SW 1/4, of Sec. 33, T. 14 S., R. 33 E., NMPM.

Saunders Pool, Lea County.

Well is 2310 feet from South line and 2310 feet from West line of Section 33. If State Land the Oil and Gas Lease No. is E-6335.

Drilling Commenced Dec. 7, 1959. Drilling was Completed Jan. 11, 1960.

Name of Drilling Contractor Noble Drilling Company

Address Box 550, Midland, Texas

Elevation above sea level at Top of Tubing Head 4,212 GR. The information given is to be kept confidential until Jan. 18, 1960.

OIL SANDS OR ZONES

No. 1, from 9,820 to 9,860 No. 4, from to
No. 2, from 9,890 to 9,955 No. 5, from to
No. 3, from 9,955 to 9,980 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8	48	New	355	-0-	-0-		Surface Csg
8-5/8	24-32	New	4150	Guide	-0-		Intermediate Csg
5-1/2	17	New & Used	9980	Float	-0-		Production String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4	13-3/8	355	350	Pump & Plug		
12-1/4 & 11	8-5/8	4150	1000	" "		
7-7/8	5-1/2	9980	300	" "		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Perforated 9956-9961 - Acidized w/ 500 gal MCA - Swabbed well - Kicked off and flowed.

Result of Production Stimulation

Depth Cleaned Out

CORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 9,980 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing January 16, 1960
OIL WELL: The production during the first 11 hours was 314 barrels of liquid of which 99.8% was oil; % was emulsion; % water; and 2/10% was sediment. A.P.I. Gravity 42°
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy. Rustler	1515		T. Devonian		T. Ojo Alamo
T. Salt			T. Silurian		T. Kirtland-Fruitland
B. Salt			T. Montoya		T. Farmington
T. Yates	2588		T. Simpson		T. Pictured Cliffs
T. 7 Rivers			T. McKee		T. Menefee
T. Queen			T. Ellenburger		T. Point Lookout
T. Grayburg			T. Gr. Wash		T. Mancos
T. San Andres	4090		T. Granite		T. Dakota
T. Glorieta	5665		T.		T. Morrison
T. Drinkard			T.		T. Penn
T. Tubbs	6993		T.		T.
T. Abo	7665		T.		T.
T. Wolfcamp	9165		T.		T.
T. Penn	9800		T.		T.
T. Miss			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	355	355	Surface & Red Beds				
355	1475	1120	Red Beds				
1475	2996	1521	Anhy & Salt				
2996	4097	1101	Anhy				
4097	8243	4146	Lime				
8243	8354	111	Lime & Shale				
8354	9257	903	Lime				
9257	9310	53	Lime & Chert				
9310	9980	670	Lime T.D.				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

January 18, 1960 (Date)
Company or Operator COSDEN PETROLEUM CORPORATION Address Box 1311, Big Spring, Texas
Name H.T. Bratcher Position or Title Supt. of Production