

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

New Mexico Oil Conservation Division
625 N. French Drive
Hobbs, NM 88240
FORM APPROVED
OMB No. 1004-0135
Expires July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
LC 029410A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
M.C.A. #213

9. API Well No.
30-025-00757

10. Field and Pool, or Exploratory Area
Maljamar GB-SA

11. County or Parish, State
Lea County, NM

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other Injection Well

2. Name of Operator
Conoco, Inc.

3a. Address
10 Desta Dr Ste 100W, Midland, TX

3b. Phone No. (include area code)
915-686-5424

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
U.L.-N 660' FSL & 1980' FWL
Section 29, T-17S, R-32E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

- Set a cement retainer at 3235' and squeeze 25 sxs cement thru retainer to fill liner.
- Circulate the hole with gelled brine mud.
- Perforate the 4 1/2" and 7" casings at 2050'.
- Set a cement retainer at 1950' and squeeze 35 sxs cement thru retainer and perfs at 2050'.
- Cut and pull the 4 1/2" casing at 1150'.
- Cut and pull the 7" casing at 1140'.
- Spot 50 sxs cement plug 1200'-1015'. Tag plug.
- Perforate the 8 5/8" casing at 350'.
- Circulate 250 sxs cement thru perfs at 350' and fill hole to surface.
- Install dryhole marker and clear location.

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) BEN FISHER Title Field Supervisor

Signature Ben Fisher Date 9-30-99

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by [Signature] Title PETROLEUM ENGINEER Date 007 13 1999

Office _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse) BLM (6), UMOCO (1), SHEAR, Ponca, Cost Asst, File Room

RECEIVED
OCT 06 1999
BUREAU
ROSWELL N.M.
MENT

CURRENT WELLBORE
9/27/99

Elev. = 3918' GL

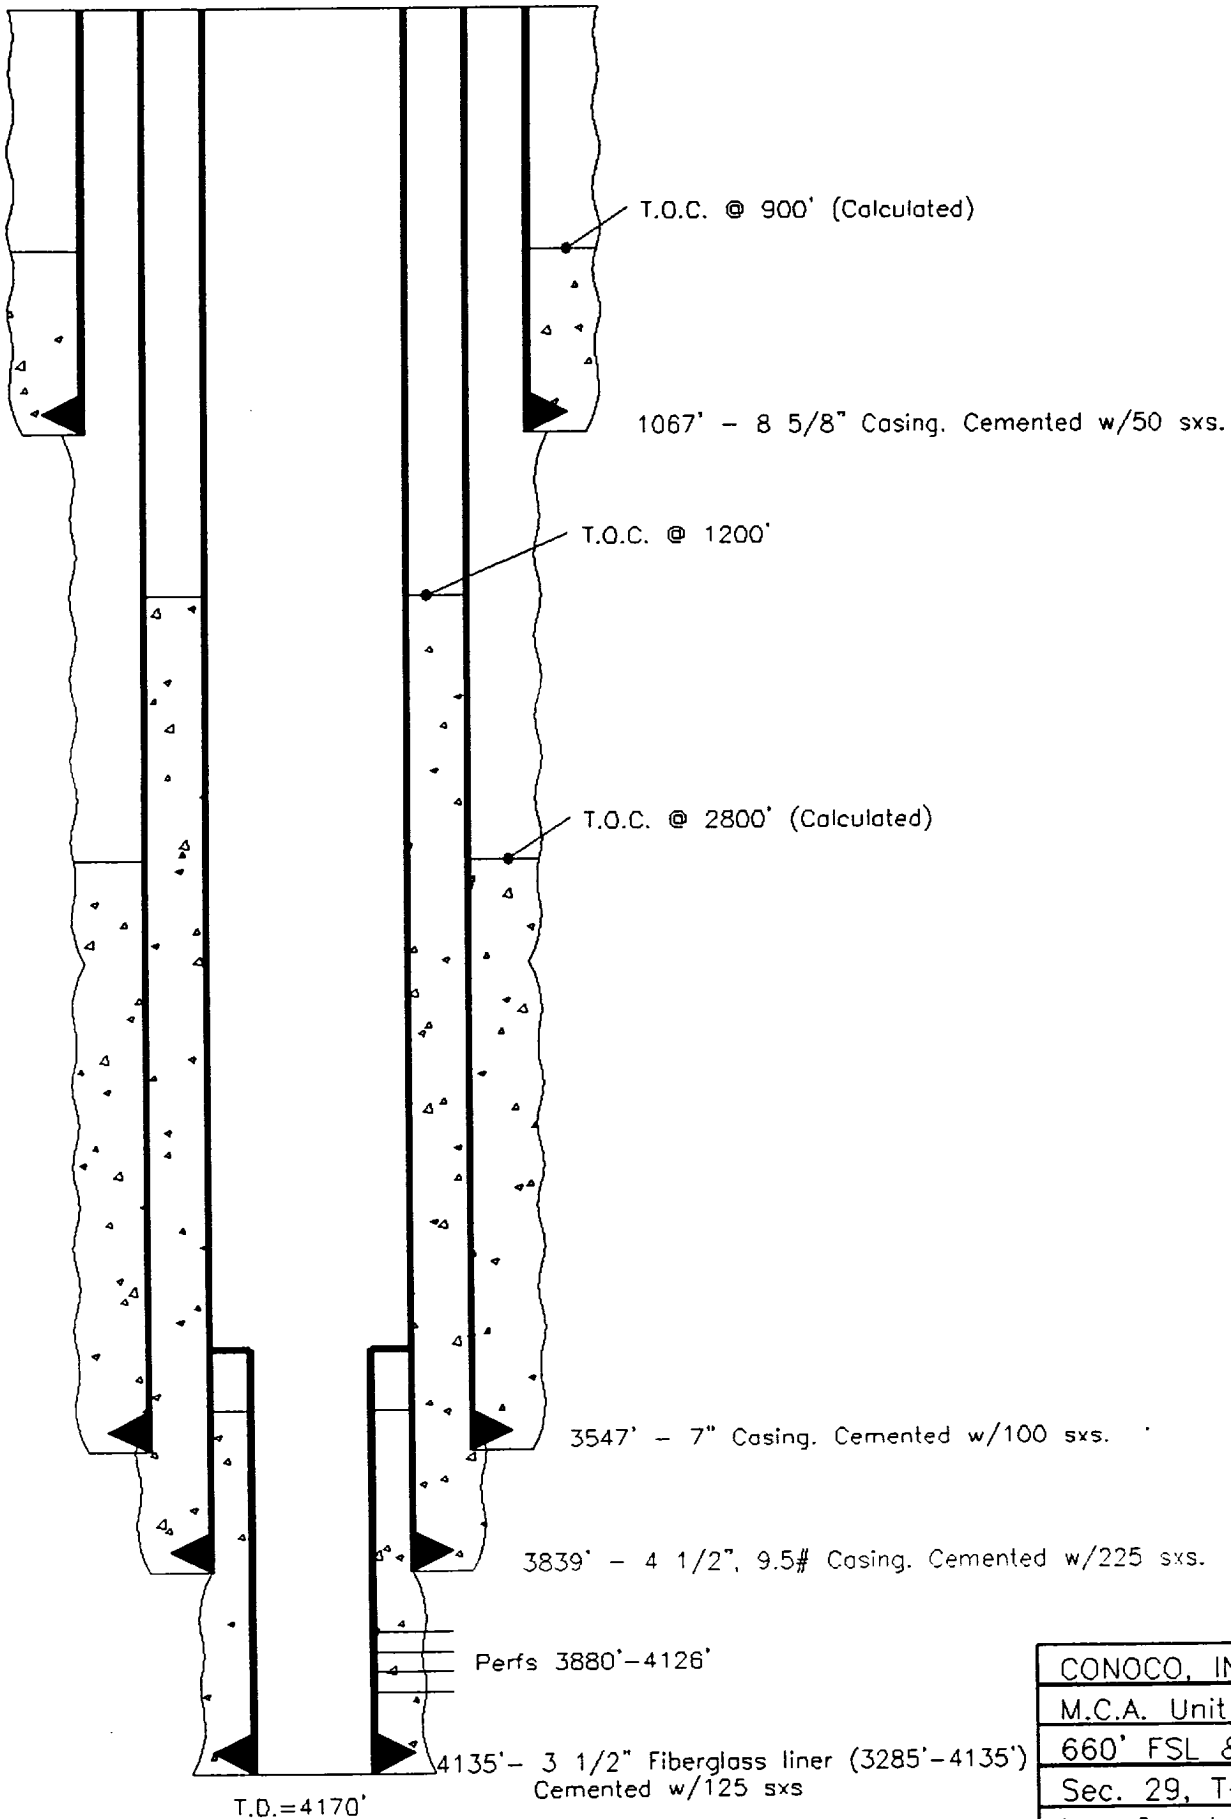

CONOCO, INC.
M.C.A. Unit #213
660' FSL & 1980' FWL
Sec. 29, T-17S, R-32E
Lea County, NM

ROSWELL, N.M.
OCT 06 1999
BUREAU OF RECEIVED

PROPOSED PLUG AND ABANDONMENT
9/27/99

Elev. = 3918' GL

CIRCULATE 250 SXS CEMENT THRU PERFS AT 350'
TO FILL HOLE TO SURFACE

PERFORATE 8 5/8" CSG. AT 350'

T.O.C. @ 900' (Calculated)

SPOT 50 SXS CEMENT PLUG 1200'-1015'
TAG PLUG

1067' - 8 5/8" Casing. Cemented w/50 sxs.

CUT AND PULL THE 7" CSG. AT 1140'
T.O.C. @ 1200'

CUT AND PULL THE 4 1/2" CSG. AT 1150'

SET A CEMENT RETAINER @ 1950'
SQUEEZE 35 SXS CEMENT THRU RETAINER
AND PERFS AT 2050'

PERFORATE CASINGS AT 2050'
T.O.C. @ 2800' (Calculated)

SET A CEMENT RETAINER @ 3235'
SQUEEZE 25 SXS CEMENT THRU RETAINER
TO FILL 3 1/2" LINER

3547' - 7" Casing. Cemented w/100 sxs.

3839' - 4 1/2", 9.5# Casing. Cemented w/225 sxs.

Perfs 3880'-4126'

4135' - 3 1/2" Fiberglass liner (3285'-4135')
Cemented w/125 sxs

T.D.=4170'

CONOCO, INC.
M.C.A. Unit #213
660' FSL & 1980' FWL
Sec. 29, T-17S, R-32E
Lea County, NM

ROSWELL, N.M.
OCT 06 1999
RECEIVED
BUREAU

10/6/99