


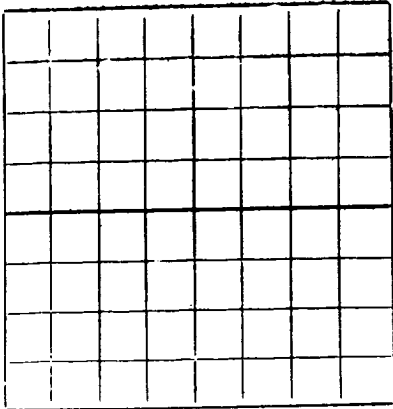

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

Carper Drilling Company, Inc. - Artesia, New Mexico (Company or Operator) Carper State 14 (Lease)

Well No. 1, in SE 1/4 of SE 1/4, of Sec. 14, T. 18 S, R. 33 E, NMPM.

E K Queen Pool, Lea County.

Well is 660 feet from South line and 660 feet from East line of Section 14. If State Land the Oil and Gas Lease No. is E - 2594

Drilling Commenced 11-7, 19 56 Drilling was Completed 11-19, 19 56

Name of Drilling Contractor Carper Drilling Company, Inc.

Address Artesia, New Mexico

Elevation above sea level at Top of Tubing Head 3909 The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 4291 to 4309 No. 4, from to

No. 2, from 4313 to 4315 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8	24#	New	273'	Guide			
5 1/2	14#	"	4361'	"			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 5/8	288	200	Halliburton		
7 7/8	5 1/2	4354	600 poamix	4% gel Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Treated perforations from 4291'-4309' & 4313'-4315' with 500 gals MCA, 10,000 gals lease crude, 15,000# sand and 400# of adomite

Result of Production Stimulation No natural test made, after recovering all frac & flush oil, well pumped 72 barrels of oil in 24 hours.

Depth Cleaned Out 4327'

REC OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 4355 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing January 6, 1957

OIL WELL: The production during the first 24 hours was 72 barrels of liquid of which 100 % was oil; % was emulsion; % water, and % was sediment. A.P.I. Gravity 30° est.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt 2900	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen 4274	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1610	1610	red bed				
1610	3004	1394	anhyd. & salt				
3004	3971	967	Anhyd.				
3971	4032	61	" & lime				
4032	4355	323	Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

January 15, 1957 (Date)
Company or Operator Carper Drilling Co., Inc. Address Artesia, New Mexico
Name J. Marshall Position or Title Vice-President