<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170 District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

# **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form C-101 August 1, 2011

Permit 242006

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE
--

AT LIGATION ON LIMIT TO DIVEL, NE-ENTER, DEET EN, TEOODACH, ON ADD A ZONE							
Operator Name and Address     ONEENERGY PARTN	2. OGRID Number 372031						
2929 Allen Parkway Houston , TX 77019	3. API Number 30-025-44029						
4. Property Code 319588	5. Property Name SUPER FEE WCA	6. Well No. 001H					
	7. Surface Location						

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
N	25	24S	34E	N	433	S	1930	W	Lea

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
С	25	24S	34E	С	380	N	1670	W	Lea

#### 9. Pool Information

WC-025 G-09 S253402N;WOLFCAMP	98116

#### Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type Private	15. Ground Level Elevation 3408
16. Multiple	17. Proposed Depth 17334	18. Formation Wolfcamp		20. Spud Date 11/20/2017
		Distance from nearest fresh water well		Distance to nearest surface water

## ☑ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

	= · · · · · · · · · · · · · · · · · · ·										
Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC					
Surf	17.5	13.375	54.5	900	660	0					
Int1	12.25	9.625	40	4950	1600	0					
Int2	8.75	7	29	12305	1042	0					
Prod	6.125	4.5	13.5	17334	222	12205					

## **Casing/Cement Program: Additional Comments**

22. Proposed Blowout Prevention Program	n
---	---

Туре	Working Pressure	Test Pressure	Manufacturer
Double Ram	3000	5000	

knowledge and b	pelief. have complied with 19.15.14.9 (A)	true and complete to the best of my  NMAC ⊠ and/or 19.15.14.9 (B) NMAC		OIL CONSER	RVATION DIVISION
Printed Name:	Electronically filed by David Ram	sden-Wood	Approved By:	Paul Kautz	
Title:	President & Chief Operating Office	President & Chief Operating Officer			
Email Address:	drw@oneenergypartners.com	Approved Date:	9/20/2017	Expiration Date: 9/20/2019	
Date:	9/19/2017	Phone: 303-253-0707	Conditions of App	roval Attached	

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Arlesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

# State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

■ AMENDED REPORT

#### WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	<sup>3</sup> Pool Code 98116	<sup>3</sup> Pool Name WC-025 G-09 S253402N;WOLFCAMP		
4 Property Code	SUPER FEI		* Well Number 1H	
7 OGRID No. 372031	*Operator ! OneEnergy Partners		*Elevation 3408.5	


#### "Surface Location

										_
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	٦
N	25	24S	34E	27999	433	SOUTH	1930	WEST	LEA	1

#### "Bottom Hole Location If Different From Surface

UL or lot no. C	Section 25	Town 24		Range 34E	Lot Idn	Feet from the 380	North/South line NORTH	Feet from the 1670	East/West line WEST	County LEA
12 Dedicated Acres 160		33 Joint or Infill		14 Consolidation Code		18 Order No.				

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

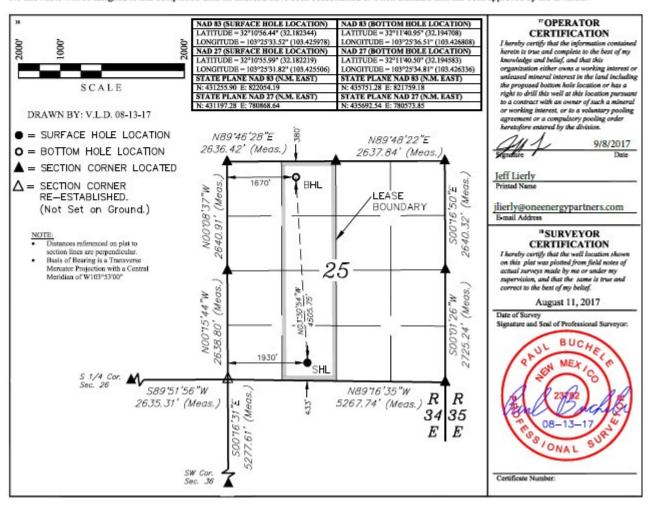

Form APD Comments

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

Permit 242006

#### PERMIT COMMENTS

Operator Name and Address:	API Number:		
ONEENERGY PARTNERS OPERATING, LLC [372031]	30-025-44029		
2929 Allen Parkway	Well:		
Houston , TX 77019	SUPER FEE WCA #001H		

Created By Comment Comment Date

Form APD Conditions

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505** 

Permit 242006

#### PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
ONEENERGY PARTNERS OPERATING, LLC [372031]	30-025-44029
2929 Allen Parkway	Well:
Houston, TX 77019	SUPER FEE WCA #001H

OCD Reviewer	Condition
pkautz	The operator shall keep a copy of the approved form C-101 and a copy of these conditions of approval at the well site.
pkautz	Will require a directional survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Pit construction and closure must satisfy all requirements of your approved plan.
pkautz	If using a pit for drilling and completion operations, must have an approved pit from prior to spudding the well.
pkautz	If cement does not circulate to surface, must run temperature survey or other log to determine top of cement
pkautz	Surface casing must be set 25' below top of Rustler Anhydrite in order to seal off protectable water
pkautz	Operator shall notify appropriate District office when setting conductor pipe.
pkautz	1)- The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud 2)- Drilling Sundries Form C-103 (Casing and Cement test are to be submitted within 10 days 3)- Completion Reports & Logs are to be submitted within 20 days 4)- Deviation / Directional Drill Survey are to be filed with or prior to C-104
pkautz	It is the operator's responsibility to monitor cancellation dates of approved APDs. APD's are good for 2 years and may be extended for one year. Only one 1 year extension will be granted if submitted by C-103 before expiration date. After expiration date or after a 1 year extension must submit new APD.
pkautz	If an APD expires and if site construction has occurred, site remediation is required.
pkautz	Lost Circulation - Must notify OCD Hobbs Office if lost circulation is encountered at 575-370-3186
pkautz	Water flows - Must notify OCD Hobbs Office of any water flows in the Castile Formation at 575-370-3186. Report depth and flow rate
pkautz	Stage Tool - 1) Must notify OCD Hobbs Office prior to running Stage Tool at 575-370-3186 2) If using Stage Tool on Surface casing, Stage Tool must be set greater than 350' from surface and a minimum of 200 feet above surface shoe. 3) When using a Stage Tool on Intermediate or Production Casing Stage must be a minimum of 50 feet below previous casing shoe.
pkautz	Gas Capture Plan - Operator to Submit Gas Capture Plan ASAP.
pkautz	1) SURFACE & INTERMEDIATE1 CASING - Cement must circulate to surface — 2) INTERMEDIATE2 CASING - Cement must tie back into intermediate1 casing — 3) PRODUCTION CASING - Cement must tie back into intermediate2 casing —