



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# Sundry Print Report

06/07/2021

<b>Well Name:</b> WEST BISTI COAL 14 COM	<b>Well Location:</b> T25N / R13W / SEC 14 / NENW / 36.406565 / 108.189718	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 1T	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMNM69534	<b>Unit or CA Name:</b> WEST BISTI COAL 14 COM	<b>Unit or CA Number:</b> NMNM89347
<b>US Well Number:</b> 3004533371	<b>Well Status:</b> Gas Well Shut In	<b>Operator:</b> DJR OPERATING LLC

Received

JUN 09 2021

## Notice of Intent

Farmington Field Office  
Bureau of Land Management

**Type of Submission:** Notice of Intent

**Type of Action:** Plug and Abandonment

**Date Sundry Submitted:** 01/25/2021

**Time Sundry Submitted:** 10:09

**Date proposed operation will begin:** 01/25/2021

**Procedure Description:** DJR Operating, LLC requests permission to Plug & Abandon the subject well according to the attached Procedure, Current & Proposed Wellbore Diagram and Reclamation Plan.

## Surface Disturbance

**Is any additional surface disturbance proposed?:** No

## NOI Attachments

### Procedure Description

Reclamation\_Plan\_West\_Bisti\_Coal\_14\_COM\_1T\_20210125100909.pdf

Proposed\_WBD\_West\_Bisti\_Coal\_14\_COM\_1T\_20210125100900.pdf

Current\_WBD\_West\_Bisti\_Coal\_14\_COM\_1T\_20210125100851.pdf

PA\_Procedure\_West\_Bisti\_Coal\_14\_COM\_1T\_20210125100841.pdf

<

<b>Well Name:</b> WEST BISTI COAL 14 COM	<b>Well Location:</b> T25N / R13W / SEC 14 / NENW / 36.406565 / 108.189718	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 1T	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMNM69534	<b>Unit or CA Name:</b> WEST BISTI COAL 14 COM	<b>Unit or CA Number:</b> NMNM89347
<b>US Well Number:</b> 3004533371	<b>Well Status:</b> Gas Well Shut In	<b>Operator:</b> DJR OPERATING LLC

**Conditions of Approval**

**Additional Reviews**

West\_Bisti\_Coal\_14\_Com\_1T\_Geo\_Rpt\_20210511160455.pdf

I certify that the foregoing is true and correct. Title 18 U.S.C Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United State any false, fictitious or fraudulent statements or representations as to any matter with its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: JAN 25, 2021 12:31

Name: DJR OPERATING, LLC

Title: Regulatory Specialist

Street Address: 1 Road 3263

City: Aztec

State: NM

Phone: (505) 632-3476

Email address: sford@djrlc.com

BLM POC Name: DAVE J MANKIEWICZ

BLM POC Title: AFM-Minerals

BLM POC Phone: 5055647760

BLM POC Email Address: DMANKIEW@BLM.GOV

Disposition: Approved

Disposition Date: 6/9/2021

Signature: 

**Plug and Abandonment Procedure**  
**for**  
**DJR Operating, LLC**  
**West Bisti Coal 14 Com 1T**  
**API # 30-045-33371**  
**NE/NW, Unit C, Sec. 14, T25N, R13W**  
**San Juan County, NM**

**I.**

1. Hold pre-job meeting, comply with all NMOCD, BLM and environmental regulations.
2. Check and record tubing, casing and bradenhead pressures.
3. Remove existing piping from casing valve, RU blow lines from casing valves and blow down casing pressure. Kill well as necessary. Ensure that well is dead or on a vacuum.
4. Trip out of hole with rods and pump. Lay down to be sent in for storage/salvage.
5. ND WH, NU BOP, function test BOP.
6. Trip out of hole with 2 3/8" tubing. LD tubing to be sent in for storage/salvage.

**II.**

7. PU workstring, TIH with bit and scraper, make sure that the bit and scraper will go below 1270'. TOOH.
8. PU and RIH with a 5 1/2" cement retainer. Set the CR at +/- 1270'. Pressure test tubing to 1000 psi, sting out of CR, test casing to 600 psi. If casing does not test, contact engineering.

**Provided that casing test was good, proceed to step 9.**

9. RU cement equipment. Pump water to assure that tubing is clear.
10. Plug 1. Mix and attempt to pump 10 sx class G cement through cement retainer and displace with water. If zone pressures up, sting back out of retainer and continue with Plug 2.

11. Plug 2. Fruitland, Kirtland, Ojo Alamo, and surface casing shoe. From 1270' to surface, mix and pump cement until cement circulation is achieved at surface.
12. RD cementing equipment. Cut off wellhead, fill annuli with cement as necessary. Install P&A marker as per regulatory requirements. Record GPS coordinates for P&A marker and the final P&A report. Photograph the P&A marker and attach to the report.
13. RD and MO all rig and cement equipment. Assure that location is free of trash and contamination before moving off.
14. Send all reports and attachments to DJR Aztec office for regulatory filings.

**Note: All cement is to be class G mixed at 15.8 ppg, yield 1.15 cu ft / sx. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100 % excess.**

**DJR Operating, LLC**  
**Current Wellbore Diagram**

**Bisti Coal 14 Com 1T**

API # 30-045-33371

NE/NW, Unit C, Sec 14, T25N, R13W  
 San Juan County, NM

GL 6388'

KB 6400'

Spud Date 6/17/2008

**SURF CSG**

Hole size 12.25"  
 Csg Size: 8.625"  
 Wt: 24#  
 Grade: J-55  
 ID: 6.336"  
 Depth 141'  
 casing cap ft<sup>3</sup>/ft: 0.3575  
 TOC: Circ cmt  
 to surface

**FORMATION TOPS**


Formation	Surface
Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland Coal	919'
Pictured Cliffs	1363'

**PROD CSG**

Hole size 7.875"  
 Csg Size: 5.5"  
 Wt: 15.5#  
 Grade: J-55  
 ID: 4.95"  
 Depth 1458'  
 casing cap ft<sup>3</sup>/ft: 0.1336  
 8.625x5.5 cap ft<sup>3</sup>/ft 0.1926  
 TOC: Circ cmt  
 to surface

Fruitland Coal perms  
 1292-1344'

PBTD 1426'  
 TD 1500'

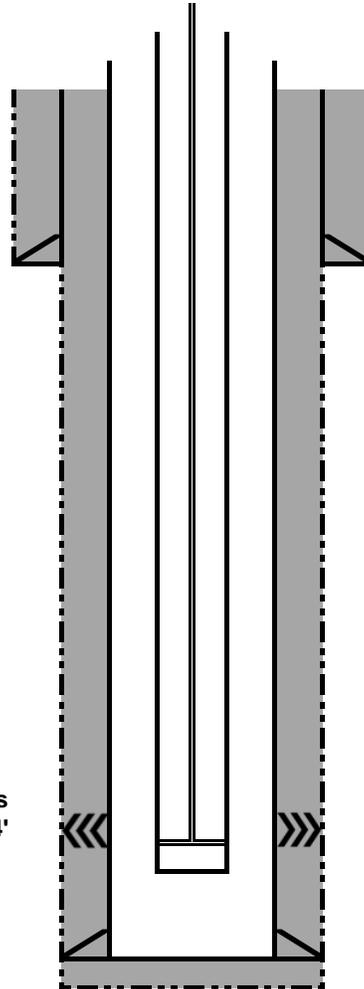

Production Tubing/Rod Detail
43 jts. 2.375" . EOT 1394'. SN 1358'
2"x1.5"x12' RWAC, 3'x.75" pony rod, 3 K-bars, 50x.75" plain rods, 2'x6'x8'x.75" pony rods.

**DJR Operating, LLC  
Proposed Wellbore Diagram**

**Bisti Coal 14 Com 1T**

API # 30-045-33371

NE/NW, Unit C, Sec 14, T25N, R13W  
San Juan County, NM

GL 6388'

KB 6400'

Spud Date 6/17/2008

**SURF CSG**

Hole size 12.25"  
Csg Size: 8.625"  
Wt: 24#  
Grade: J-55  
ID: 6.336"  
Depth 141'  
casing cap ft<sup>3</sup>/ft: 0.3575  
TOC: Circ cmt  
to surface

**FORMATION TOPS**

Formation	Surface
Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland	919'
Pictured Cliffs	1363'

**Plug 2:** 1270' to surface, to cover Fruitland, Kirtland, Ojo Alamo, surface shoe.


**PROD CSG**

Hole size 7.875"  
Csg Size: 5.5"  
Wt: 15.5#  
Grade: J-55  
ID: 4.95"  
Depth 1458'  
casing cap ft<sup>3</sup>/ft: 0.1336  
8.625x5.5 cap ft<sup>3</sup>/ft 0.1926  
TOC: Circ cmt  
to surface

Cement Ret. 1270'  
Fruitland Coal perms  
1292-1344'

**Plug 1:** Attempt to pump 10 sx class G cement through CR to Fruitland perms.

COTD 1426'  
TD 1500'

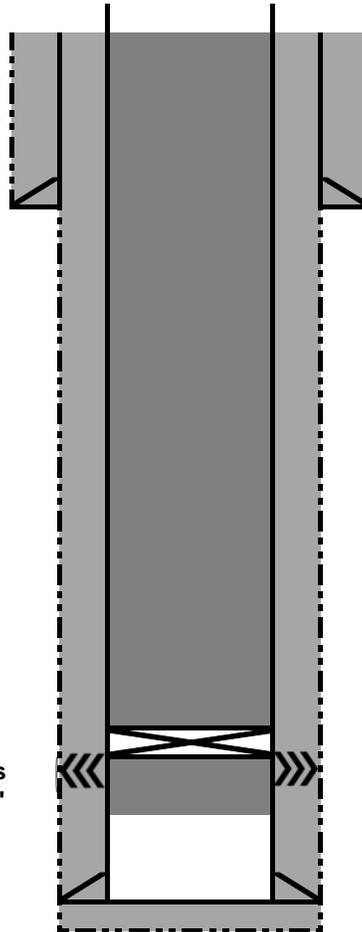

**GENERAL REQUIREMENTS FOR  
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES  
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
  - 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
  - 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
  - 4.3 Surface plugs may be no less than 50' in length.
  - 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
  - 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
  - 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H<sub>2</sub>S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

(October 2012 Revision)

## BLM FLUID MINERALS Geologic Report

**Date Completed:** 12/4/20

Well No. West Bisti Coal 14 Com # 1T	Location	690'	FNL &	2280'	FWL
Lease/Agreement # NMNM69534/NMNM89347	Sec. 14	T25N		R13W	
Operator DJR Operating LLC	County	San Juan	State	New Mexico	
Total Depth 1500'	PBTD 1500'	Formation Basin Fruitland Coal			
Elevation (GL) 6388'		Elevation (KB) 6402'			

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					Surface/Fresh water sands
Nacimiento Fm			Surface	*BSC	
Ojo Alamo Ss			BSC	182'	Aquifer (fresh water)
Kirtland Shale			182'	945'	
Fruitland Fm			1127'	1356'	Coal/Gas/Possible water
Pictured Cliffs Ss			1356'	1404'	Gas
Lewis Shale			1404'		
Chacra					Probable water or dry
Cliff House Ss (main)					Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos Shale					Source rock
Gallup					O&G/Water
Dakota					O&G/Water

Remarks:  
P & A

Reference Well:  
1) DJR Operating Fm. Tops  
Same

\* Behind Surface Casing

- The proposed plugging plan, if executed as presented, will adequately protect the freshwater sands in this well bore.

- Please ensure that the tops of the Pictured Cliffs and Fruitland formations as well as the entire Ojo Alamo aquifer, identified in this report, are isolated by proper placement of cement plugs. This will protect the freshwater sands in this well bore.

**Prepared by:** Walter Gage

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

COMMENTS

Action 31574

**COMMENTS**

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 31574
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

**COMMENTS**

Created By	Comment	Comment Date
kpickford	KP GEO Review 6/15/2021	6/15/2021

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 31574

**CONDITIONS**

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838 <hr/> Action Number: 31574 <hr/> Action Type: [C-103] NOI Plug & Abandon (C-103F)
---	--

**CONDITIONS**

Created By	Condition	Condition Date
kpickford	Notify NMOCD 24 Hours Prior to beginning operations	6/15/2021