

Well Name: CARSON UNIT	Well Location: T25N / R12W / SEC 11 / SWNW / 36.4178 / 108.08647	County or Parish/State: SAN JUAN / NM
Well Number: 206	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMSF078067	Unit or CA Name: CARSON UNIT--PC	Unit or CA Number: NMNM78385C
US Well Number: 300452549400S1	Well Status: Gas Well Shut In	Operator: DJR OPERATING LLC

Subsequent Report

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 04/28/2021

Time Sundry Submitted: 09:21

Date Operation Actually Began: 04/14/2021

Actual Procedure: The subject well was Plugged & Abandoned on 04/14/2021 per the attached detailed As Plugged Wellbore Diagram and Marker.

SR Attachments

Actual Procedure

Carson_206_PXA_Marker_20210428092021.pdf

Carson_Unit_206_EOWR___AsPlugged_WBD_20210428092020.pdf

Well Name: CARSON UNIT

Well Location: T25N / R12W / SEC 11 / SWNW / 36.4178 / 108.08647

County or Parish/State: SAN JUAN / NM

Well Number: 206

Type of Well: CONVENTIONAL GAS WELL

Allottee or Tribe Name:

Lease Number: NMSF078067

Unit or CA Name: CARSON UNIT--PC

Unit or CA Number: NMNM78385C

US Well Number: 300452549400S1

Well Status: Gas Well Shut In

Operator: DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: DACYE SHULL

Signed on: APR 28, 2021 09:21 AM

Name: DJR OPERATING LLC

Title: Regulatory Technician

Street Address: 1 ROAD 3263

City: AZTEC

State: NM

Phone: (505) 632-3476

Email address: DSHULL@DJRLLC.COM

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: WILLIAM F TAMBEKOU

BLM POC Title: PETROLEUM ENGINEER

BLM POC Phone: 7192698500

BLM POC Email Address: wtambekou@blm.gov

Disposition: Accepted

Disposition Date: 05/04/2021

Signature: William Max Tambekou

DJR Operating, LLC

Carson Unit 206

API # 30-045-25494

SW/NW, Unit E, Sec. 11, T25N, R12W

San Juan County, NM



P&A End of Well Report
DJR Operating, LLC
Carson Unit #206
API: 30-045-25494
SWNW E-11-25N-12W
San Juan County, NM

Spud Date: 01/14/1983

Plugged Date: 04/14/2021

Pictured Cliffs

4/12/21: Plug 1: Pictured Cliffs perms: Try to roll hole, did not circulate. Mix and pump 8 sx Class G cement + 2 % CaCl₂ from 1178'. WOC. Tagged at 1170'. Plug 2: Mix and pump 10 sx Class G cement from 1170'. Tagged plug 2 at 1040'.

4/13/21: PT casing, did not test. Run CBL: TOC at 204'. Plug 3: TIH to 1030'. Mix and pump 25 sx Class G cement + 2% CaCl₂ from 1030'. Pull up and reverse circulate from 208'.

Kirtland

4/14/21: Perf 6 holes at 198'. Plug 4: Could not circ out BH, (blocked off). Mix and pump 100' inside/outside from 198'. (12 sx Class G + 2% CaCl₂ out and 3 sx in). Plug 5: Surface shoe: Perf 4 holes at 88'. Mix and pump 20 sx Class G cement + 2% CaCl₂ via 2 7/8" casing at 1 bpm and 700 psi. WOC 1 hr. TOC in 2 7/8" csg at surf, in annulus at 5'. Install P&A marker. Mix and top off with 18 sx Class G cement.

All cement used: Class G cement mixed at 15.8 ppg, 1.15 yield.
BLM Representative onsite to witness: Gail Clayton

**DJR Operating, LLC
P&A End of Well Report**

Carson Unit 206

API # 30-045-25494
SW/NW Unit E Sec.11, T25N, R12W
San Juan County, NM

GL 6282'
KB 6286'
Spud Date 1/14/1983

SURF CSG

Hole size 9.875"
Csg Size: 7"
Wt: 23#
Grade: N/A
ID: 6.366"
Depth 89'
casing cap ft³/ft: 0.221
TOC: Circ to surf

FORMATION TOPS


Nacimiento
Ojo Alamo 124'
Kirtland
Fruitland 1133'
Pictured Cliffs 1152'

PROD CSG

Hole size 5.25"
Csg Size: 2.875"
Wt: 6.5#
Grade: J-55
ID: 2.441"
Depth 1313'
casing cap ft³/ft: 0.0325
7x2 7/8 capacity ft³/ft 0.176
TOC: Circ to surf

Fruitland Coal perms
1160'-1170'

PBTD 1288'
TD 1329'

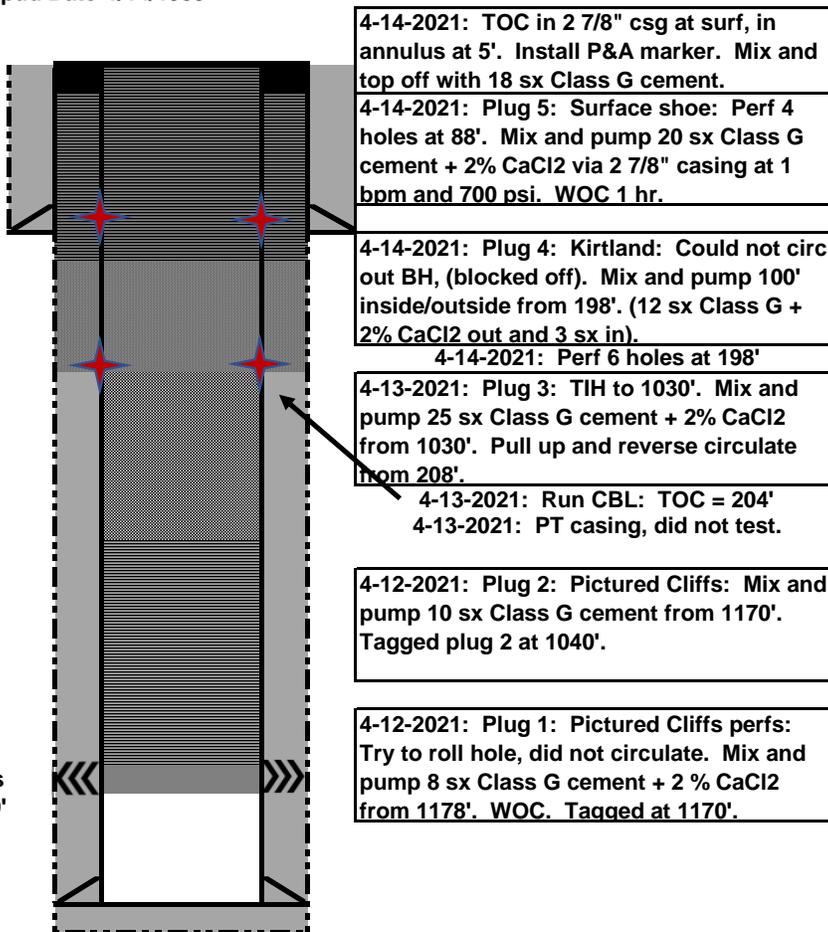

4-14-2021: TOC in 2 7/8" csg at surf, in annulus at 5'. Install P&A marker. Mix and top off with 18 sx Class G cement.

4-14-2021: Plug 5: Surface shoe: Perf 4 holes at 88'. Mix and pump 20 sx Class G cement + 2% CaCl2 via 2 7/8" casing at 1 bpm and 700 psi. WOC 1 hr.

4-14-2021: Plug 4: Kirtland: Could not circ out BH, (blocked off). Mix and pump 100' inside/outside from 198'. (12 sx Class G + 2% CaCl2 out and 3 sx in).

4-14-2021: Perf 6 holes at 198'

4-13-2021: Plug 3: TIH to 1030'. Mix and pump 25 sx Class G cement + 2% CaCl2 from 1030'. Pull up and reverse circulate from 208'.

4-13-2021: Run CBL: TOC = 204'
4-13-2021: PT casing, did not test.

4-12-2021: Plug 2: Pictured Cliffs: Mix and pump 10 sx Class G cement from 1170'. Tagged plug 2 at 1040'.

4-12-2021: Plug 1: Pictured Cliffs perms: Try to roll hole, did not circulate. Mix and pump 8 sx Class G cement + 2 % CaCl2 from 1178'. WOC. Tagged at 1170'.

All cement used was class G mixed at 15.8 ppg, yield 1.15
Regulatory representative, Gail Clayton, BLM
GPS Coordinates: Lat: 36.41798505093902, Lng: -108.08694985695183

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS
 Action 56491

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 56491
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	10/19/2021