

Submit 1 Copy To Appropriate District Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Form C-103
 Revised July 18, 2013

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-031-05184
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Dominion Production Company, LLC		6. State Oil & Gas Lease No.
3. Address of Operator 1414 W Swann Av, Suite 100, Tampa, FL 33606		Lease Name or Unit Agreement Name Hospah Sand Unit
4. Well Location Unit Letter <u>F</u> : <u>1650</u> feet from the <u>N</u> line and <u>1980</u> feet from the <u>W</u> line Section <u>1</u> Township <u>17N</u> Range <u>9W</u> NMPM County <u>McKinley</u>		8. Well Number <u>21</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 6944' GR		9. OGRID Number
10. Pool name or Wildcat Upper Hospah		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐
 CLOSED-LOOP SYSTEM ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☒
 CASING/CEMENT JOB ☐
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Dominion Production Company plugged this well in accordance with the attached report.

Spud Date:

7/23/2019

Rig Release Date:

7/31/2019

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE K Menard TITLE Manager DATE 7/27/2021

Type or print name David Burns E-mail address: db@cogllc.com PHONE: 337-534-8686

For State Use Only

APPROVED BY: Monica Kushling TITLE Deputy Oil and Gas Inspector DATE 11/10/2021

Conditions of Approval (if any):

Dominion Production

Plug And Abandonment End Of Well Report

Hospah Sand Unit 21

1650' FNL & 1980' FWL, Section 1, T17N, R9W

McKinley County, NM / API 30-031-05184

Work Summary:

- 7/23/19** R/U P&A rig. L/D rod string and rod pump. L/D tubing string. R/U wire line services. Ran CBL from TD at 1547' to surface. CBL results were sent to NMOCD office for review. CBL indicated good cement covering formations up to surface casing shoe. RIH and perforated surface casing shoe at 100'. R/D and MOL.
- 7/29/19** Made BLM, and NMOCD P&A operations notifications at 1:00 PM MST.
- 7/30/19** MOL and R/U P&A rig. Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. N/D wellhead, N/U BOP and function tested. P/U workstring and tallied on the way in the hole to a depth of 1547'. Circulated 45 bbls of crude oil out of wellbore. R/U cementing services. Once plug #1 had been pumped and were 5 bbls into displacement cement returns were at surface. Attempted to reverse out but circulated cement around through perforations at 100'. Tubing could not be moved and will be cemented in place. WOC 4 hours. RIH with sandline and tagged cement at 475' down in tubing. Shut-in well for the day. Jonathan Kelly was NMOCD inspector on location.
- 7/31/19** Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. R/U wire line services. RIH and tagged cement inside 5.5" casing at 144'. Free pointed tubing at 138'. R/U cementing services. Pumped surface plug from 144'-surface to cover surface casing shoe. N/D BOP and cut-off wellhead. Installed P&A marker per NMOCD/BLM standards. Ran weighted tally tape and tagged cement 15' down in 5.5" production casing. Ran ¾" poly pipe down

production casing and topped-off well with 50 sx of cement. Photographed the P&A marker in place and recorded its location via GPS coordinates. R/D and MOL. Jonathan Kelly was NMOCD inspector on location.

Plug Summary:

Plug #1: (Upper Hospah Sand Open Hole Interval and Formation Top, Mancos, Pt. Lookout Formation Tops, and Surface Casing Shoe 1547'-Surface, 241 Sacks Class G Cement(50 sx for top-off))

Once plug #1 had been pumped and were 5 bbls into displacement cement returns were at surface. Attempted to reverse out but circulated cement around through perforations at 100'. Tubing could not be moved and will be cemented in place. WOC 4 hours. RIH with sandline and tagged cement 475' down in tubing. R/U wire line services. RIH and tagged cement inside 5.5" casing at 144'. Free pointed tubing at 138'. R/U cementing services. Pumped surface plug from 144'-surface to cover surface casing shoe. N/D BOP and cut-off wellhead. Installed P&A marker per NMOCD/BLM standards. Ran weighted tally tape and tagged cement 15' down in 5.5" production casing. Ran 3/4" poly pipe down production casing and topped-off well with 50 sx of cement. Photographed the P&A marker in place and recorded its location via GPS coordinates. R/D and MOL.


Wellbore Diagram

Hospah Sand Unit 21
API #: 3003105184
McKinley County, New Mexico

Plug 1

1547 feet - Surface
1547 feet plug
241 sacks of Class G Cement
50 sacks for top-off

Production Casing
5.5" 17# @ 1547 ft

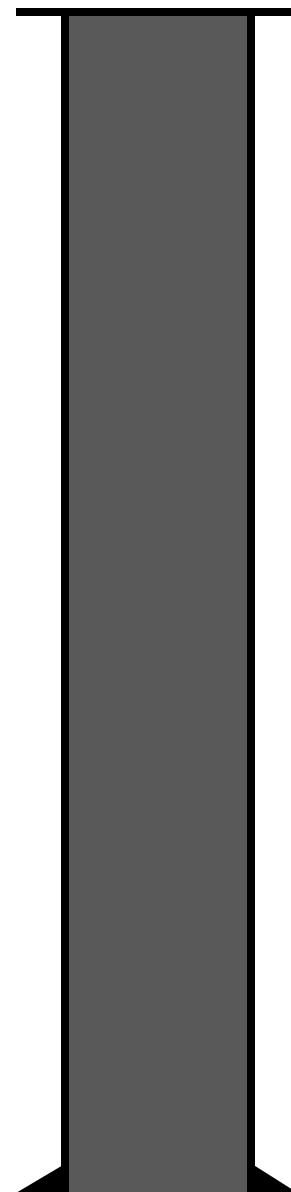

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 39971

CONDITIONS

Operator: DOMINION PRODUCTION COMPANY, LLC 1414 W Swann Avenue Tampa, FL 33606	OGRID: 291567
	Action Number: 39971
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/10/2021