

Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-26344
5. Indicate Type of Lease STATE [X] FEE [ ]
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name HNG 4F State
8. Well Number 1
9. OGRID Number 372043
10. Pool name or Wildcat TRIPLE X; BONE SPRING
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3588 GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)
1. Type of Well: Oil Well [X] Gas Well [ ] Other [ ]
2. Name of Operator TAP ROCK OPERATING, LLC
3. Address of Operator 523 PARK POINT DR, SUITE 200, GOLDEN, CO 80401
4. Well Location Unit Letter F, 1980 feet from the NORTH line and 1650 feet from the WEST line. Section 4, Township 24S, Range 33E, NMPM, County LEA.

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK [ ] PLUG AND ABANDON [ ]
TEMPORARILY ABANDON [ ] CHANGE PLANS [ ]
PULL OR ALTER CASING [ ] MULTIPLE COMPL [ ]
DOWNHOLE COMMINGLE [ ]
CLOSED-LOOP SYSTEM [ ]
OTHER: [ ]
SUBSEQUENT REPORT OF:
REMEDIAL WORK [ ] ALTERING CASING [ ]
COMMENCE DRILLING OPNS. [ ] P AND A [X]
CASING/CEMENT JOB [ ] PNR [ ]
OTHER: [ ]

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

3/2/2022 to 3/17/2022: Bleed off well head pressure. Tag and set CIBP at 10166 ft. Cement plug with 25 sks of cement to make top at 10002 ft. Place another 50 sks on top of plug, top of cement at 8955 ft. Pull tubing, perf at 6350 ft and set another packer at 6049 ft. Mix and pump 50 sks of cement for a top at 5925 ft. Perf at 5300 ft, set packer at 5000 ft and squeeze cement with 100 ft of cement. Top of cement at 5200 ft. Cut tubing at 3900 ft per Kerry at NMOCD and pump 25 sks of cement on top of tubing, top of cement at 3805 ft. Pump additional 25 sks of cement to make new top of cement at 3100 ft. Perf at 1350 ft, set packer at 880 ft and squeeze with 50 sks of cement, new top at 775 ft. Perf at 750 ft and 200 ft, circulate cement to surface through 9.625 inch and 17.5 inch casing. Rig down move out equipment, prepare location to initiate final reclamation procedures per NMOCD.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Environmental Specialist DATE 3/29/2022

Type or print name Bill Ramsey E-mail address: bramsey@taprk.com PHONE: 720-238-2787

For State Use Only

APPROVED BY: [Signature] TITLE Compliance Officer A DATE 4/26/22
Conditions of Approval (if any) 575-263-6633

**Tap Rock Production**

**HNG 4 F State #1**

S4 T24S R33E  
 Lea County, NM  
 API 30-025-26344

**Proposed Configuration**


Lat. 32.2485199, Long. -103.5804291  
 Spud Date: June 30, 1979

Surf. csg 13.375" 48. lb/ft J-55 set @ 702' to Surf  
 Cmt'd w/360 sx with Class C. TOC @ Surface  
 17.5" Hole size

Int. 9.625" set @ 5,200'  
 Cmt'd w/1,450 sx with Class C. TOC @ surf'  
 12.25" Hole size

Prod. 7" N-80 and P-110 set @ 12,710'  
 Cmt'd w/1,850 sx with Class. TOC @ 5,225'  
 8.5" Hole size

Prod. 5" N-80 and P-110 set @ 16,200'  
 Cmt'd w/340 sx with Class. TOC @ 5,225'  
 6.125" Hole size

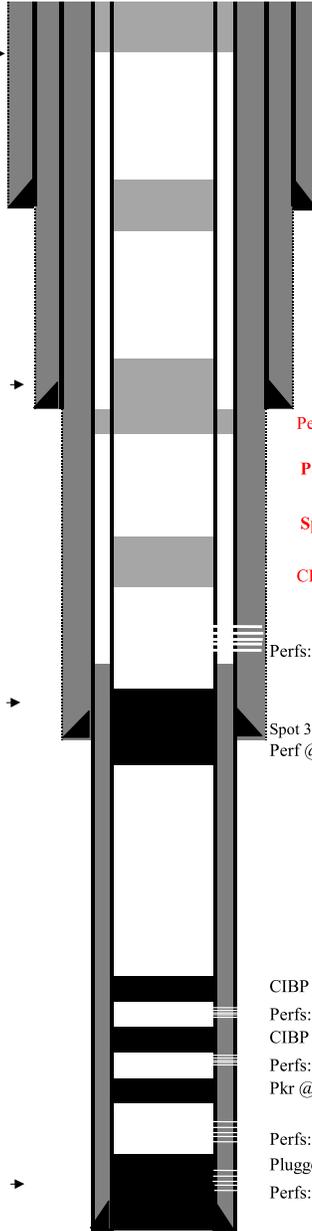

GR: 3588'

Perf @200 and circulate to cmt to surf

P&S 50 sx Class C 750 13 3/8 Casing shoe WOC & Tag  
 Set cmt plug @ 880' w/500 sx  
 100'

P&S 50 sx Class C 1350-1200 Rustler/Top of Salt WOC & Tag

Spot 25 sx Class C 3300 WOC & Tag

Perf @ 5,300' and squeeze. Set Retainer @ 5,250' w/500 sx  
 100'

P&S 50 sx Class C 6350 Cherry Canyon WOC & Tag

Spot 25 sx Class H 9100 Bone springs WOC & Tag

CIBP @ ~~XXXX~~ w/50' cmt on top Set CIBP 10,300'

Perfs: 10,396' - 10,451' - 06/17/1985 - Bone Springs Zone

Spot 30sx across liner top 12,170' - 12,370'  
 Perf @ 12,760' and squeeze. Set Retainer @ 12,740' w/50' cmt on top - 06/17/1985

CIBP @ 13,100' w/35' cmt on top - 06/17/1985

Perfs: 13,250' - 13,337' - 4/16/1985 - Wolfcamp Zone

CIBP @ 14,900' w/35' cmt on top - 12/19/1979

Perfs: 14,922' - 14,932' - 12/21/1979 - Atoka Zone

Pkr @15,486' w/21' cmt on top - 12/19/1979

Perfs: 15,594' - 15,663' - 12/6/1979 - Plugged

Plugged 15,808' 15,796' - 11/2/1979

Perfs: 15,878' - 15,911' Wolfcamp - Plugged

PBTD 12,170'  
 TD 16,200'  
 Not to Scale

Wellbore Sketch by: Rakesh Patel 5/26/2021

**Tap Rock Production**

**Proposed Configuration**

**HNG 4 F State #1**

S4 T24S R33E  
 Lea County, NM  
 API 30-025-26344


Lat. 32.2485199, Long. -103.5804291  
 Spud Date: June 30, 1979

Surf. csg 13.375" 48. lb/ft J-55 set @ 702' to Surf  
 Cmt'd w/360 sx with Class C. TOC @ Surface  
 17.5" Hole size

Int. 9.625" set @ 5,200'  
 Cmt'd w/1,450 sx with Class C. TOC @ surf'  
 12.25" Hole size

Prod. 7" N-80 and P-110 set @ 12,710'  
 Cmt'd w/1,850 sx with Class. TOC @ 5,225'  
 8.5" Hole size

Prod. 5" N-80 and P-110 set @ 16,200'  
 Cmt'd w/340 sx with Class. TOC @ 5,225'  
 6.125" Hole size

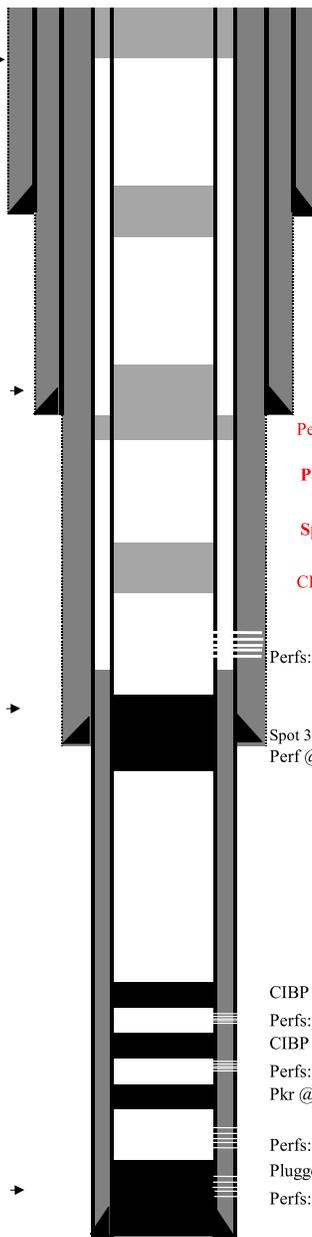

GR: 3588'

Perf @200 and circulate to cmt to surf

P&S 50 sx Class C 750 13 3/8 Casing shoe WOC & Tag

Set cmt plug @ 880' w/500 sx  
 100'

P&S 50 sx Class C 1350-1200 Rustler/Top of Salt WOC & Tag

Spot 25 sx Class C 3300 WOC & Tag

Perf @ 5,300' and squeeze. Set Retainer @ 5,250' w/500 sx  
 100'

P&S 50 sx Class C 6350 Cherry Canyon WOC & Tag

Spot 25 sx Class H 9100 Bone springs WOC & Tag

CIBP @ ~~XXXX~~ w/50' cmt on top Set CIBP 10,300'

Perfs: 10,396' - 10,451' - 06/17/1985 - Bone Springs Zone

Spot 30sx across liner top 12,170' - 12,370'  
 Perf @ 12,760' and squeeze. Set Retainer @ 12,740' w/50' cmt on top - 06/17/1985

CIBP @ 13,100' w/35' cmt on top - 06/17/1985

Perfs: 13,250' - 13,337' - 4/16/1985 - Wolfcamp Zone

CIBP @ 14,900' w/35' cmt on top - 12/19/1979

Perfs: 14,922' - 14,932' - 12/21/1979 - Atoka Zone

Pkr @15,486' w/21' cmt on top - 12/19/1979

Perfs: 15,594' - 15,663' - 12/6/1979 - Plugged

Plugged 15,808' 15,796' - 11/2/1979

Perfs: 15,878' - 15,911' Wolfcamp - Plugged

PBTD 12,170'  
 TD 16,200'  
 Not to Scale

Wellbore Sketch by: Rakesh Patel 5/26/2021

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

COMMENTS

Action 94094

**COMMENTS**

Operator: TAP ROCK OPERATING, LLC 523 Park Point Drive Golden, CO 80401	OGRID: 372043
	Action Number: 94094
	Action Type: [C-103] Sub. Plugging (C-103P)

**COMMENTS**

Created By	Comment	Comment Date
plmartinez	DATA ENTRY PM	4/29/2022

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
 Action 94094

**CONDITIONS**

Operator: TAP ROCK OPERATING, LLC 523 Park Point Drive Golden, CO 80401	OGRID: 372043
	Action Number: 94094
	Action Type: [C-103] Sub. Plugging (C-103P)

**CONDITIONS**

Created By	Condition	Condition Date
kfortner	C103Q and Marker pic required for release	4/26/2022