

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

OFFICIAL FILE COPY

04/14/2022

Well Name: MANN 3 FEDERAL	Well Location: T18S / R27E / SEC 3 / NWSW /	County or Parish/State: EDDY / NM
Well Number: 1	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC061783B	Unit or CA Name:	Unit or CA Number:
US Well Number: 300153041000X1	Well Status: Abandoned	Operator: REDWOOD OPERATING LLC

Accepted for record – NMOCD gc 5/2/2022

Subsequent Report

OPERATOR'S COPY

Sundry ID: 2666865

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 04/13/2022

Time Sundry Submitted: 01:31

Date Operation Actually Began: 03/31/2022

Actual Procedure: 03/31/22 MIRU plugging equipment. POH w/ rods & pump. ND well head, NU BOP. POH w/ tbq. 04/01/22 RIH w/ guage ring to 3200'. Set CIBP @ 3035'. Dump bailed 2 runs. WOC. Tagged plug @ 3023'. 04/04/22 RU Rotary Wireline, set 5 1/2" CIBP @ 2965'. Dump bailed 2 runs. RD Rotary Wireline & WOC. Tagged plug @ 2953'. pressure tested csg, held 500 PSI. RIH w/ 5 1/2 CIBP, dropped ball, gravity in 10 bbls, & pressured up to 1800 PSI. Set 5 1/2" CIBP @ 2030'. Circ'd hole w/ 45 bbls MLF. Pressure tested csg, held 500 PSI. Spotted 25 sx class C cmt @ 2030-1783'. WOC. 04/05/22 Tagged plug @ 1774'. Spotted 35 sx class C cmt w/ 2% CACL 1365-1019'. WOC. Tagged plug @ 894'. Spotted 25 sx class C cmt @ 894-647'. ND BOP. Spotted 25 sx class C cmt @ 200' & circulated to surface. 04/06/22 Riggged down & moved off. 04/07/22 Moved in backhoe and welder. Cut off well head & anchors. Roberta Thompson w/ BLM verified cmt @ surface via picture text message. Welded on "Above Ground Dry Hole Marker". Backfilled cellar, cut off deadmen, cleaned location, and moved off.

SR Attachments

Actual Procedure

Mann_3_Fed_1__Current_20220413133038.pdf

Mann_3_Fed_1__Plugged_20220413133038.pdf

Mann_3_Fed_1__BLM_20220413133038.pdf

Reclamation Due 10-7-22

RECEIVED

APR 21 2022

MAILROOM

Well Name: NMLC061783B
Well Location: T18S / R27E / SEC 3 /
NWSW /County or Parish/State: EDDY /
NM

Well Number: 1

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC061783B

Unit or CA Name:

Unit or CA Number:

US Well Number: 300153041000X1

Well Status: Abandoned

Operator: REDWOOD
OPERATING LLC**Operator Certification**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: DELILAH FLORES

Signed on: APR 13, 2022 01:31 PM

Name: REDWOOD OPERATING LLC

Title: Regulatory Technician 1

Street Address: 11344 LOVINGTON HWY

City: ARTESIA

State: NM

Phone: (575) 748-1288

Email address: DELILAH@MEC.COM

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: JAMES A AMOS

BLM POC Title: Acting Assistant Field Manager

BLM POC Phone: 5752345927

BLM POC Email Address: jamos@blm.gov

Disposition: Accepted

Disposition Date: 04/14/2022

Signature: James A. Amos

Plug Abandonment
Subsequent Report


OPERATOR NAME:	Redwood Operating, LLC
LEASE NO.:	NMLC061783B
WELL NAME & NO.:	Mann 3 Federal #1
US WELL NUMBER:	30-015-30410-00-S2
LOCATION:	T18S/ R27E/ Sec 3/ NWSW
COUNTY:	Eddy County, NM

03/31/22 MIRU plugging equipment. POH w/ rods & pump. ND well head, NU BOP. POH w/ tbg. 04/01/22 RIH w/ guage ring to 3200'. Set CIBP @ 3035'. Dump bailed 2 runs. WOC. Tagged plug @ 3023'. 04/04/22 RU Rotary Wireline, set 5 1/2" CIBP @ 2965'. Dump bailed 2 runs. RD Rotary Wireline & WOC. Tagged plug @ 2953'. pressure tested csg, held 500 PSI. RIH w/ 5 1/2 CIBP, dropped ball, gravity in 10 bbls, & pressured up to 1800 PSI. Set 5 /2" CIBP @ 2030'. Circ'd hole w/ 45 bbls MLF. Pressure tested csg, held 500 PSI, Spotted 25 sx class C cmt @ 2030-1783'. WOC. 04/05/22 Tagged plug @ 1774'. Spotted 35 sx class C cmt w/ 2% CACL 1365-1019'. WOC. Tagged plug @ 894'. Spotted 25 sx class C cmt @ 894-647'. ND BOP. Spotted 25 sx class C cmt @ 200' & circulated to surface. 04/06/22 Rigged down & moved off. 04/07/22 Moved in backhoe and welder. Cut off well head & anchors. Roberta Thompson w/ BLM verified cmt @ surface via picture text message. Welded on "Above Ground Dry Hole Marker". Backfilled cellar, cut off deadmen, cleaned location, and moved off.

Redwood Operating		PLUGGED	
Author:	Abby @ BCM	Well No.	#1
Well Name	Mann 3 Federal	API #:	30-015-30410
Field/Pool	Red Lake (Q-GB-SA)	Location:	Sec 3, T18S, R27E
County	Eddy		2178' FSL & 330' FWL
State	New Mexico	GL:	3579
Spud Date	5/21/2001		

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	J55	24#	1,315	12 1/4	615	0
Prod Csg	5 1/2	J55	15.5#	3,625	7 7/8	695	0

Formation	Top
7 Rvs	368
Bowers	695
Queen	885
GRBG	1325
San Andres	1556
Glorieta	2967
Yeso	3065

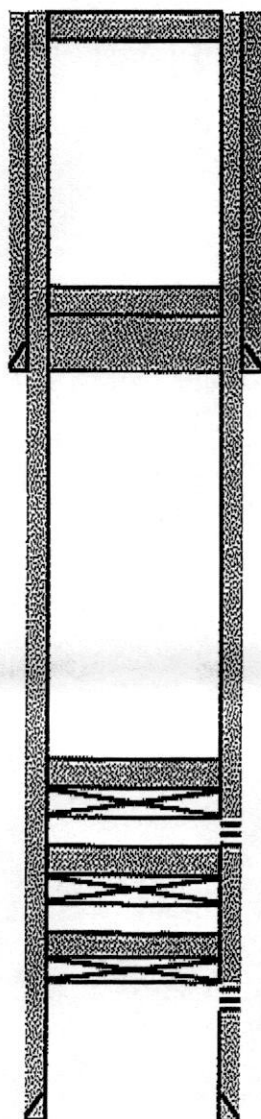

6. Spotted 25 sx class C cmt @ 200' & circulated to surface.

8 5/8 24# CSG @ 1,315
Hole Size: 12 1/4

5. Spotted 25 sx class C cmt @ 894-647'.

4. Spotted 35 sx class C cmt w/ 2% CACL 1365-1019'. WOC. Tagged plug @ 894'.

3. Set 5 /2" CIBP @ 2030'. Circ'd hole w/ 45 bbls MLF. Pressure tested csg, held 500 PSI. Spotted 25 sx class C cmt @ 2030-1783'. WOC & Tagged plug @ 1774'.
Perfs @ 2080-3035

2. Set 5 1/2" CIBP @ 2965'. Dump bailed 2 runs. RD Rotary Wireline & WOC. Tagged plug @ 2953'.

1. Set CIBP @ 3035'. Dump bailed 2 runs. WOC. Tagged plug @ 3023'.
Perfs @ 3120-3376


5 1/2 15.5# CSG @ 3,625
Hole Size: 7 7/8

TDPB @ 3577
TD @ 3630

Redwood Operating		PLUGGED	
Author:	Abby @ BCM	Well No.	#1
Well Name	Mann 3 Federal	API #:	30-015-30410
Field/Pool	Red Lake (Q-GB-SA)	Location:	Sec 3, T18S, R27E
County	Eddy		2178' FSL & 330' FWL
State	New Mexico	GL:	3579
Spud Date	5/21/2001		

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	J55	24#	1,315	12 1/4	615	0
Prod Csg	5 1/2	J55	15.5#	3,625	7 7/8	695	0

Formation	Top
7 Rvs	368
Bowers	695
Queen	885
GRBG	1325
San Andres	1556
Glorieta	2967
Yeso	3065

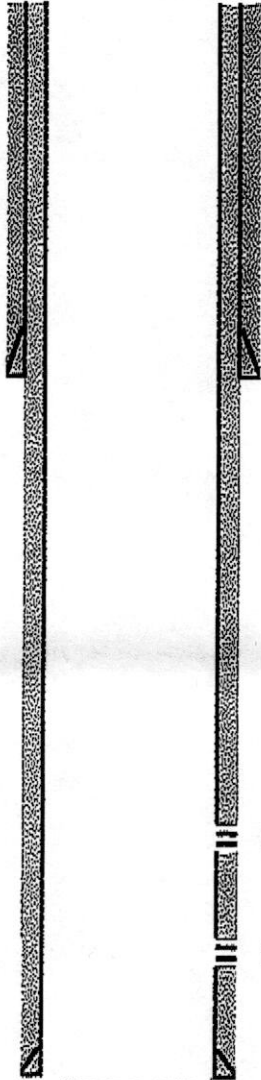

8 5/8 24# CSG @ 1,315
Hole Size: 12 1/4

Perfs @ 2080-3035

Perfs @ 3120-3376

5 1/2 15.5# CSG @ 3,625
Hole Size: 7 7/8

TDPB @ 3577
TD @ 3630

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 102759

CONDITIONS

Operator: Redwood Operating LLC PO Box 1370 Artesia, NM 88210	OGRID: 330211
	Action Number: 102759
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	5/2/2022