

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104

Revised August 1, 2011

District II

811 S. First St., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division

1220 South St. Francis Dr.

Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 10/24/2022
⁴ API Number 30 - 015-49683	⁵ Pool Name PURPLE SAGE WOLFCAMP *NSL-8388	⁶ Pool Code 98220
⁷ Property Code: 328290	⁸ Property Name: HEADS CC 9-4 FEDERAL COM	⁹ Well Number: 36H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
B	16	24S	29E		964	NORTH	1636	EAST	EDDY

¹¹ Bottom Hole Location

FTP- 341' FSL 519' FEL LTP- 187' FNL 588' FEL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L1	4	24S	29E		44	NORTH	592	EAST	EDDY
¹² Lse Code F	¹³ Producing Method Code : P		¹⁴ Gas Connection Date: 10/26/22		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 07/04/22	²² Ready Date 10/24/2022	²³ TD 20802'M 10057'V	²⁴ PBTD 20754'M 10057'V	²⁵ Perforations 10576-20659'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
17-1/2"		13-3/8"		550'	1656
12-1/4"		9-5/8"		9534'	3247
8-3/4" X 8-1/2"		7" X 5-1/2"		20782'	2032
		2-7/8" TBG		9596'	NA

V. Well Test Data

³¹ Date New Oil 10/27/22	³² Gas Delivery Date 10/26/22	³³ Test Date 12/9/22	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 570
³⁷ Choke Size 128/128	³⁸ Oil 4055	³⁹ Water 7064	⁴⁰ Gas 4497		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.com

Date: 02/08/2023 Phone: 432-685-5936

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title: PETROLEUM SPECIALIST

Approval Date: 5/25/2023

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (505) 748-1283 Fax: (505) 334-6170
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☒ AMENDED REPORT



WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-49683	² Pool Code 98220	³ Pool Name PURPLE SAGE WOLFCAMP
⁴ Property Code 328290	Property Name HEADS CC 9_4 FEDERAL COM	⁶ Well Number 36H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁹ Elevation 2927'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	16	24S	29E		964	NORTH	1636	EAST	EDDY
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L 1	4	24S	29E		44	NORTH	592	EAST	EDDY
¹² Dedicated Acres 1278.94	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. NSL-8388						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 650273.76' / Y: 453889.39' B - X: 650284.73' / Y: 451033.82' C - X: 650298.13' / Y: 448381.95' D - X: 650312.09' / Y: 445726.24' E - X: 647666.69' / Y: 445712.79' F - X: 645021.30' / Y: 445699.33' G - X: 645008.87' / Y: 448351.90' H - X: 644997.51' / Y: 451006.93' I - X: 644983.67' / Y: 453660.96' J - X: 644969.85' / Y: 456311.03' K - X: 647616.35' / Y: 456321.38' L - X: 650262.85' / Y: 456331.74'		CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 609090.10' / Y: 453630.27' B - X: 609101.00' / Y: 450974.76' C - X: 609114.33' / Y: 448322.94' D - X: 609128.23' / Y: 445667.29' E - X: 606482.84' / Y: 445653.83' F - X: 603837.48' / Y: 445640.37' G - X: 603825.09' / Y: 448292.89' H - X: 603813.80' / Y: 450947.88' I - X: 603800.02' / Y: 453601.84' J - X: 603786.27' / Y: 456251.85' K - X: 606432.77' / Y: 456262.21' L - X: 609079.26' / Y: 456272.56'		17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered with this division. Signature:  Date: 10/23/22 Printed Name: JANA MENDIOLA E-mail Address: janalyn_mendiola@oxy.com	
BOTTOM HOLE LOCATION 44' FNL 592' FEL, SECTION 4 20802' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 649671.34' / Y: 456285.42' LAT: 32.25391790N / LON: 103.98288760W NAD 27, SPCS NM EAST X: 608487.75' / Y: 456226.25' LAT: 32.25379549N / LON: 103.98239773W					
LAST TAKE POINT 187' FNL 588' FEL, SECTION 4 20659' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 649675.86' / Y: 456142.53' LAT: 32.25352508N / LON: 103.98287447W NAD 27, SPCS NM EAST X: 608492.27' / Y: 456083.36' LAT: 32.25340267N / LON: 103.98238462W					
FIRST TAKE POINT 341' FSL 519' FEL, SECTION 9 10576' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 649791.00' / Y: 446064.26' LAT: 32.22582041N / LON: 103.98260849W NAD 27, SPCS NM EAST X: 608607.15' / Y: 446005.30' LAT: 32.22569768N / LON: 103.98211963W					
KICK OFF POINT 217' FSL 625' FEL, SECTION 9 9574' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 649685.99' / Y: 445940.00' LAT: 32.22547977N / LON: 103.98294939W NAD 27, SPCS NM EAST X: 608502.13' / Y: 445881.04' LAT: 32.22535704N / LON: 103.98246054W					
SURFACE HOLE LOCATION 964' FNL 1636' FEL, SECTION 16 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 648682.60' / Y: 444752.70' LAT: 32.22222501N / LON: 103.98620656W NAD 27, SPCS NM EAST X: 607499.72' / Y: 444693.76' LAT: 32.22210225N / LON: 103.98571773W		18 SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. OCTOBER 20, 2022 Date of Survey Signature and Seal of Professional Surveyor:  Certificate Number: DAVID W. MYERS 11403			

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99982819 Convergence Angle: 00°26'57.22001"



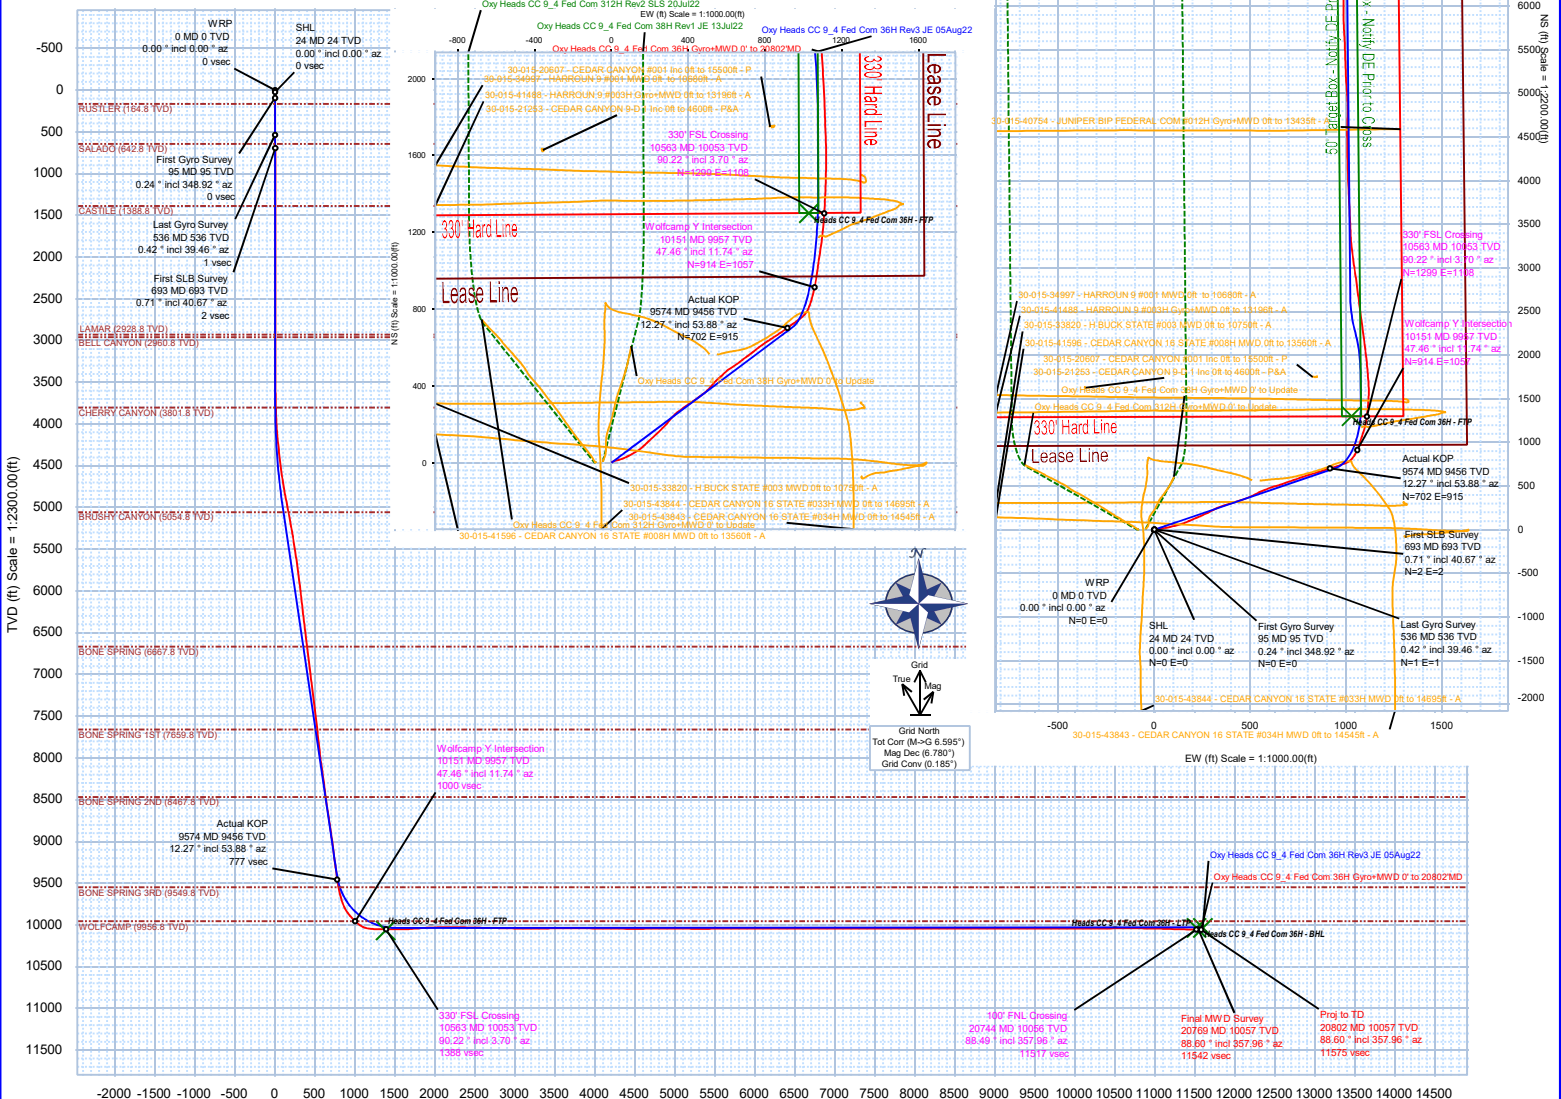
OXY



Borehole:	Well:	Field:	Structure:
Heads CC 9_4 Fed Com 36H	Heads CC 9_4 Fed Com 36H	NM Eddy County (NAD 83)	Oxy Heads CC 9_4 Federal Com Pad (Citadel 2)

Gravity & Magnetic Parameters	Surface Location	NAD83 New Mexico State Plane, Eastern Zone, US Feet	Miscellaneous
Model: IFR1 MagDec: 6.78° Dip: 59.935° Date: 16-Aug-2022 FS: 47566.7nT Gravity FS: 998.471mgn (9.80665 Based)	Lat: N 32 13 20.01 Lon: W 103 59 10.34	Northing: 444752.7HUS Easting: 648682.6HUS Grid Conv: 0.1851° Scale Fact: 0.99992229	Slot: Heads CC 9_4 Fed Com 36H Plan: Oxy Heads CC 9_4 Fed Com 36H Gyro/MWD 0' to 20802MD TVD Ref: RKB(2950.8ft above MSL)

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)S(-)	E(+)W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	
First Gyro Survey	94.61	0.24	348.92	94.61	0.14	0.15	-0.03	0.34
Last Gyro Survey	535.96	0.42	39.46	535.96	1.07	1.02	0.66	0.15
First SLB Survey	693.00	0.71	40.67	692.99	2.33	2.20	1.66	0.18
Actual KOP	9574.00	12.27	53.88	9456.22	776.90	702.03	915.21	5.51
Wolfcamp Y Intersection	10150.54	47.46	11.74	9956.80	1000.45	914.32	1057.49	6.98
330' FSL Crossing	10563.00	90.22	3.70	10052.56	1387.58	1298.58	1107.58	1.47
100' FNL Crossing	20744.00	88.49	357.96	10056.03	11517.46	11474.77	990.81	1.21
Final MWD Survey	20769.00	88.60	357.96	10056.68	11542.27	11499.75	989.91	0.78
Proj to TD	20802.00	88.60	357.96	10057.49	11575.02	11532.72	988.74	0.00



Schlumberger

Oxy Heads CC 9_4 Fed Com 36H Gyro+MWD 0' to 20802' MD Survey Geodetic Report (Def Survey)



Report Date: August 28, 2022 - 06:37 PM
Client: OXY
Field: NM Eddy County (NAD 83)
Structure / Slot: Oxy Heads CC 9_4 Federal Com Pad (Citadel 2) / Heads CC 9_4 Fed Com 36H
Well: Heads CC 9_4 Fed Com 36H
Borehole: Heads CC 9_4 Fed Com 36H
UWI / API#: Unknown / Unknown
Survey Name: Oxy Heads CC 9_4 Fed Com 36H Gyro+MWD 0' to 20802' MD
Survey Date: June 16, 2022
Tort / AHD / DDI / ERD Ratio: 226.786' / 12062.669 ft / 6.753 / 1.199
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 13' 20.01004", W 103° 59' 10.34362"
Location Grid N/E Y/X: N 444752.700 RUS, E 648682.600 RUS
CRS Grid Convergence Angle: 0.1851 °
Grid Scale Factor: 0.99992229
Version / Patch: 2.10.829.1

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 4.850 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 2950.800 ft above MSL
Seabed / Ground Elevation: 2926.800 ft above MSL
Magnetic Declination: 6.780 °
Total Gravity Field Strength: 998.4710mgn (9.80665 Based)
Gravity Model: GAR1M
Total Magnetic Field Strength: 47566.700 nT
Magnetic Dip Angle: 59.935 °
Declination Date: August 16, 2022
Magnetic Declination Model: IFR1
North Reference: Grid North
Grid Convergence Used: 0.1800 °
Total Corr Mag North->Grid North: 6.6000 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S ° ° °)	Longitude (E/W ° ° °)
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	444752.70	648682.60	N 32 13 20.01	W 103 59 10.34
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00	0.00	0.00	444752.70	648682.60	N 32 13 20.01	W 103 59 10.34
First Gyro Survey	94.61	0.24	348.92	94.61	0.14	0.15	-0.03	0.34	0.15	348.92	444752.85	648682.57	N 32 13 20.01	W 103 59 10.34
	180.69	0.04	282.65	180.69	0.32	0.33	-0.09	0.26	0.34	344.30	444753.03	648682.51	N 32 13 20.01	W 103 59 10.34
	269.11	0.11	64.45	269.11	0.37	0.37	-0.05	0.16	0.37	352.96	444753.07	648682.55	N 32 13 20.01	W 103 59 10.34
	363.07	0.09	71.26	363.07	0.44	0.43	0.11	0.02	0.45	13.62	444753.13	648682.71	N 32 13 20.01	W 103 59 10.34
	457.74	0.30	41.77	457.74	0.67	0.64	0.34	0.24	0.73	27.91	444753.34	648682.94	N 32 13 20.02	W 103 59 10.34
Last Gyro Survey	535.96	0.42	39.46	535.96	1.07	1.02	0.66	0.15	1.21	32.95	444753.72	648683.26	N 32 13 20.02	W 103 59 10.34
First SLB Survey	693.00	0.71	40.67	692.99	1.86	1.23	2.20	0.18	2.76	37.03	444754.90	648684.26	N 32 13 20.03	W 103 59 10.32
	741.00	0.66	35.23	740.99	2.81	2.65	2.01	0.17	3.33	37.20	444755.35	648684.61	N 32 13 20.04	W 103 59 10.32
	782.00	0.35	1.25	781.98	3.14	2.97	2.15	1.02	3.67	35.93	444755.67	648684.75	N 32 13 20.04	W 103 59 10.32
	866.00	0.23	110.68	865.98	3.35	3.17	2.31	0.57	3.92	36.17	444755.87	648684.91	N 32 13 20.04	W 103 59 10.32
	959.00	0.40	246.95	958.98	3.15	2.97	2.19	0.63	3.69	36.39	444755.67	648684.79	N 32 13 20.04	W 103 59 10.32
	1054.00	0.15	84.48	1053.98	3.01	2.86	2.01	0.57	3.49	35.14	444755.56	648684.61	N 32 13 20.04	W 103 59 10.32
	1241.00	0.24	71.99	1240.98	3.21	3.00	2.63	0.05	3.99	41.19	444755.70	648685.23	N 32 13 20.04	W 103 59 10.31
	1335.00	0.26	63.27	1334.98	3.40	3.16	3.00	0.05	4.36	43.57	444755.86	648685.60	N 32 13 20.04	W 103 59 10.31
	1428.00	0.21	12.56	1427.98	3.68	3.42	3.23	0.22	4.70	43.37	444756.12	648685.83	N 32 13 20.04	W 103 59 10.31
	1522.00	0.11	26.43	1521.98	3.93	3.67	3.31	0.11	4.94	42.04	444756.37	648685.91	N 32 13 20.05	W 103 59 10.30
	1616.00	0.02	354.13	1615.98	4.03	3.76	3.34	0.10	5.04	41.63	444756.46	648685.94	N 32 13 20.05	W 103 59 10.30
	1710.00	0.06	267.01	1709.98	4.04	3.78	3.29	0.07	5.01	41.09	444756.48	648685.89	N 32 13 20.05	W 103 59 10.31
	1804.00	0.02	240.29	1803.98	4.03	3.77	3.23	0.05	4.96	40.62	444756.47	648685.83	N 32 13 20.05	W 103 59 10.31
	1898.00	0.09	40.05	1897.98	4.08	3.82	3.26	0.12	5.02	40.55	444756.52	648685.86	N 32 13 20.05	W 103 59 10.31
	1991.00	0.17	37.30	1990.98	4.25	3.98	3.39	0.09	5.23	40.45	444756.68	648685.99	N 32 13 20.05	W 103 59 10.30
	2085.00	0.17	40.39	2084.98	4.49	4.20	3.57	0.07	5.51	40.37	444756.90	648686.17	N 32 13 20.05	W 103 59 10.30
	2179.00	0.34	60.31	2178.98	4.76	4.44	3.90	0.20	5.91	41.29	444757.14	648686.50	N 32 13 20.05	W 103 59 10.30
	2273.00	0.23	21.87	2272.98	5.10	4.76	4.21	0.23	6.35	41.55	444757.46	648686.81	N 32 13 20.06	W 103 59 10.29
	2367.00	0.31	318.86	2366.98	5.45	5.12	4.12	0.31	6.57	38.79	444757.82	648686.72	N 32 13 20.06	W 103 59 10.30
	2461.00	0.37	174.45	2460.98	5.33	5.01	3.98	0.69	6.40	38.45	444757.71	648686.58	N 32 13 20.06	W 103 59 10.30
	2555.00	0.24	15.76	2554.97	5.23	4.90	4.06	0.64	6.36	39.67	444757.60	648686.66	N 32 13 20.06	W 103 59 10.30
	2650.00	0.04	298.70	2649.97	5.43	5.11	4.09	0.25	6.54	38.67	444757.81	648686.69	N 32 13 20.06	W 103 59 10.30
	2745.00	0.17	170.35	2744.97	5.31	4.98	4.08	0.21	6.44	39.32	444757.68	648686.68	N 32 13 20.06	W 103 59 10.30
	2839.00	0.09	259.42	2838.97	5.16	4.83	4.03	0.20	6.29	39.84	444757.53	648686.63	N 32 13 20.06	W 103 59 10.30
	2933.00	0.13	267.51	2932.97	5.12	4.81	3.85	0.05	6.17	38.68	444757.51	648686.45	N 32 13 20.06	W 103 59 10.30
	3027.00	0.13	300.87	3026.97	5.08	4.79	3.64	0.02	6.02	37.23	444757.49	648686.24	N 32 13 20.06	W 103 59 10.30
	3121.00	0.34	209.16	3120.97	4.80	4.53	3.40	0.50	5.67	36.88	444757.23	648686.00	N 32 13 20.05	W 103 59 10.30
	3214.00	0.24	326.58	3213.97	4.71	4.45	3.16	0.54	5.46	35.35	444757.15	648685.76	N 32 13 20.05	W 103 59 10.31
	3309.00	0.32	239.59	3308.97	4.71	4.49	2.82	0.41	5.30	32.16	444757.19	648685.42	N 32 13 20.05	W 103 59 10.31
	3497.00	0.42	32.60	3496.97	5.02	4.80	2.74	0.38	5.53	29.71	444757.50	648685.34	N 32 13 20.06	W 103 59 10.31
	3696.00	1.59	67.93	3695.95	5.91	5.58	4.13	1.35	6.94	36.52	444758.28	648686.73	N 32 13 20.07	W 103 59 10.30
	3685.00	3.28	74.75	3684.87	7.43	6.78	7.94	1.82	10.44	49.50	444759.48	648690.54	N 32 13 20.08	W 103 59 10.25
	3780.00	4.61	74.50	3779.64	9.69	8.69	14.24	1.60	16.59	59.12	444761.21	648700.15	N 32 13 20.09	W 103 59 10.18
	3969.00	7.76	75.22	3967.52	16.62	13.80	33.90	1.67	36.60	67.85	444766.50	648716.50	N 32 13 20.15	W 103 59 9.95
	4063.00	9.76	70.63	4060.42	22.02	18.06	47.55	2.07	50.87	69.20	444770.76	648730.15	N 32 13 20.19	W 103 59 9.79
	4157.00	11.66	68.17	4152.77	29.55	24.24	63.89	2.08	68.33	69.23	444776.94	648746.48	N 32 13 20.25	W 103 59 9.60
	4252.00	12.44	62.91	4245.68	39.28	32.47	81.91	1.42	88.11	68.38	444785.16	648764.50	N 32 13 20.33	W 103 59 9.39
	4346.00	12.13	62.49	4337.53	49.92	41.64	99.68	0.34	108.03	67.33	444794.34	648782.28	N 32 13 20.42	W 103 59 9.18
	4441.00	12.38	60.51	4430.91	60.91	51.77	126.40	0.44	127.94	64.78	444803.89	648799.85	N 32 13 20.51	W 103 59 8.98
	4535.00	12.32	56.47	4522.26	72.73	61.60	134.25	0.92	147.71	65.35	444814.30	648816.84	N 32 13 20.62	W 103 59 8.78
	4629.00	12.27	52.09	4614.11	85.74	73.28	150.49	0.99	167.39	64.04	444825.98	648833.08	N 32 13 20.73	W 103 59 8.59
	4723.00	12.41	47.25	4705.94	99.98	86.27	165.79	1.11	186.90	62.51	444838.97	648848.38	N 32 13 20.86	W 103 59 8.41
	4817.00	14.31	46.45	4797.39	116.13	111.14	181.63	2.03	207.89	60.89	444853.83	648864.21	N 32 13 21.00	W 103 59 8.23
	4910.00	15.12	47.21	4887.34	133.69	117.29	198.86	0.90	230.88	59.47	444869.99	648881.44	N 32 13 21.16	W 103 59 8.02
	5006.00	17.12	48.12	4980.03	152.18	134.30	217.20	0.56	255.37	56.32	444886.99	648900.72	N 32 13 21.33	W 103 59 7.73
	5100.00	15.07	46.35	5070.79	170.38	151.05	235.00	0.21	279.36	57.27	444903.74	648917.58	N 32 13 21.50	W 103 59 7.60
	5194.00	15.00	45.94	5161.57	188.70	167.95	252.59	0.14	303.32	56.38	444920.63	648935.17	N 32 13 21.66	W 103 59 7.40
	5288.00	13.34	44.12	5252.71	206.27	184.19	268.88	1.83	325.92	55.59	444936.88	648951.46	N 32 13 21.82	W 103 59 7.21
	5382.00	12.35	43.59	5344.36	222.50	199.26	283.36	1.06	346.40	54.88	444951.94	648965.94	N 32 13 21.97	W 103 59 7.04
	5476.00	10.89	40.20	5436.43	237.59	213.32	296.02	1.71	364.88	54.22	444966.01	648978.60	N 32 13 22.11	W 103 59 6.89
	5570.00	10.11	39.93	5522.11	228.99	226.92	307.51	1.14	382.22	53.07	444979.67	648990.09	N 32 13 22.25	W 103 59 6.70
	5664.00	10.90	41.87	5621.00	266.52	240.49	319.21	0.41	399.66	53.01	444993.17	649007.38	N 32 13 22.38	W 103 59 6.52
	5758.00	11.06	46.42	5713.29	280.46	253.32	331.67	0.94	417.35	52.63	445006.00	649014.24	N 32 13 22.51	W 103 59 6.47
	5851.00	10.84	51.96	5804.59	293.08	264.86	345.02	1.16	434.96	52.49	445017.54	649027.59	N 32 13 22.62	W 103 59 6.32
	5946.00	11.13	55.31	5897.85	305.00	275.59	359.60	0.74	453.05	52.53	445028.26	649042.17	N 32 13 22.73	W 103 59 6.15
	6040.00	11.05	55.47	5990.10	316.49	285.86	374.48	0.09	471.11	52.64	445038.53	649057.05	N 32 13 22.83	W 103 5

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (ft/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ft)	Easting (ft)	Latitude (N ° ' ")	Longitude (E/W ° ' ")
Actual KOP	9574.00	12.27	53.88	9456.22	776.90	702.03	915.21	5.51	1153.45	52.51	445454.68	649597.73	N 32 13 28.03	W 103 58 58.96
	9667.00	17.39	54.30	9546.09	792.42	715.97	934.49	5.51	1177.24	52.54	445468.62	649617.01	N 32 13 26.93	W 103 58 59.44
	9762.00	22.02	53.61	9635.50	813.40	734.84	960.36	4.88	1209.25	52.58	445487.48	649642.89	N 32 13 27.25	W 103 58 59.14
	9804.00	23.94	53.92	9674.17	824.17	744.53	973.59	4.58	1225.64	52.59	445497.17	649656.11	N 32 13 27.35	W 103 58 58.98
	9889.00	26.53	46.69	9751.07	849.63	767.71	1001.35	4.73	1261.78	52.52	445520.35	649683.87	N 32 13 27.57	W 103 58 58.66
	9982.00	35.13	22.33	9831.16	890.86	806.94	1026.78	16.14	1305.92	51.84	445559.57	649709.30	N 32 13 27.96	W 103 58 58.36
	10075.00	42.74	15.04	9903.49	947.55	862.27	1045.17	9.54	1354.95	50.48	445594.91	649727.69	N 32 13 28.51	W 103 58 58.14
	10150.54	47.46	11.74	9956.80	1000.45	914.32	1057.49	6.98	1397.95	49.15	445666.95	649740.01	N 32 13 29.00	W 103 58 58.00
	10153.00	47.62	11.64	9958.46	1002.25	916.09	1057.86	6.98	1399.39	49.11	445668.72	649740.38	N 32 13 29.04	W 103 58 57.99
	10167.00	48.95	11.35	9967.77	1012.63	926.33	1059.94	9.62	1407.68	48.85	445678.96	649742.46	N 32 13 29.14	W 103 58 57.97
Wolfcamp Y Intersection	10262.00	63.64	7.29	10020.36	1091.20	1004.12	1072.47	15.86	1469.16	46.89	445756.74	649754.98	N 32 13 29.91	W 103 58 57.82
	10356.00	84.53	9.01	10046.00	1180.94	1093.10	1085.28	22.29	1540.35	44.79	445845.71	649767.99	N 32 13 30.79	W 103 58 57.67
	10451.00	88.36	6.84	10051.89	1275.60	1186.98	1098.35	4.63	1617.19	42.78	445939.59	649780.86	N 32 13 31.72	W 103 58 57.51
	10490.00	89.74	4.66	10052.53	1314.58	1225.78	1102.25	6.11	1648.48	41.96	445978.38	649784.76	N 32 13 32.10	W 103 58 57.47
	10563.00	90.22	3.70	10052.56	1387.58	1298.58	1107.58	14.7	1706.76	40.46	446051.18	649790.09	N 32 13 32.82	W 103 58 57.40
	10583.00	90.35	3.44	10052.46	1407.57	1318.55	1108.82	1.47	1722.80	40.06	446071.14	649791.33	N 32 13 33.02	W 103 58 57.39
	10678.00	89.33	2.16	10052.73	1502.51	1413.43	1113.46	1.72	1799.33	38.23	446166.02	649795.97	N 32 13 33.96	W 103 58 57.33
	10771.00	91.02	1.43	10052.44	1595.37	1506.34	1116.37	3.31	1874.96	36.54	446258.96	649798.89	N 32 13 34.88	W 103 58 57.29
	10864.00	93.65	359.82	10048.65	1688.03	1599.28	1117.39	1.31	1950.97	34.94	446351.86	649799.90	N 32 13 35.80	W 103 58 57.28
	10959.00	94.30	10042.07	1782.29	1694.03	1115.60	1115.60	33.37	2028.38	33.37	446449.60	649798.11	N 32 13 36.74	W 103 58 57.29
330' FSL Crossing	11053.00	93.60	357.77	10035.59	1875.37	1787.75	1112.14	0.79	2105.45	31.89	446540.30	649794.65	N 32 13 37.66	W 103 58 57.33
	11147.00	91.52	357.70	10031.39	1968.55	1881.57	1108.43	2.21	2183.79	30.50	446634.12	649790.94	N 32 13 38.59	W 103 58 57.37
	11241.00	91.46	356.95	10028.95	2061.71	1975.44	1104.05	0.80	2263.02	29.20	446727.98	649786.56	N 32 13 39.52	W 103 58 57.42
	11335.00	89.73	356.75	10027.97	2154.79	2069.29	1098.88	1.85	2342.97	27.97	446821.82	649781.39	N 32 13 40.45	W 103 58 57.47
	11428.00	90.00	356.67	10028.19	2246.85	2162.14	1093.54	0.30	2422.95	26.83	446914.66	649776.06	N 32 13 41.37	W 103 58 57.53
	11522.00	89.63	356.69	10039.69	2339.93	2255.97	1098.10	1.56	2504.67	25.75	447008.49	649770.62	N 32 13 42.30	W 103 58 57.59
	11616.00	88.96	356.48	10031.46	2432.89	2349.78	1082.50	0.51	2587.13	24.73	447102.29	649765.02	N 32 13 43.23	W 103 58 57.65
	11710.00	88.74	356.36	10033.34	2525.85	2443.58	1076.63	0.27	2670.24	23.78	447196.08	649759.15	N 32 13 44.15	W 103 58 57.72
	11804.00	89.06	356.72	10035.15	2618.85	2537.39	1070.96	0.51	2754.14	22.88	447289.88	649753.48	N 32 13 45.08	W 103 58 57.78
	11897.00	89.91	356.54	10036.80	2710.88	2630.21	1065.50	0.25	2837.83	22.05	447382.70	649748.01	N 32 13 46.00	W 103 58 57.84
100' FNL Crossing	11992.00	88.11	356.85	10038.44	2804.90	2725.04	1060.02	0.39	2923.95	21.26	447477.52	649742.54	N 32 13 46.94	W 103 58 57.90
	12087.00	88.94	356.56	10040.14	2898.93	2819.87	1054.58	1.22	3010.34	20.50	447572.34	649737.08	N 32 13 47.82	W 103 58 57.96
	12182.00	88.48	356.02	10042.36	2992.85	2914.64	1048.42	0.68	3097.47	19.78	447667.11	649732.03	N 32 13 48.82	W 103 58 58.03
	12275.00	90.18	356.10	10043.45	3084.74	3007.41	1042.03	1.83	3182.82	19.11	447759.87	649724.54	N 32 13 49.74	W 103 58 58.10
	12369.00	90.04	356.80	10043.26	3177.73	3101.23	1036.21	0.76	3269.76	18.48	447853.68	649718.72	N 32 13 50.66	W 103 58 58.16
	12463.00	90.14	356.89	10043.12	3270.82	3195.09	1031.03	0.14	3357.32	17.88	447947.53	649713.55	N 32 13 51.59	W 103 58 58.22
	12557.00	90.19	356.98	10042.85	3363.92	3288.95	1026.01	0.11	3445.27	17.33	448041.39	649708.52	N 32 13 52.52	W 103 58 58.28
	12651.00	92.09	359.24	10040.98	3457.24	3382.87	1022.91	0.14	3534.14	16.82	448135.30	649705.42	N 32 13 53.45	W 103 58 58.31
	12745.00	90.46	358.87	10038.88	3550.74	3476.63	1021.36	1.78	3623.75	16.02	448229.26	649703.97	N 32 13 54.38	W 103 58 58.35
	12839.00	89.44	358.46	10038.97	3644.19	3570.81	1019.17	1.17	3713.40	15.93	448323.22	649701.68	N 32 13 55.31	W 103 58 58.34
100' FNL Crossing	12934.00	89.39	358.87	10039.94	3738.63	3665.78	1016.95	0.43	3804.22	15.50	448418.18	649699.47	N 32 13 56.25	W 103 58 58.37
	13028.00	89.38	358.98	10040.95	3832.12	3759.75	1015.19	0.12	3894.40	15.11	448512.15	649697.71	N 32 13 57.18	W 103 58 58.38
	13122.00	89.63	358.92	10041.76	3925.62	3853.73	1013.47	0.27	3984.77	14.73	448606.13	649695.99	N 32 13 58.11	W 103 58 58.40
	13217.00	89.55	358.68	10042.44	4020.09	3948.71	1011.48	0.27	4076.20	14.37	448701.10	649694.00	N 32 13 59.05	W 103 58 58.42
	13340.00	89.59	359.26	10043.86	4208.09	4137.67	1008.08	0.31	4258.71	13.69	448890.04	649691.84	N 32 14 00.02	W 103 58 58.45
	13500.00	89.41	359.59	10044.68	4301.66	4231.67	1007.14	0.40	4349.86	13.39	448984.03	649689.66	N 32 14 01.00	W 103 58 58.46
	13594.00	89.18	359.40	10045.83	4395.25	4325.65	1006.31	0.32	4441.16	13.10	449078.01	649688.83	N 32 14 02.00	W 103 58 58.47
	13689.00	90.15	360.00	10046.39	4489.86	4420.65	1005.81	1.20	4533.63	12.82	449173.00	649688.33	N 32 14 03.00	W 103 58 58.47
	13782.00	90.36	359.28	10045.97	4586.47	4513.65	1005.23	0.81	4624.23	11.89	449265.99	649687.59	N 32 14 04.00	W 103 58 58.47
	13877.00	90.54	0.83	10045.23	4677.14	4608.64	1005.32	1.64	4717.02	12.31	449360.97	649687.84	N 32 14 05.00	W 103 58 58.47
100' FNL Crossing	13971.00	90.47	0.75	10044.40	4770.90	4702.63	1006.61	1.11	4809.16	12.08	449454.95	649688.13	N 32 14 06.00	W 103 58 58.45
	14066.00	90.03	360.00	10043.99	4865.61	4797.62	1007.24	0.92	4902.22	11.86	449549.94	649687.76	N 32 14 07.00	W 103 58 58.44
	14159.00	89.82	359.59	10044.11	4958.24	4890.62	1006.90	0.50	4993.20	11.63	449642.93	649688.92	N 32 14 08.00	W 103 58 58.44
	14254.00	89.19	358.14	10044.93	5052.72	4985.60	1005.02	1.66	5085.89	11.40	449737.90	649687.54	N 32 14 09.00	W 103 58 58.46
	14347.00	89.97	358.02	10045.61	5145.07	5078.54	1001.91	0.85	5176.43	11.16	449830.84	649684.43	N 32 14 10.23	W 103 58 58.49
	14442.00	89.02	358.56	10046.45	5239.44	5173.50	999.07	1.15	5269.08	10.93	4499252.7			

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100R)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Survey Program:														
Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type		Borehole / Survey					
	1	0.000	24.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only		Heads CC 9.4 Fed Com 36H / Oxy Heads CC 9.4 Fed Com 36H Gyro+MWD 0' to 20802MD					
	1	24.000	24.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only		Heads CC 9.4 Fed Com 36H / Oxy Heads CC 9.4 Fed Com 36H Gyro+MWD 0' to 20802MD					
	1	24.000	535.960	Act Stns	26.400	26.400	GYD_GC+DROP+OH		Heads CC 9.4 Fed Com 36H / Oxy Heads CC 9.4 Fed Com 36H Heads CC 9.4 Fed Com 36H / Oxy					
	1	535.960	9573.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS		Heads CC 9.4 Fed Com 36H Gyro+MWD 0' to 20802MD					
	1	9573.000	9889.000	Act Stns	26.400	26.400	A009Mb_MWD+IFR1+SAG		Heads CC 9.4 Fed Com 36H / Oxy Heads CC 9.4 Fed Com 36H					
	1	9889.000	20802.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS		Heads CC 9.4 Fed Com 36H / Oxy Heads CC 9.4 Fed Com 36H Gyro+MWD 0' to 20802MD					

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-015-49683	
5. Indicate Type of Lease- FED STATE ☐ FEE ☐	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name HEADS CC 9-4 FEDERAL COM	
8. Well Number- 36H	
9. OGRID Number- 16696	
10. Pool name or Wildcat PURPLE SAGE WOLFCAMP	
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐ 2. Name of Operator- OXY USA INC. 3. Address of Operator- P.O. BOX 50250 MIDLAND, TX 79710 4. Well Location Unit Letter <u>B</u> : <u>964</u> feet from the <u>NORTH</u> line and <u>1636</u> feet from the <u>EAST</u> line Section <u>16</u> Township <u>24S</u> Range <u>29E</u> NMPM County- <u>EDDY</u> 11. Elevation (Show whether DR, RKB, RT, GR, etc.) 2927' GL	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
DOWNHOLE COMMINGLE ☐	P AND A ☐
CLOSED-LOOP SYSTEM ☐	CASING/CEMENT JOB ☐
OTHER: ☐	OTHER: COMPLETION ☒

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

RUPU 09/29/22, RIH & clean out to PBTD @ 20754', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 10576-20659' Total 1230 holes. Frac in 41 stages w/ 224446BBL Produced Water + 155764BBL Brackish Water (> 1,000 mg/I TDS and < 10,000 mg/I TDS) w/ 20484080# sand, RD NexTier 10/17/22. Well ready to produce 10/24/22. 12/27/22 RIH with 2-7/8" L80 tbg & gas lift set @ 9596', RD 12/28/22.

Formation Tops for this completion are as follows:

RUSTLER	242'M	242'V
SALADO	655'M	655'V
CASTILE	1340'M	1340'V
DELAWARE	2947'M	2947'V
BELL CANYON	2984'M	2984'V
CHERRY CANYON	3816'M	3816'V
BRUSHY CANYON	5068'M	5040'V
BONE SPRING	6704'M	6642'V
1ST BONE SPRING	7740'M	7664'V
2ND BONE SPRING	8556'M	8463'V
3RD BONE SPRING	9723'M	9599'V
WOLFCAMP	10123'M	9938'V

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE  TITLE SR. REGULATORY ANALYST DATE 03-02-23

Type or print name JANA MENDIOLA E-mail address: janalyn_mendiola@oxy.com PHONE: 432-685-5936

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____

Conditions of Approval (if any):

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL API NO. 30-015-49683		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN		
								3. State Oil & Gas Lease No.		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER								5. Lease Name or Unit Agreement Name HEADS CC 9-4 FEDERAL COM		
8. Name of Operator: OXY USA INC.								6. Well Number: 36H		
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710								11. Pool name or Wildcat PURPLE SAGE WOLFCAMP		
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	B	16	24S	29E		964	NORTH	1636	EAST	EDDY
BH:	A	4	24S	29E	L1	44	NORTH	592	EAST	EDDY
13. Date Spudded 07/04/2022	14. Date T.D. Reached 08/26/2022		15. Date Rig Released 08/29/2022			16. Date Completed (Ready to Produce) 10/24/2022		17. Elevations (DF and RKB, RT, GR, etc.) 2927' GL		
18. Total Measured Depth of Well 20802'M 10057'V			19. Plug Back Measured Depth 20754'M 10057'V			20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 10576-20659' WOLFCAMP										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13.375" J55		54.5		550'		17.5"		1656sx-surf circ		
9.625" HCL80		40		9534'		12.25"		3247sx-surf circ		
7" x 5.5" P110		32#, 20#		20782'		8.75" x 8.5"		2032sx-TOC@4111'		
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		25. TUBING RECORD				
						SIZE		DEPTH SET		PACKER SET
						2.875"		9596'		
26. Perforation record (interval, size, and number) Perf @ 10576-20659' Total 1230 holes, Hole Size=0.42										
						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						10576-20659'		224446BBL Produced Water + 155764BBL Brackish Water (> 1,000 mg/l TDS and < 10,000 mg/l TDS) w/ 20484080# sand		
28. PRODUCTION										
Date First Production 10/27/2022		Production Method (Flowing, gas lift, pumping - Size and type pump) Gas Lift				Well Status (Prod. or Shut-in) Prod.				
Date of Test 12/09/2022	Hours Tested 24 hrs.	Choke Size 128/128	Prod'n For Test Period	Oil - Bbl 4055	Gas - MCF 4497	Water - Bbl. 7064	Gas - Oil Ratio 1109			
Flow Tubing Press.	Casing Pressure 570	Calculated 24-Hour Rate	Oil - Bbl. 4055	Gas - MCF 4497	Water - Bbl. 7064	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By		
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial: Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>02/08/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 242'	T. Bell Canyon 2984'	T. Ojo Alamo	T. Penn A"
T. Salado 655'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1340'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2947'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3816'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 5068'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Spring 6704'	T. Todilto	
T. Abo	T. 1 st Bone Spring 7740'	T. Entrada	
T. Wolfcamp 10123'	T. 2 nd Bone Spring 8556'	T. Wingate	
T. Penn	T. 3 rd Bone Spring 9723'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

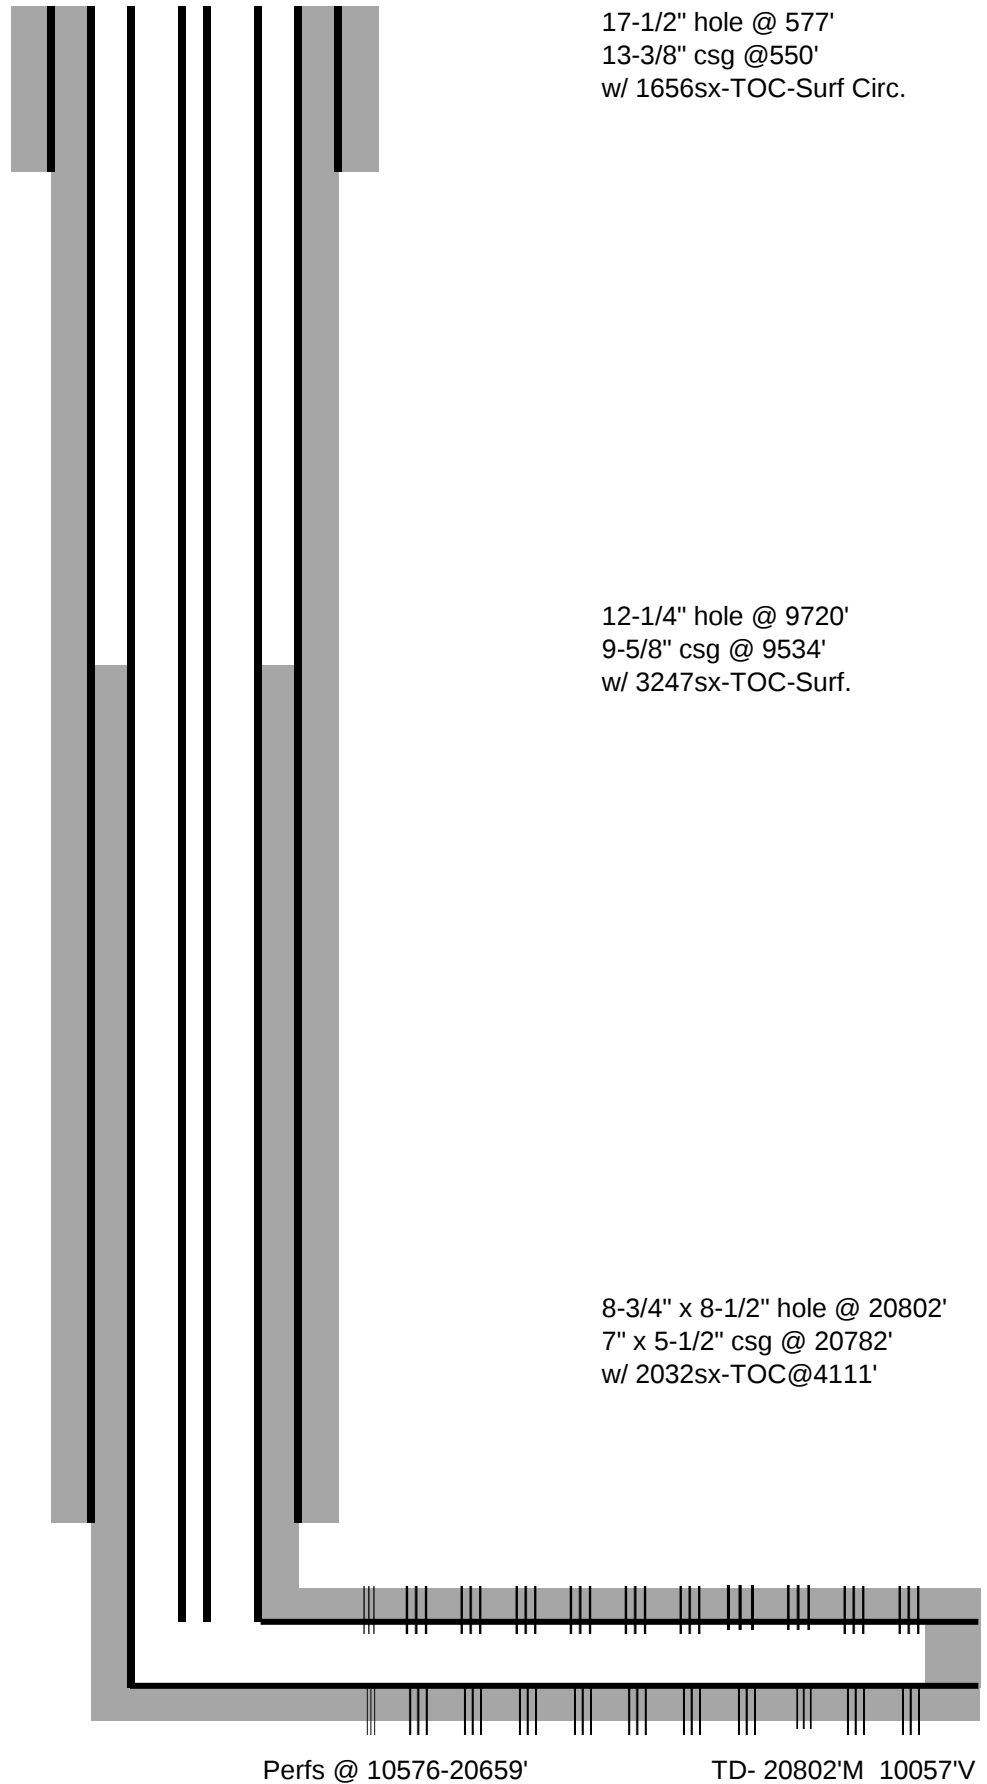
No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Heads CC 9-4 Federal Com 36H
API No. 30-015-49683



District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 192724

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 192724
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 192724

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 192724
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report and 3160-5 Completion Sundry within 10 days to NMOCD after BLM approval.	5/25/2023
plmartinez	Submit CBL to OCD Permitting as [UF-WL] EP Well Log Submission.	5/25/2023