

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-25377
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator SILVERBACK OPERATING II, LLC		6. State Oil & Gas Lease No.
3. Address of Operator 19707 West IH 10, Suite 201 San Antonio, TX 78257		7. Lease Name or Unit Agreement Name SCRIPPS
4. Well Location Unit Letter <u>K</u> : <u>2145</u> feet from the <u>South</u> line and <u>1980</u> feet from the <u>West</u> line Section <u>25</u> Township <u>18S</u> Range <u>26E</u> NMPM County <u>Eddy</u>		8. Well Number 6
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3278' GR		9. OGRID Number 330968
		10. Pool name or Wildcat ATOKA; GLORIETA-YESO

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	P AND A <input checked="" type="checkbox"/>
CLOSED-LOOP SYSTEM <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>
OTHER: <input type="checkbox"/>	OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Silverback has completed the P&A on the subject well as follows:

06/20/2023 MIRU AAA Well Service P&A rig. POOH with rods and pump. NU BOP'S. POOH w/ tbg well setting.

06/21/2023 WIH w/ CIBP on tbg and set at 2869'. Tested csg to 500 psi. Spotted 25 sk cl C cmt plug from 2605'-2868'. WOC and tagged plug at 2605'. Displaced hole with FW mud. Perf'd at 1065'. Could not pump in. Received approval from OCD to spot balanced plug. Spotted 25 sk cl C cmt plug from 850-1115'.

06/22/2023 Tagged plug at 850'. SD due to a trucking issue.

06/23/2023 Spotted 26 sk cl C cmt plug from surface to 260'. ND BOP's. RD rig.

Wellbore schematics attached.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Fatma Abdallah TITLE Regulatory Manager DATE 08/02/2023

Type or print name Fatma Abdallah E-mail address: fabdallah@silverbackexp.com PHONE: (210) 585-3316

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Specialist DATE 8/4/23

Conditions of Approval (if any):

Scripps #6 Final P&A'd Well Sketch

COMMENTS

Surface plug CI C cmt: 0-260'

CI C cmt plug 850'-1115'


Perf'd 1065', could not inject

CIBP @ 2,869' CI C cmt plug
2,605'-2,868'

Yeso Perfs: 2916'-3102' (21 holes .43 cal)

Yeso Perfs: 3185'-3377' (21 holes .43 cal)

A

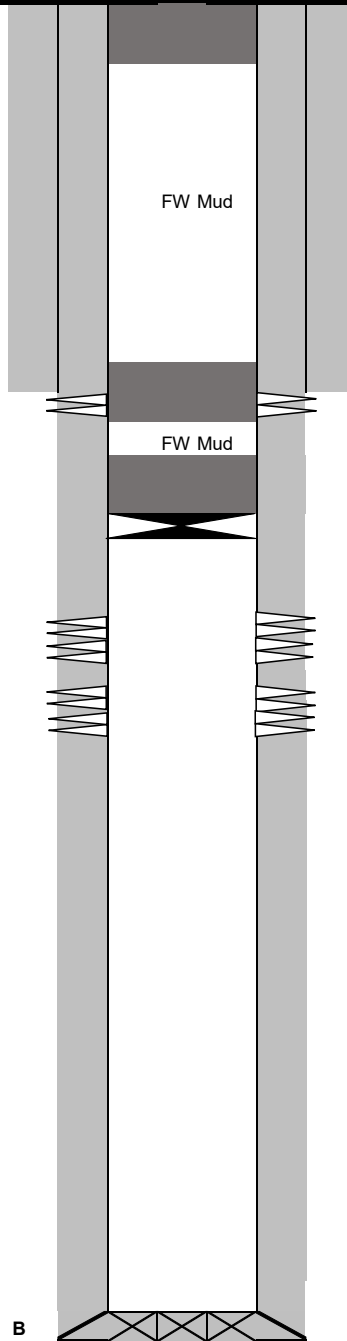

B

PBTD: N/A MD

TD: 3678' MD

Sec-TWN-RNG: 25-18S-26E-Unit K				30-015-25377					
Footage Calls: 2145' FSL 1980' FEL				Elev 3278' GR					
Lat/Long (NAD83): 32.7172699,-104.3377457 NAD83									
CASING DETAIL									
#	HOLE	CSG	WGHT	GRADE	Top	Depth	TOC	SX	
A	11 3/4	8 5/8	24	J-55	0	939	circulated	390sks/w 200sks 2%CALC	
B	8 5/8	5 1/2	15.5	J-55	0	3,678	circulated	250sks DLWIII 300sks Tailend	
FORMATION TOPS									
FORMATION		TOP (FT)		FORMATION			TOP		
San Anders		1,212							
Yeso		2,916							
TUBING DETAIL									
OD		GRADE		WGHT		TOP		BASE	
2 3/8								3,580	
PERFORATION DETAIL									
	FORMATION			TOP		BASE		TREATMENT	
A	Yeso			3,185		3,377		84,000 gal 20# gel, 95,000 20/40 sand, 67,000# 12/20 sand	
B	Yeso			2,916		3,102		106,000 gal 20# gel, 125,000# 20/40 sand, 67,000# 12/20 sand	
C									
D									
E									
PLUGS									
#	sx	Class	Top	Bottom	Ht	Notes		Tag	
1	25	C	2605	2868	263	CIBP & cmt plug to cover yeso perfs		Y	
2	25	C	850	1,115	265	Cmt plug across surface shoe		Y	
3	26	C	0	260	260	Surface plug			
4									
5									
6									
7									

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 247429

CONDITIONS

Operator: Silverback Operating II, LLC 19707 IH10 West, Suite 201 San Antonio, TX 78256	OGRID: 330968
	Action Number: 247429
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
john.harrison	None - Well P&A'd 6/23/23	8/4/2023