

Well Name: POLLY TURPIN	Well Location: T25N / R12W / SEC 27 / NWNE / 36.377533 / -108.096008	County or Parish/State: SAN JUAN / NM
Well Number: 1	Type of Well: OIL WELL	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: N00C14205579	Unit or CA Name:	Unit or CA Number:
US Well Number: 3004526312	Well Status: Abandoned	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2767691

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 01/02/2024

Time Sundry Submitted: 09:45

Date Operation Actually Began: 12/19/2023

Actual Procedure: The subject well was Plugged & Abandoned on 12/19/2023 per the attached End of Well Report, As Plugged Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

EOWR_BLM_Submittal_20240102094513.pdf

Well Name: POLLY TURPIN

Well Location: T25N / R12W / SEC 27 / NWNE / 36.377533 / -108.096008

County or Parish/State: SAN JUAN / NM

Well Number: 1

Type of Well: OIL WELL

Allottee or Tribe Name: EASTERN NAVAJO

Lease Number: N00C14205579

Unit or CA Name:

Unit or CA Number:

US Well Number: 3004526312

Well Status: Abandoned

Operator: DJR OPERATING LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: JAN 02, 2024 09:45 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 ROAD 3263

City: AZTEC

State: NM

Phone: (505) 632-3476

Email address: SFORD@DJRLLC.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: MATTHEW H KADE

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647736

BLM POC Email Address: MKADE@BLM.GOV

Disposition: Accepted

Disposition Date: 01/03/2024

Signature: Matthew Kade

DJR Operating, LLC
P&A End of Well Report
Polly Turpin 1
API # 30-045-26312
NW/NE, Unit B. Sec 27, T25N, R12W
San Juan County, NM
Spud Date: 4-13-1985
Plug Date: 12-19-2023

12-13-2023:

MIRU rig and equipment. SITP = N/A, SICP = 10, BH = 0. TIH with bit and string mill to 4552', tagged CIBP set in 6-30-2023 as frac protect from off-set fracs. Load and roll hole, PT casing, did not test. Could not TOO H due to heavy winds. Received prior approval to spot Plug 1 on top of CIBP from regulatory agencies on 6-30-2023, and reconfirmed on 12-13-2023.

12-14-2023:

TOOH with 2 3/8" workstring, bit and string mill.

RIH, run CBL from 4552' to surface. POOH.

TIH with workstring and tagging sub to 4552'.

P&A Plug 1: Gallup formation top: Mix and pump a plug of 21 sx from 4552'. WOC.

TIH, tagged Plug 1 at 4354'.

Pull up to 3730'.

P&A Plug 2: Mancos formation top: Mix and spot a balanced plug of 18 sx from 3730'. WOC.

12-15-2023:

TIH, tagged Plug 2 at 3599'. Pull up to 1888'. PT casing, did not test.

P&A Plug 3: Mesa Verde formation top: Mix and spot a balanced plug of 18 sx from 1888'. WOC.

TIH, tagged Plug 3 at 1753'. Pull up to 1475'. PT casing, did not test.

P&A Plug 4: Chacra and Pictured Cliffs formation tops: Mix and spot a balanced plug of 56 sx from 1475'. WOC.

12-18-2023:

TIH, Tagged Plug 4 at 995'. TOO H.

RIH, perforate holes at 714'. POOH.

Attempt to establish injection into holes at 714'. Could not inject. Obtained approval from BLM and NMOCD to spot inside plug over Fruitland and Kirtland.

TIH to 741'.

P&A Plug 5: Fruitland and Kirtland formation tops: Mix and spot a balanced plug of 47 sx from 741'. Pull up and reverse out at 352'. WOC.

TIH, tagged Plug 5 at 352'. TOO H.

RIH, perforate holes at 300'. POOH.

Establish injection, but no returns out BH. Obtained approval from BLM and NMOCD to pump Plug 6 down casing.

P&A Plug 6: Surface casing shoe to surface: Mix and pump plug of 96 sx down casing, no returns out BH. SD. WOC.

12-19-2023:

NDBOP. TOC in 5 1/2" casing at 7'.

Cut off WH. TOC at 68' in 8 5/8" casing. Install P&A marker.

P&A Plug 7: Top off casings and cellar with poly pipe. Mix and pump plug of 28 sx.
All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx.
Regulatory representative; Natasha Dishface, Navajo Minerals and Monica Kuehling, NMOCD
via phone
GPS Coordinates: Lat; 36.37760 N, Long; 108.09667 W

DJR Operating, LLC
P&A End of Well Report
Polly Turpin 1
API # 30-045-26312
NW/NE, Unit B. Sec 27, T25N, R12W
San Juan County, NM
Spud Date: 4-13-1985
Plug Date: 12-19-2023



**End of Well Report
DJR Operating, LLC
Polly Turpin 1
API # 30-045-26312
NW/NE, Unit B, Sec 27, T25N, R12W
San Juan County, NM**

GL 6338'
KB 6350'
Spud Date 4/13/1985

SURF CSG


Hole size: 12.25"
Csg Size: 8.625"
Wt: 24#
Grade: J-55
ID: 8.097"
Depth: 280'
Csg cap ft3: 0.3576
TOC: Surface

FORMATION TOPS

Nacimiento	Surface
Ojo Alamo	BSC
Kirtland	440'
Fruitland	665'
Pictured Cliffs	1094'
Chacra	1424'
Mesa Verde	1838'
Mancos	3680'
Gallup	4602'

PROD CSG

Hole size: 7.875"
Csg Size: 5.5"
Wt: 15.5#
Grade: K-55
ID: 4.95"
Depth: 4942'
Csg cap ft3: 0.1336
Csg/Csg Ann ft3: 0.1926
Csg/OH cap ft3: 0.1732
TOC: Surface (Calc.) Partial CBL all good.

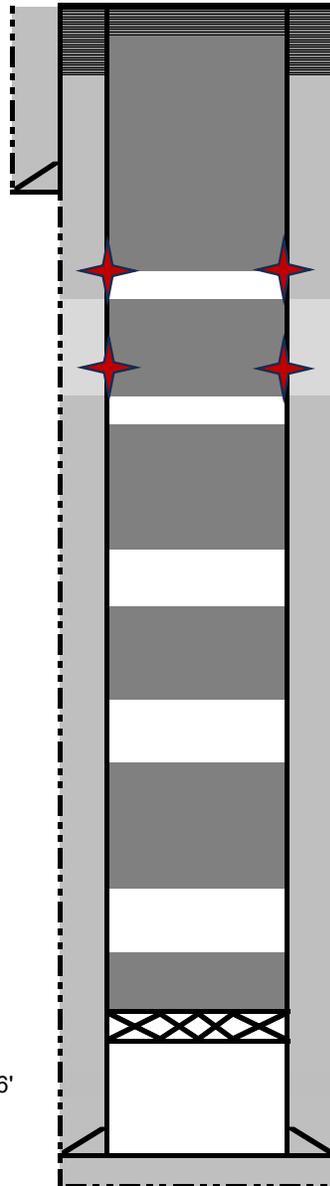

Perfs 4606-4796'
PBTD 4893'
TD 4945'

12-19-2023: Plug 7: Top off: Tagged Plug 6 in 5 1/2" casing at 7'. Cut off WH, TOC in 8 5/8" casing at 68'. Install P&A marker. Top off casings and cellar with poly pipe using 28 sx.
12-18-2023: Plug 6: Ojo Alamo, surface casing shoe to surface: Perforate holes at 300'. Establish injection, no BH returns. Approval to pump Plug 6 down casing. Mix and spot plug of 96 sx down casing, no BH returns.
12-18-2023: Plug 5: Fruitland and Kirtland: Perforate holes at 714', could not inject. Approval to spot balanced plug of 47 sx from 741'. WOC, tagged Plug 5 at 352'.
12-15-2023: Plug 4: Chacra and Pictured Cliffs: PT casing, did not test. Mix and spot a balanced plug of 56 sx from 1475'. WOC. 12-18-2023: Tagged Plug 4 at 995'.
12-15-2023: Plug 3: Mesa Verde: Mix and spot a balanced plug of 18 sx from 1888'. WOC. Tagged Plug 3 at 1753'. PT casing, did not test.
12-14-2023: Plug 2: Mancos: PT casing, did not test. Mix and spot balanced plug of 18 sx from 3730'. WOC. 12-15-2023: Tagged Plug 2 at 3599'. PT casing, did not test.
12-14-2023: Plug 1: Gallup: Mix and spot balanced plug of 21 sx from 4552'. WOC. Tagged Plug 1 at 4354'.
12-14-2023: Run CBL from 4552' to surface.
12-13 -2023: Load and roll hole. PT casing, did not test.
CIBP Set at 4552', 6-30-2023. Frac protect from off-set fracs.

Received prior approval to spot Plug 1 on top of CIBP from regulatory agencies on 6-30-2023, and reconfirmed on 12-13-2023.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx
Regulatory representatives: Natasha Dishface, Navajo Minerals, Monica Kuehling, NMOCD via phone
GPS Coordinates: Lat 36.37760 N, Long; 108.09667 W

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 300308

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 300308
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	well plugged 12/19/2023 - for record	1/16/2024