

Submit a Copy To Appropriate District
Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-38256	
5. Indicate Type of Lease STATE ☒ FEE ☐	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name MARBOB STATE	
8. Well Number 004	
9. OGRID Number 228937	
10. Pool name or Wildcat MILLMAN; YATES-SR-QN-GB-SA, EAST	
4. Well Location Unit Letter <u>G</u> : <u>1650</u> feet from the <u>N</u> line and <u>2310</u> feet from the <u>E</u> line Section <u>19</u> Township <u>19S</u> Range <u>29E</u> NMPM County <u>EDDY</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3374' GL	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☒
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

7/17/24: MIRU WOR; NU & function test BOPs; Load casing and pressure test to 550 psi for 30 minutes, good test; RIH & tag TOC @ 1,787' WLM; Run CBL to surface; TIH & tag TOC @ 1,786' TM; Circulate wellbore full of MLF; PU & spot a 40 sk Class C cement balanced plug @ 1,125' TM.

7/18/24: TIH & tag TOC @ 703' TM; RIH & perf @ 475' WLM; Establish circulation & Squeeze 226 sks of Class C cement from surface to surface and into formation; WOC for 4 hrs; Cut & removed wellhead; Verified cement to surface in 5-1/2" x 8-5/8" casing annulus; Tag cement at 18' in 5-1/2" production casing; Top off production casing (2 sks Class C); Cement to surface on all strings; Install dryhole marker; Fill cellar and back drag location.

Spud Date: 2/25/2011

Plug Date: RDMO; 7/18/24

NMOCD Inspector: David Alvarado


Spud Date:

02/25/2011

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

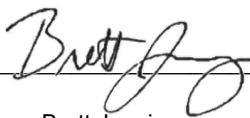

TITLE Regulatory Analyst

DATE 09/11/2024

Type or print name Brett Jennings

Technical contact:

E-mail address: Brett.Jennings@matadorresources.com PHONE: 972-629-5160

or State Use Only

PPROVED BY:

TITLE

DATE

Conditions of Approval (if any): Conditions of Approval (if any):

7/17/24: MIRU WOR; NU & function test BOPs; Load casing and pressure test to 550 psi for 30 minutes, good test; RIH & tag TOC @ 1,787' WLM; Run CBL to surface; TIH & tag TOC @ 1,786' TM; Circulate wellbore full of MLF; PU & spot a 40 sk Class C cement balanced plug @ 1,125' TM.

7/18/24: TIH & tag TOC @ 703' TM; RIH & perf @ 475' WLM; Establish circulation & Squeeze 226 sks of Class C cement from surface to surface and into formation; WOC for 4 hrs; Cut & removed wellhead; Verified cement to surface in 5-1/2" x 8-5/8" casing annulus; Tag cement at 18' in 5-1/2" production casing; Top off production casing (2 sks Class C); Cement to surface on all strings; Install dryhole marker; Fill cellar and back drag location.

Spud Date: 2/25/2011

Plug Date: RDMO; 7/18/24

NMOCD Inspector: David Alvarado





JMR
Services®
ODESSA, TX / HOBBS, NM
USDOT 769905

WATERBURY WHITE PLASTER
30.015.3856 EDDY LN
11.18.81




MATATDOR PRODUCTION COMPANY
Marbob State #004
1650' FNL & 2310' FEL Sec 19 - 19S - 29E
Eddy County, NM
API: 30-015-38256
As Plugged WELLBORE SCHEMATIC
Spudded: 2/25/2011

Casing Information	
Hole Size	Casing Size
Surface	12 1/4
Production	7 7/8
Marker Jt.	1863

Type	Weight lb/ft	Joints	Depth Set
J-55	24	9	376
J-55	15.5	63	2,563

Cementing Record

Surface	Cemented with 370sx Halcem C; Circulated 8sx to surface
Production	Cemented with 304sx; Circulated 6sx Lead: 109sx Econocem; Tail: 195sx Halcem

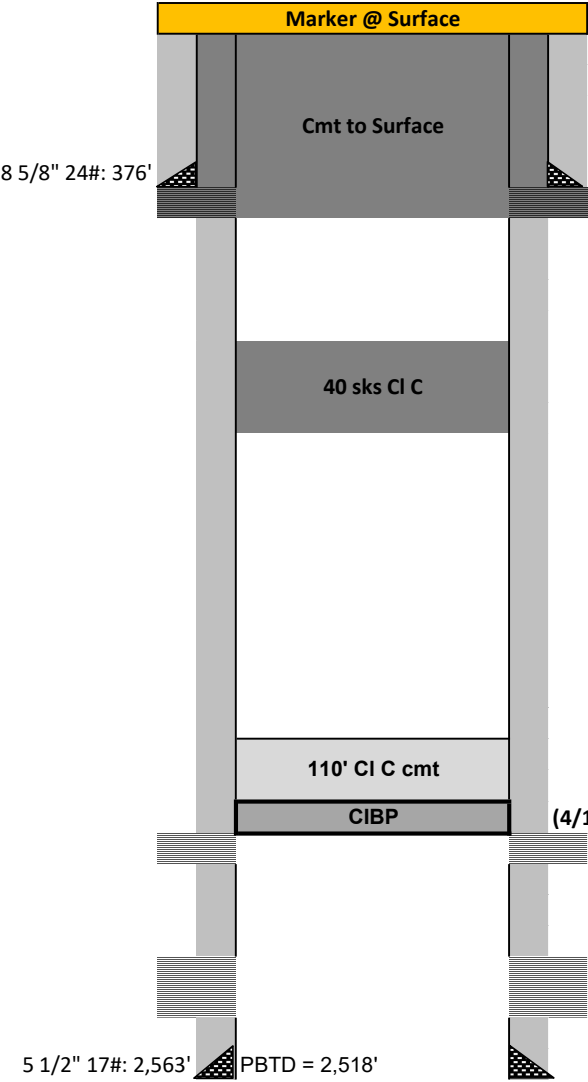

7/18/24: Cut & removed wellhead; Verified cement to surface in 5-1/2" x 8-5/8" casing annulus; Tag cement at 18' in 5-1/2" surface casing.
Top off Production Casing (2 sks Class C); Cement to surface on all strings; Install dryhole marker; Fill cellar and back drag location.

7/18/24: RIH & perf @ 475' WLM; Establish circulation & Squeeze 226 sks of Class C cement from surface to surface and into formation; WOC for 4 hrs.

7/18/24: TIH & tag TOC @ 703' TM.

7/17/24: PU & spot a 40 sk Class C cement balanced plug @ 1,125' TM.

7/17/24: RIH & tag TOC @ 1,787' WLM; Run CBL to surface; TIH & tag TOC @ 1,786' TM; Circulate wellbore full of MLF.

(4/14/21) Set CIBP @ 1,900' WLM; dump bail 110' CI C cmt on CIBP; Pressure test casing (TOC: 1,790')
(07/2011) Perf'd 1963' - 2060'; 1 SPF 0.39" (24 Holes) Acidz w/1500 gal 15% Nefe, Frac w/115klb sand
7/17/24: MIRU WOR; NU & function test BOPs; Load casing and pressure test to 550 psi for 30 minutes, good test.

(07/2011) Perf'd 2242' - 2410'; 1SPF; 0.39" (31 Holes) Acidz w/1500 gal 15% Nefe, Frac w/115klb sand

Geologic Markers	
T. Salt	420
B. Salt	825
Yates	1074
7 Rivers	1316
Queen	1945
Grayburg	2345

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 382744

CONDITIONS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 382744
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
kfortner	Need C103Q and marker photo to release CBL is in files DHM set 7/18/24	11/4/2024