Received by OCD 19/9/2025 3:40:52 PM State of New Mexico Phone: (505) 476-3441 Energy, Minerals and Natural Resources General Information WELL API NO. Phone: (505) 629-6116 30-025-27295 OIL CONSERVATION DIVISION Online Phone Directory Visit: 5. Indicate Type of Lease https://www.emnrd.nm.gov/ocd/contact-us/ 1220 South St. Francis Dr. STATE FEE Santa Fe, NM 87505 6. State Oil & Gas Lease No. SUNDRY NOTICES AND REPORTS ON WELLS 7. Lease Name or Unit Agreement Name (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A EAST VACUUM (GSA) UNIT DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 8. Well Number 001 1. Type of Well: Oil Well Gas Well Other 9. OGRID Number 2. Name of Operator 331199 Maverick Permian LLC 10. Pool name or Wildcat 3. Address of Operator 1000 Main Street Ste 2900 Houston, TX 77002 4. Well Location feet from the North 1175 Unit Letter feet from the line and County East **NMPM** line Section Township 35E Range 26 11. Elevation (Show whether DR, RKB, RT, GR, etc.) 12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF: PLUG AND ABANDON ALTERING CASING □ PERFORM REMEDIAL WORK \square REMEDIAL WORK P AND A **TEMPORARILY ABANDON** CHANGE PLANS COMMENCE DRILLING OPNS.□ MULTIPLE COMPL CASING/CEMENT JOB PULL OR ALTER CASING Notify OCD 24 hrs. prior to any work DOWNHOLE COMMINGLE П **CLOSED-LOOP SYSTEM** done, gilbert.cordero@emnrd.nm.gov OTHER: OTHER: so a CO may be assigned. 13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. Please see attached P&A plan submitted for your review. Failed MIT 5/15/25 - Corrective Action Due 8/13/25 - Well not repaired SEE CHANGES TO PROCEDURE Rig Release Date: Spud Date: ***SEE ATTACHED COA's*** MUST BE PLUGGED BY 9/12/26



EVGSAU 2672-001H P&A Procedure

Note: Based on observations during failed MIT, suspect possibility of a hole in casing. Procedure includes hole hunting operation to ensure casing integrity and proper reactive plug additions as necessary.

Note: All cement is to be Class C mixed at 14.8ppg, yield 1.32cuft/sack. Cement volumes are based on inside capacities +50' excess and outside capacities +100% excess.


- 1. MIRU WOR & equipment. Test anchors if not tested within the last two years.
- 2. Ensure well is dead. Kill well if needed with 10# brine.
- 3. ND WH. NU BOP's.
- 4. Release Packer.

APPROVED GC 9/12/25

- 5. POOH with tubing and packer. Note condition of tubing and BHA. Upon visual inspection, replace tubing as needed to conduct operations. Scan tubing at the yard and return yellow and blue band to inventory.
- 6. MIRU WL Unit. Set 5-1/2" CIBP @ 4,488'. Test CIBP to 500psi/30min. Bubble Test. Run CBL 4488' to surface. Any cement plug above TOC will require perf and squeeze. Reference CBL run.
- 7. cement plug above TOC will require perf and squeeze. Reference CBL run.
- 8. RIH with tubing and 5-1/2" packer to 4,450'. It may be necessary to hydrotest tubing or utilize a workstring depending on the results of the visual tubing inspection conducted during the initial pull.
- 9. Assuming test is successful, begin series of pressure tests to locate source of suspected casing leak. Pull uphole with test packer and pressure test to 500# for 30 min both above and below packer every 1,000'. Smaller increments may be used once the general area of the leak is known.
- 10. Bleed off pressure. Release packer. POOH with tubing and packer.
- 11. RIH with workstring to 4,488'. Displace well with gel water.
- 12. Suspect Bad Casing No Casing Inspection Log Cement 4488' In/Out to Surface



- $\textbf{13.} \ \, \text{Circulate cement to surface and top fill. WOC 6 hrs. Bubble test.}$
- **14.** Cut wellhead and install AGL dry hole marker.
- **15.** RDMO WOR & equipment.

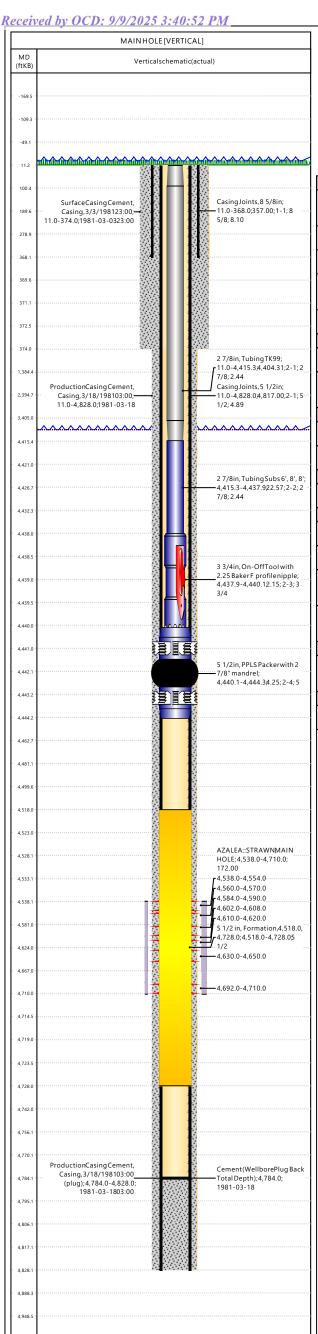



				ene	erg	У										
WellInformatio	n															
Well Name EAST VACUUMGB-SAUNIT 2672-001W				API/UWI 3002527295				DGOCWell Code 1237390								
County LEA						ate/Pr EW I)							
OriginalKB Elevation(3,925.00	ft)	Groun 3,91		evation	(ft)					3-Grour 1.00	ndDis	stance	e(ft)			
SurfaceLegalLocation UL-A, Sec 26, T-17-S,R-35-E		Lat/LongD			atum				Latitude(°) 32° 48' 35.1" N			"	Longitude(°) 103° 25' 8.868" W			
DirectionsTo Well										1						
Casing																
Run Date Casing Description 3/3/198120:00 Surface					Set De 368.	epth (ft 0	OD (8 5/		ID (in) 8.10			Wt (lb/ft) 24.00			Grade K-55	
	/18/1981 Production				Set De 4,82	epth(ft 8.0							. ()		ade -55	
Cement																
Description SurfaceCasing(Cement								ор [11.(epth(ft)	KB)		Bott 374	omDe	pth (ft	KB)
Description ProductionCasir	ngCement								ор [11.(epth(ft)	KB)			omDe 328.0		КВ)
Zones																
^{ZoneName} AZALEA∷STRA	WN							р Dep 538		tKB)			ttom 71 0	Depth	(ftKB)	
Tubing																
ItemDescription TubingTK99		OD (in) 2 7/8		ID (in) 2.44		Wt (lb/ 6.40		Gra J-5	55		4,4	gth(ft 04.3	31	Joints 143	11.0)
Tubing Subs 6', 8', 8' 2 7		OD (in) 2 7/8		ID (in) 2.44		6.50		J-5	Grade J-55		22.57		Joints 3	4,4	15.	
On-OffTool with 2.25 Baker F profile nipple		OD (in) 3.748	\ /		Wt (lb/ft) 0.00		ft)	Grade		2.15		Joints 1	Top (4,43			
		OD (in) 5 1/2		ID (in) 2.37		Wt (lb/ft) 0.00		Gra			Length(ft) Jo 4.25 1		Joints 1	Top (4,44		
OtherIn Hole				•												
			1/2 ID (i 4.8		, I .					` '			18/2009			
PlungerLift Sys		1														
Frequen¢PlungerT _y M	ake	Model			OD ((in) Ru	n Date	e C	omn	nent				Т	op (ft i	Btn

State: New Mexico County: Spud Date: 3/3/1981

Maverick Permian LLC EAST VACUUM GB-SA UNIT 2672-001H API# 30-025-27295


PROPOSED WBD 9/8/2025

MD

Surface Casing: 8-5/8" 24# K-55 Cmt w/ 400 sx to Surface

368'

Formation	Тор
T/Salt	1,707'
B/Salt	2,859'
Yates	2,980'
Seven Rivers	3,267'
Queen	3,830'
Grayburg	4,191'
San Andres	4,491'

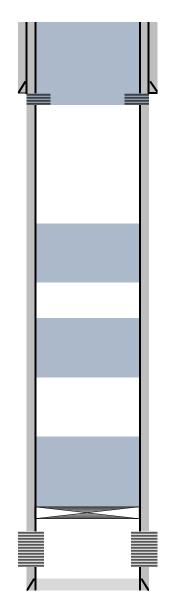

MD SURFACE PLUG Surf

> Perf 5-1/2" casing @ 418' Attempt sq. DO NOT exceed 500 psi. Squeeze 94 sx Class C cement at 418'. Circ cmt to surface and top fill.

418'

1,510' T.SALT PLUG

Spot 25 sx Class C cement at 1,757'. WOC 4 hrs. Tag and record plug depth.

1,757'

2,809' YATES & B.SALT PLUG

Spot 27 sx of Class C cement @ 3,030 WOC 4 hrs. Tag and record plug depth.

3,030

SAN ANDRES, GRAYBURG, QUEEN, & 7

RIVERS PLUG

Set CIBP @ 4,448' Run CBL from 4,488' to surface Spot 127 sx of Class C cement @ 4,448' WOC 4 hrs. Tag and record plug depth.

4,448'

San Andres Perforations 4,538'

4,538' - 4,710' 4,710'

4,784'

PBTD @ 4,784'

Production Casing: 5-1/2" 17# K-55 Cmt w/ 1160 sx to Surface

State of New Mexico Energy, Minerals and Natural Resources Department Oil Conservation Division Standard Plugging Conditions



This document provides OCD's general plugging conditions of approval. It should be noted that the list below may not cover special plugging programs in unique and unusual cases, and OCD expressly reserves the right to impose additional requirements to the extent dictated by project conditions. The OCD also reserves the right to approve deviations from the below conditions if field conditions warrant a change. A C-103F NOI to P&A must be approved prior to plugging operations. Failure to comply with the conditions attached to a plugging approval may result in a violation of 19.15.5.11 NMAC, which may result in enforcement actions, including but not limited to penalties and a requirement that the well be re-plugged as necessary.

- 1. Notify OCD office at least 24 hours before beginning work and seek prior approval to implementing any changes to the C-103 NOI to PA.
 - North Contact, Monica Kuehling, 505-320-0243, monica.kuehling@emnrd.nm.gov
 - South Contact, Gilbert Cordero, 575-626-0830, gilbert.cordero@emnrd.nm.gov
- A Cement Bond Log is required to ensure strata isolation of producing formations, protection of
 water and correlative rights. A CBL must be run or be on file that can be used to properly
 evaluate the cement behind the casing.

Note: Logs must be submitted to OCD via OCD permitting. A copy of the log may be emailed to OCD inspector for faster review times, but emailing does not relieve the operators obligation to submit through OCD permitting.

- 3. Once Plugging operations have commenced, the rig must not rig down until the well is fully plugged without OCD approval. If gap in plugging operations exceeds 30 days, the Operator must file a subsequent sundry of work performed and revised NOI for approval on work remaining. At no time shall the rig be removed from location if it will result in waste or contamination of fresh water.
- 4. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
- 5. Fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
 - North, water or mud laden fluids
 - South, mud laden fluids
- 6. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to an OCD permitted disposal facility.
- 7. Class of cement shall be used in accordance with the below table for depth allowed.

Class	TVD Lower Limit (feet)			
Class A/B	6,000			
Class I/II	6,000			
Class C or III	6,000			
Class G and H	8,000			
Class D	10,000			

Class E	14,000
Class F	16,000

- 8. After cutting the well head any "top off cement jobs" must remain static for 30 minutes. Any gas bubbles or flow during this 30 minutes shall be reported to the OCD for approval of next steps.
- 9. Trucking companies being used to haul oilfield waste fluids (Commercial or Private) to a disposal facility shall have an approved OCD C-133 permit.
 - A copy of this permit shall be available in each truck used to haul waste products.
 - It is the responsibility of the Operator and Contractor to verify that this permit is in place prior to performing work.
 - Drivers shall be able to produce a copy upon request of an OCD Compliance Officer.
- 10. Filing a [C-103] Sub. Plugging (C-103P) will serve as notification that the well has been plugged.
- 11. A [C-103] Sub. Release After P&A (C-103Q) shall be filed no later than a year after plugging and a site inspection by OCD Compliance officer to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to meet OCD standards before bonding can be released.
- 12. Produced water or brine-based fluids may not be used during any part of plugging operations without prior OCD approval.

13. Cementing;

- All cement plugs will be neat cement and a minimum of 100' in length. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
- If cement does not exist between or behind the casing strings at recommended formation depths, the casing perforations will be shot at 50' below the formation top and the cement retainer shall be set no more than 50' from the perforations.
- WOC (Wait on Cement) time will be:
 - o 4 hours for accelerated (calcium chloride) cement.
 - o 6 hours on regular cement.
- Operator must tag all cement plugs unless it meets the below condition.
 - The operator has a passing pressure test for the casing annulus and the plug is only an inside plug.
- If perforations are made operator must tag all plugs using the work string to tag unless given approval to tag with wireline by the correct contact from COA #1 of this document.
 - This includes plugs pumped underneath a cement retainer to ensure retainer seats properly after cement is pumped.
- Cement can only be bull-headed with specific prior approval.
- Squeeze pressures are not to exceed the exposed formations frac gradient or the burst pressure of the casing.
- 14. A cement plug is required to be set from 50' below to 50' above (straddling) formation tops, casing shoes, casing stubs, any attempted casing cut offs, anywhere the casing is perforated, DV tools.
 - Perforation/Formation top plug. (When there is less than 100ft between the top perforation to the formation top.) These plugs are required to be started no greater than

50ft from the top perforation. However, the plug should be set below the formation top or as close to the formation top as possible for the maximum isolation between the formations. The plug is required to be a 100ft cement plug plus excess.

- Perforation Plug when a formation top is not included. These plugs are required to be started within 50ft of the top perforation. The plug is required to be a 100ft cement plug plus excess.
- Cement caps on top of bridge plugs or cement retainers for perforation plugs, that are
 not straddling a formation top, may be set using a bailer with a minimum of 35' of
 cement in lieu of the 100' plug. The bridge plug or retainer must be set within 50ft of the
 perforations.
- Perforations are required below the surface casing shoe if cement does not exist behind
 the casing, a 30-minute minimum wait time will be required immediately after
 perforating to determine if gas and/or water flows are present. If flow is present, the
 well will be shut-in for a minimum of one hour and the pressure recorded. If gas is
 detected contact the OCD office for directions.
- 15. No more than 3000 feet is allowed between cement plugs in cased hole and no more than 2000 feet is allowed in open hole.
- 16. Formation Tops to be isolated with cement plugs, but not limited to are:
 - Northwest See Figure A
 - South (Artesia) See Figure B
 - Potash See Figure C
 - o In the R-111-P (Or as subsequently revised) Area a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, woe 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
 - South (Hobbs) See Figure D1 and D2
 - Areas not provided above will need to be reviewed with the OCD on a case by case basis.

17. Markers

• Dry hole marker requirements 19.15.25.10.

The operator shall mark the exact location of plugged and abandoned wells with a steel marker not less than four inches in diameter set in cement and extending at least four feet above mean ground level. The marker must include the below information:

- 1. Operator name
- 2. Lease name and well number
- 3. API number
- 4. Unit letter
- 5. Section, Township and Range
- AGRICULTURE (Below grade markers)

In Agricultural areas a request can be made for a below ground marker. For a below ground marker the operator must file their request on a C-103 notice of intent, and it must include the following;

- A) Aerial photo showing the agricultural area
- B) Request from the landowner for the below ground marker.

C) Subsequent plugging report for a well using a below ground marker must have an updated C-102 signed by a certified surveyor for SHL.

Note: A below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to OCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to OCD. OCD requires a current survey to verify the location of the below ground marker, however OCD will accept a GPS coordinate that were taken with a GPS that has an accuracy of within 15 feet.

18. If work has not commenced within 1 year of the approval of this procedure, the approval is automatically expired. After 1 year a new [C-103] NOI Plugging (C-103F) must be submitted and approved prior to work.

Figure A

North Formations to be isolated with cement plugs are:

- San Jose
- Nacimiento
- Ojo Alamo
- Kirtland
- Fruitland
- Picture Cliffs
- Chacra (if below the Chacra Line)
- Mesa Verde Group
- Mancos
- Gallup
- Basin Dakota (plugged at the top of the Graneros)
- Deeper formations will be reviewed on a case-by-case basis

Figure B

South (Artesia) Formations to be isolated with cement plugs are:

- Fusselman
- Montoya
- Devonian
- Morrow
- Strawn
- Atoka
- Permo-Penn
- Wolfcamp
- Bone Springs
- Delaware, in certain areas where the Delaware is subdivided into;
 - 1. Bell Canyon
 - 2. Cherry Canyon
 - 3. Brushy Canyon
- Any salt sections
- Abo
- Yeso
- Glorieta
- San Andres
- Greyburg
- Queen
- Yates

Figure D1 and D2

South (Hobbs) Formations to be isolated with cement plugs are:

The plugging requirements in the Hobbs Area are based on the well location within specific areas of the Area (See Figure D1). The Formations in the Hobbs Area to be isolated with cement plugs are (see Figure D2)

Figure D1 Map

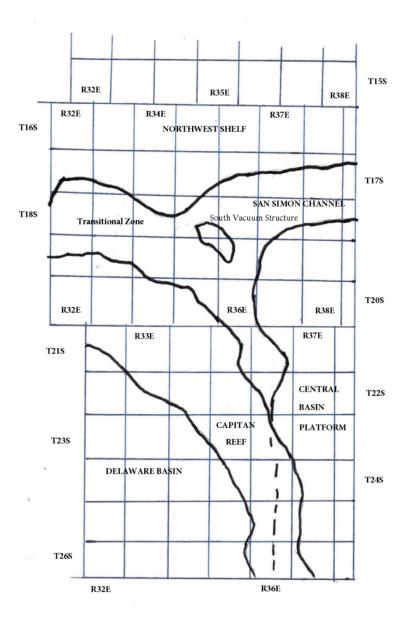


Figure D2 Formation Table

100' Plug to isolate upper and lower fresh water zones (typically 250' to 350')							
Northwest Shelf	Captan Reef Area	Transition Zone	San Simon Channel	South Vacuum Structure	Delaware Basin	Central Basin Platform	
Granit Wash (Detrital basement material and fractured pre-Cambrian basement rock)	Siluro-Devonian	Morrow	Siluro-Devonian	Ellenburger	Siluro-Devonian	Granit Wash (Detrital basement material, fractured pre-Cambrian basement rock and fractur Mafic Volcanic intrusives)	
Montoya	Mississippian	Atoka	Morrow	Mckee	Morrow	Ellenburger	
Fusselman	Morrow	Strawn	Wolfcamp	Siluro-Devonian	Atoka	Connell	
Woodford	Atoka	Cisco	Abo Reef	Woodford	Strawn	Waddell	
Siluro-Devonian	Strawn	Pennsylvanian	Bone Spring	Mississippian	Pennsylvanian	Mckee	
Chester	Pennsylvanian	Wolfcamp	Delaware	Barnett Shale	Lower Wolfcamp	Simpson Group	
Austin	Wolfcamp	Bone Spring	San Andres	Morrow	Upper Wolfcamp	Montoya	
Mississippian	Abo Reef, if present	Delaware	Queen	Atoka	Wolfcamp	Fusselman	
Morrow	Abo, if present	San Andres	Yates	Strawn	Third Bone Spring Sand (Top of Wolfbone)	Silurian	
Atoka	Queen, if present	Grayburg-San Andres	Base of Salt	Canyon	First Bone Spring Sand (Top of Lower Bone Spring)	Devonian	
Lower Pennsylvanian	Bone Spring	Queen	Rustler	Pennsylvanian	Bone Spring	Strawn	
Cisco-Canyon	Delaware	Seven Rivers		Blinebry	Brushy Canyon	Pennsylvanian	
Pennsylvanian	Base Capitan Reef	Yates		Bone Spring	Delaware (Base of Salt)	Wolfcamp	
Bough	Seven Rivers	Base of Salt		San Andres	Rustler	Abo	
Wolfcamp	Yates	Rustler		Queen		Abo Reef	
Abo	Top Capitan Reef			Base of Salt		Drinkard	
Abo Reef, if present	Base of Salt			Rustler		ТиЬЬ	
Yeso (Township 15 South to Township 17 South)	Rustler					Blinebry	
Drinkard or Lower Yeso (Township 15 South to Township 17 South)						Paddock	
Tubb (Township 15 South to Township 17 South)						Glorieta	
Blinebry (Township 15 South to Township 17 South)						San Andres	
Paddock (Township 15 South to Township 17 South)						Grayburg	
Glorieta						Grayburg-San Andres	
San Andres						Queen	
Queen (Township 15 South to Township 17 South)						Seven Rivers	
Seven Rivers (Township 15 South to Township 17 South)						Yates	
'ates (Township 15 South to Township 17 South)						Base of Salt	
Base of Salt						Rustler	
Rustler					1		

EXHIBIT "A" CASE 9316 ORDER **R-111-P**

CONSOLIDATED LAND **DESCRIPTION** OF THE KNOWN POTASH **LEASING AREA**, AS OF FEBRUARY **3**, **1988**

EDDY COUNTY, NEW MEXICO

TOWNSHIP 18 SOUTH, RANGE 30 EAST, NMPM

Section 10: SE/4 SE/4

Section 11: S/2 SW/4

Section 13: W/2 SW/4 and SE/4 SW/4
Section 14: W/2 NE/4, NW/4 and S/2

Section 15: E/2 NE/4, SE/4 SW/4 and SE/4 Section 22: N/2, N/2 SW/4, SE/4 SW/4 and SE/4

Section 23: Al

Section 24: N/2 NW/4, SW/4 NW/4 and NW/4 SW/4

Section 26: NE/4, N/2 NW/4 and SE/4 NW/4

Section 27: N/2 NE/4 and NE/4 NW/4

TOWNSHIP 19 SOUTH, RANGE 29 EAST, NMPM

Section 11: SE/4 SE/4

Section 12: SE/4 NE/4 and S/2

Section 13: Al

Section 14: NE/4, SE/4 NW/4 and S/2

Section 15: SE/4 SE/4

Section 22: NE/4, E/2 W/2 and SE/4

Section 23: All Section 24: All

Section 25: NW/4 NW/4

Section 26: N/2 NE/4 AND NW/4 Section 27: NE/4 AND E/2 NW/4

TOWNSHIP 19 SOUTH, RANGE 30 EAST, NMPM

Section 2:SW/4

Section 3: W/2 SW/4, SE/4 SW/4, S/2 SE/4 and

NE/4 SE/4

Section 4: Lots 3 and 4. SW/4 NE/4, S/2 NW/4

and S/2

Section 5: Lots 1, 2, and 3, S/2 NE/4,

S/2 NW/4 and S/2

Section 6: S/2 SE/4 and NE/4 SE/4

Sections 7 to 10 inclusive

Section 11: S/2 NE/4, NW/4 NW/4 and S/2

Section 12: NE/4, S/2 NW/4 and S/2

Section 13: NE/4, W/2, N/2 SE/4 and SW/4 SE/4

Sections 14 to 18 inclusive

Section 19: Lots 1, 2, and 3, NE/4, E/2 NW/4,

NE/4 SW/4, E/2 SE/4 and

Released to Imaging: 9/12/2025 1:46:44 PM

NW/4 SE/4

Sections 20 to 23 inclusive

Received by OCD: 9/9/2025 3:40:52 PM

-2-EXHIBIT "A" con'd

Section 25: NW/4 NW/4

Section 26: NE/4 NE/4, W/2 NE/4, W/2, W/2 SE/4

and SE/4 SE/4

Section 27: Al1 Section 28: AI1

Section 29: E/2, E/2 NW/4 and NW/4 NW/4

E/2 and SE/4 SW/4 Sect ion 32:

Section 33 to 35 inclusive

Section 36: NW/4 NW/4, S/2 NW/4 and S/2

TOWNSHIP 19 SOUTH, RANGE 31 EAST, NMPM

Section 7: Lots 1, 2, and 3 and E/2 NW/4

Section 18:

Lots 1, 2, and 3 and SW/4 NE/4, E/2 NW/4 and NE/4 SW/4

Section 31: Lot 4 Section 34: SE/4 SE/4

Section 35: S/2 SW/4 and SW/4 SE/4

Section 36: S/2 SE/4

LEA COUNTY, NEW MEXICO

TOWNSHIP 19 SOUTH, RANGE 32 EAST, NMPM

Section 31: Lot 4

Section 33: Lots 1 to 4 inclusive and N/2 S/2 Section 34: Lots 1 to 4 inclusive and N/2 S/2 Section 35: Lots 1 to 4 inclusive and N/2 S/2 Section 36: Lots 1 to 4 inclusive, SE/4 NE/4,

NW/4 SW/4 and NE/4 SE/4

TOWNSHIP 19 SOUTH, RANGE 33 EAST, NMPM

Section 22: SE/4 NE/4, E/2 SW/4 and SE/4 Section 23: S/2 NW/4, SW/4. W/2 SE/4 and

SE/4 SE/4

Section 25: SW/4 NW/4, W/2 SW/4 and SE/4 SW/4

Section 26: All Section 27: All

Section 28: S/2 SE/4 and NE/4 SE/4

Section 30: Lots 2 to 4 inclusive, S/2 NE/4,

SE/4 NW/4. E/2 SW/4 and SE/4

Section 31: All

Section 32: NE/4, S/2 NW/4 and S/2

Sections 33 to 35 inclusive

Section 36: W/2 NE/4, SE/4 NE/4, NW/4 and S/2

TOWNSHIP 19 SOUTH, RANGE 34 EAST, NMPM

Section 31 Lots 3 and 4

Released to Imaging: 9/12/2025 1:46:44 PM

-3-EXHIBIT "A" con'd

EDDY COUNTY, NEW MEXICO

TOWNSHIP 20 SOUTH, RANGE 29 EAST, NMPM

Section 1: SE/4 NE/4 and E/2 SE/4

Section 13: SW/4 NW/4, W/2 SW/4 AND SE/4 SW/4

Section 14:

NW/4 NE/4, S/2 NE/4, NW/4 and S/2

Section 14.

E/2 E/2, SE/4 SW/4 and W/2 SE/4

Section 22:

E/2 and E/2 NW/4

Section 23:

Section 24:

SW/4 NE/4, W/2, W/2 SE/4

and SE/4 SE/4

Section 25:

N/2, SW/4, W/2 SE/4 and NE/4 SE/4

Section 26:

All

ΑII

Section 27: Section 34: E/2 NE/4

Section 34: Section 35:

N/2

Section 36:

W/2 NE/4 AND NW/4

TOWNSHIP 20 SOUTH, RANGE 30 EAST, NMPM

Sections 1 to 4 inclusive

Section 5: Lots 1 to 3 inclusive, S/2 N/2

and S/2

Section 6 Lots 5, 6, and 7, S/2 NE/4, E/2 SW/4

and SE/4

Section 7 Lots 1 and 2. E/2 and E/2 NW/4

Sections 8 to 17 inclusive

Section 18

E/2

Section 19

E/2 and SE/4 SW/4

Sections 20 to 29 inclusive

Section 30:

Lots 1 to 3 inclusive, E/2 and

E/2 W/2

Section 31

E/4 and E/2 SE/4

Sections 32 to 35 inclusive

TOWNSHIP 20 SOUTH, RANGE 31 EAST, NMPM

Section 1 Lots 1 to 3 inclusive, S/2 N/2

and S/2

Section 2: All

Section 3:

Lots 1 and 2, S/2 NE/4 and SE/4

Section 6: Lots 4 to 7 inclusive, SE/4 NW/4,

E/2 SW/4, W/2 SE/4 and

SE/4 SE/4

Section 7: All

Section 8:

S/2 N/2 and S/2

Section 9: S/2 NW/4, SW/4, W/2 SE/4 and SE/4 SE/4

Section 10:

E/2 and SW/4

Section 11 to 36 inclusive

LEA COUNTY, NEW MEXICO

EXHIBIT "A" con'd

TOWNSHIP 20 SOUTH, RANGE 32 EAST, NMPM

Sections 1 to 4 inclusive Section 5: S/2 SE/4

Section 6: Lots 4 to 7 inclusive, SE/4 NW/4,

E/2 SW/4 and SW/4 SE/4

Sections 7 to 36 inclusive

TOWNSHIP 20 **SOUTH**, RANGE 33 EAST, NMPM Sections 1 to 36 inclusive

TOWNSHIP 20 SOUTH, RANGE 34 EAST, NMPM

Section 6: Lots 3 to 7 inclusive, SE/4 NEW/4,

E/2SW/4, W/2 SE/4 AND

SE/4 SE/4

Section 7: All

Section 8: SW/4, S/2 NW/4, W/2 SE/4 and

SE/4 SE/4

Section 16:

W/2 NW/4, SE/4 NW/4, SW/4 and

S/2 SE/4

Sections 17 to 21 inclusive

Section 22:

N/2 NW/4, SW/4 NW/4, W/2 SE/4,

and SE/4 SE/4

Section 26:

SW/4, W/2 SE/4 and SE/4 SE/4

Sections 27 to 35 inclusive

Section 36:

SW/4 NW/4 and W/2 SW/4

EDDY COUNTY, NEW MEXICO

TOWNSHIP 21 SOUTH, RANGE 29 EAST, NMPM

Sections 1 to 3 inclusive

Section 4: Lots 1 through 16, NE/4 SW/4 and

SE/4

Section 5: Lot 1

Section 10:

N/2 NE/4, SE/4 NE/4 and SE/4 SE/4

Sections 11 to 14 inclusive

Section 15:

E/2 NE/4 and NE/4 SE/4

Section 23:

N/2 NE/4

Section 24:

E/2, N/2NW/4 and SE/4NW/4

Section 25:

NE/4 NE/4 and S/2 SE/4

Section 35:

Lots 2 to 4 inclusive, S/2 NE/4.

NE/4 SW/4 and N/2 SE/4

Section 36:

Lots 1 to 4 inclusive, NE/4,

E/2 NW/4 AND N/2 S/2

TOWNSHIP 21 SOUTH, RANGE 30 EAST, NMPM

Sections 1 to 36 inclusive

-5-**EXHIBIT** "A" CON'D

TOWNSHIP 21 SOUTH, RANGE 31 EAST, NMPM

Sections 1 to 36 inclusive

LEA COUNTY, NEW MEXICO

TOWNSHIP 21 SOUTH, RANGE 32 EAST, NMPM

Sections 1 to 27 inclusive

Section 28:

N/2 and N/2 S/2

Sections 29 to 31 inclusive

Section 32:

NW/4 NE/4, NW/4 and NW/4 SW/4

Section 34:

N/2 NE/4

Section 35:

N/2 N/2

Section 36:

E/2, N/2 NW/4, SE/4 NW/4 and

NE/4 SW/4

TOWNSHIP 21 SOUTH, RANGE 33 EAST, NMPM

Section 1:

Lots 2 to 7 inclusive, Lots 10

to 14 inclusive, N/2 SW/4 and

SW/4 SW/4

Sections 2 to 11 inclusive

Section 12:

NW/4 NW/4 and SW/4 SW/4

Section 13:

N/2 NW/4, S/2 N/2 and S/2

Sections 14 to 24 inclusive

Section 25:

N/2. SW/4 and W/2 SE/4

Sections 26 to 30 inclusive

Section 31:

Lots 1 to 4 inclusive, NE/4,

E/2 W/2, N/2 SE/4 and

SW/4 SE/4

Section 32:

N/2 and NW/4 SW/4

Section 33:

N/2

Section 34:

NE/4, N/2 NW/4 and E/2 SE/4

Section 35:

ΔΙΙ

Section 36:

W/2 NE/4, NW/4 and S/2

TOWNSHIP 21 SOUTH, RANGE 34 EAST, NMPM

Section 17: W/2 Section 18: All

Section 19:

Lots 1 to 4 inclusive, NE/4,

E/2 W/2, N/2 SE/4 and

SW/4 SE/4

Section 20:

NW/4 NW/4

Section 30:

Lots 1 and 2 and NE/4 NW/4

Section 31:

Lots 3 and 4

EDDY COUNTY, NEW MEXICO

TOWNSHIP 22 SOUTH, RANGE 28 EAST, NMPM

Section 36: E/2 E/2

-6-EXHIBIT "A" con'd

TOWNSHIP 22 SOUTH, RANGE 29 EAST, NMPM

Sections 1 and 2 inclusive

Section 3 SE/4 SW/4 and SE/4

Section 9 S/2 NE/4 and S/2 Sections **10** to 16 inclusive

Section 17 S/2 SE/4

Section 19 SE/4 NE/4 and E/2 SE/4

Sections 20 to 28 inclusive

Section 29 N/2 N/2, S/2 NE/4 and SE/4

Section 30 NE/4 NE/4

Section 31 Lots 1 to 4 inclusive, S/2 NE/4,

E/2 W/2 and SE/4

Sections 32 to 36 inclusive

TOWNSHIP 22 SOUTH, RANGE 30 EAST, NMPM

Sections 1 to 36 inclusive

TOWNSHIP 22 SOUTH, RANGE 31 EAST, NMPM

Sections 1 to 11 inclusive

Section 12: NW/4 NE/4, NW/4 and NW/4 SW/4

Section 13: S/2 NW/4 and SW/4

Sections 14 through 23 inclusive

Section 24: W/2

Section 25: NW/4

Section 26: NE/4 AND N/2 NW/4

Sections 27 to 34 inclusive

LEA COUNTY, NEW MEXICO

TOWNSHIP 22 SOUTH, RANGE 32 EAST, NMPM

Section 1: Lot 1

Section 6: Lots 2 to 7 inclusive and SE/4 NW/4

TOWNSHIP 22 SOUTH, RANGE 33 EAST NMPM

Section 1: Lots 1 to 4 inclusive, S/2 N/2 and

N/2 S/2

Section 2:All

Section 3:Lot 1, SE/4 NE/4 and SE/4

Section 6: Lot 4

Section 10:

NE/4

Section 11:

NW/4 NE/4 AND NW/4

TOWNSHIP 22 SOUTH, RANGE 34 EAST NMPM

Section 6: Lots 4 to 6 inclusive

-7-EXHIBIT "A" **con'd**

EDDY COUNTY, NEW MEXICO

TOWNSHIP 23 SOUTH, RANGE 28 EAST, NMPM

Section 1: Lot 1

TOWNSHIP 23 SOUTH, RANGE 29 EAST, NMPM

Sections 1 to 5 inclusive

Section 6:

Lots 1 to 6 inclusive, S/2 NE/4,

SE/4 NW/4. E/2 SW/4 and SE/4

Section 7: NE/4 and NE/4 NW/4

Section 8: N/2, N/2 SW/4, SE/4 SW/4 and SE/4

Sections 9 to 16 inclusive

Section 17: NE/4 and E/2 SE/4

Sections 21 to 23 inclusive

Section 24: N/2, SW/4 and N/2 SE/4 Section 25: W/2 NW/4 and NW/4 SW/4

Section 26: All Section 27: All

Section 28: N/2, N/2 SW/4, SE/4 SW/4 and SE/4

Section 33: N/2 NE/4 and NE/4 NW/4 Section 34: NE/4, E/2 NW/4, NW/4 NW/4,

NE/4 SW/4 and SE/4

Section 35: ΑII

Section 36: W/2 NE/4, NW/4 and N/2 SW/4

TOWNSHIP 23 SOUTH, RANGE 30 EAST, NMPM

Sections 1 to 18 inclusive

Section 19 N/2, N/2 SW/4, SE/4 SW/4 and SE/4

Section 20 All Section 21 All

N/2, S/2 SW/4, N/2 S/2 and SE/4 SE/4 Section 22

Sections 23 to 25 inclusive

E/2, SE/4 NW/4 and SW/4 Section 26

Section 27 N/2 NW/4, SW/4 NW/4, SE/4 SW/4,

S/2 SE/4 and NE/4 SE/4

Section 28 N/2 and SW/4 Sect ion 29 N/2 and SE/4

Section 30 N/2 NE/4 Section 32 N/2 NE/4

Section 33 SE/4 NE/4, N/2 NW/4, NE/4 SE/4

and S/2 SE/4

Sections 34 to 36 inclusive

TOWNSHIP 23 SOUTH, RANGE 31 EAST, NMPM

Section 2: Lot 4, SW/4 NW/4 and W/2 SE/4

Sections 3 to 7 inclusive

Section 8: NE/4 NE/4, W/2 NE/4 and W/2

Section 9:

N/2 N/2 NW/4 NW/4 and SE/4 SE/4

Section 11: S/2 NE/4, S/2 SW/4 and SE/4

Section 10:

Received by OCD: 9/9/2025 3:40:52 PM

Section 12:

SW/4 NW/4 and SW/4

Section 13:

SW/4 NE/4, W/2 and W/2 SE/4

Section 14:

Section 15:

E/2, SE/4 NW/4 and SW/4

Section 16:

SW/4 and S/2 SE/4

Section 17:

NW/4 and S/2

Sections 18 to 23 inclusive Section 24:

W/2 NE/4 and W/2

Section 25:

W/2 NE/4, NW/4, N/2 SW/4 and

NW/4 SE/4

Section 26 to 34 inclusive

Section 35:

N/2 NW/4 and SW/4 NW/4

TOWNSHIP 24 SOUTH, RANGE 29 EAST, NMPM

Section 2: Lots 2 to 4 inclusive

Section 3:Lot 1

TOWNSHIP 24 SOUTH, RANGE 30 EAST, NMPM

Section 1:

Lots 1 to 4 inclusive, S/2 N/2, SW/4 and NW/4 SE/4

Section 2:

All All

Section 3:

Section 4: Lots 1 and 2, S/2 NE/4, SE/4 NW/4,

SW/4 SW/4. E/2 SW/4 and SE/4

Section 9:

N/2, N/2 SW/4, SE/4 SW/4 and SE/4

Section 10:

All

Section 11:

ΑII W/2 NW/4 and NW/4 SW/4

Section 12: Section 14:

W/2 NE/4 and NW/4

Section 15:

NE/4 and N/2 NW/4

TOWNSHIP 24 SOUTH, RANGE 31 EAST, NMPM

Section 3:

Lots 2 to 4 inclusive, SW/4 NE/4,

S/2 NW/4, SW/4 and W/2 SE/4

Section 4:

All

Section 5:

Lots 1 to 4 inclusive, S/2 N/2,

N/2 S/2 and SE/4 SE/4

Section 6:

Lots 1 to 6 inclusive, S/2 NE/4, SE/4 NW/4, NE/4 SW/4 and

N/2 SE/4

Section 9:

E/2 and NW/4

Section 10:

W/2 NE/4 and W/2

Section 35:

Lots 1 to 4 inclusive, S/2 N/2 and

N/2 S/2

Section 36:

Lots 1 and 2, SW/4 NW/4 and N/2 SW/4

TOWNSHIP 25 SOUTH, RANGE 31 EAST, NMPM

Section 1:

Lots 3 and 4 and S/2 NW/4

Section 2:

Lots 1 to 4 inclusive and S/2 N/2

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 504547

CONDITIONS

Operator:	OGRID:
Maverick Permian LLC	331199
1000 Main Street, Suite 2900	Action Number:
Houston, TX 77002	504547
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By		Condition Date
gcordero	A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	9/12/2025
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	9/12/2025