

Submit 3 Copies To Appropriate District

Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

811 South First, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.
30-025-28480

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

018031

7. Lease Name or Unit Agreement Name:

San Simon 5 St

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☒ Other

2. Name of Operator Greka Energy

Saba Energy of TX Inc

3. Address of Operator Greka Energy, Suite 220, Houston, Tx 77042

3000 Wilcrest

8. Well No.

2

9. Pool name or Wildcat
San Simon Wolfcamp

4. Well Location

Unit Letter E/G : 1980 feet from the N line and 1980 feet from the E line

Section 5 Township 22S Range 35E NMPM County Lea

10. Elevation (Show whether DR, RKB, RT, GR, etc.)
3631 (GL)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

See attached well bore schematic.

Attempt to sting out of pkr. If unsuccessful will cut tbg @ ~11550'.

Pump 25sx cmt plug @ 7' csg shoe @ 10975'. (10674' - 11070')

Pump 25sx cmt plug @ 7950' in cased hole.

Pump 25sx cmt plug @ 9 5/8" csg shoe @ 5750'. (5597' - 5800')

Cut 7" csg @ TOC, ~5200'. POH csg. Pump 25sx cmt plug @ stub. (5097' - 5200')

Pump 25sx cmt plug @ 1800' @ salt zone.

Pump 25sx cmt plug @ 13 3/8" csg shoe @ 1075'. (1022' - 1125')

Pump 13sx cmt plug @ surf. (0' - 60')

Cut off wellhead and install deadman marker

WELL MUST BE IN COMPLIANCE
WITH RULE 202 BY

4/15/02

I hereby certify that the information above

SIGNATURE

[Signature]

TITLE

PROD FOREMAN

DATE 2-2-02

Type or print name Tracy Headstream

Telephone No. (505) 390-7462

(This space for State use)

APPROVED BY

ORIGINAL SIGNED BY

THOMAS WILLIAMS

DATE

Conditions of approval, if any:

CC DISTRICT SUPERVISOR/GENERAL MANAGER

THE COMMISSION MUST BE NOTIFIED 24
HOURS PRIOR TO THE BEGINNING OF
PLUGGING OPERATIONS FOR THE CLOSING
TO BE APPROVED.

Before the OCD
Case 13363
OCD Ex. 21

FEB 12 2002

[Signature]

PLUGGING & ABANDONMENT WORKSHEET (3 STRING CSNG)

OPERATOR GRETA ENERGY
LEASENAME SAN SIMON 5 ST


SECT 5 TWN 22S RNG 35E
FROM 1980 NSL 1980 EWL
TD: 13250 FORMATION @ TD
PBTD: 13210 FORMATION @ PBTD

	SIZE	SET @	TOC	TOC DETERMINED BY	
SURFACE	13 3/8	1075	SURF	CIRC	
INTMED 1	9 5/8	5750	SURF	CIRC	
INTMED 2					
PROD	7	10975	5200	CALC	
	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1	4 1/2	10688	13247	10688	CALC
LINER 2					
	CUT & PULL @			TOP - BOTTOM	
INTMED 1			PERFS	11073 - 11742	
INTMED 2			OPENHOLE	0 -	
PROD	7" @ 5200'				

* REQUIRED PLUGS DISTRICT I

MUTLER (ANYTD)	*
YATES	
QUEEN	
GRAYBRO	
SAN ANDREW	
CAPTAIN REEF	*
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BERRY CANYON	
SOME SPRING	
OLORIETA	*
BLINNEY	
TUBB	
ORDKARD	
ABO	
WC	
PENN	
STRAWN	
ATOKA	
SACROW	
SON	
DEVONIAN	

PLUG	TYPE PLUG	SACKS CMNT	DEPTH
EXAMPLES			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700'-8800'
PLUG #3	CIRP/35'		5300'
PLUG #4	CIRP	25 SXS	5300'
PLUG #5	STUB	50 SXS	4600'-4700'
PLUG #6	REINR SOZ	200 SXS	400
PLUG #7	SURF	10 SXS	0-10'
PLUG #1	SHOE	25 SXS	10674'-11070'
PLUG #2	CH	25 SXS	7950'
PLUG #3	SHOE	25 SXS	5597'-5800'
PLUG #4	STUB	25 SXS	5097'-5200'
PLUG #5	SALT	25 SXS	1800'
PLUG #6	SHOE	25 SXS	1022'-1125'
PLUG #7	SURF	131Y	0-60
PLUG #8			
PLUG #9			
PLUG #10			
PLUG #			
PLUG #			

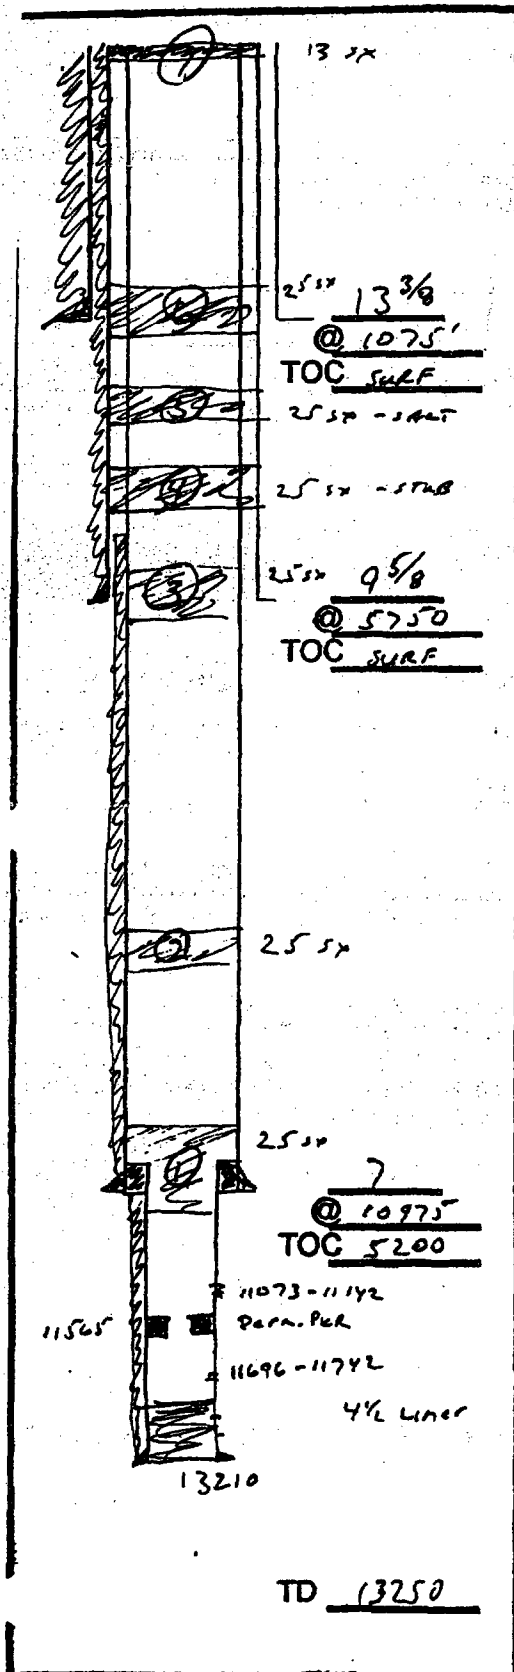

SAN SIMON 5 ST #2
 Sec 5, T22S, R35E
 Lea County, NM

Proposed

KB: 20'
 GL: 3621'

13 3/8" 61# K-55 @ 1075'
 cmt'd w/965 sx CI C to surf

9 5/8" 36# & 40# K-55 @ 5750'
 cmt'd w/3350 sx Line & CI C to surf

2 3/8" 4.7# L-80 U NuLok & N-80 EUE tbg
 w/Otis Perma-Lach pkr & nipples @ 11600'

7" 23# S-95 @ 10975'
 cmt'd w/700 sx Line & CI H

Perfs: 11073-142' (Wolfcamp)

Perfs: 11696-742' (Strawn)

Perfs: 12758-946' (Morrow) squeezed

4 1/2" 13.5# N-80 @ 13247' (top @ 10688') cmt'd w/475 sx CI H

FBR @ 10673'

Otis Perma-lach pkr @ 11580'

11565

50 sx squeeze TOC @ 12500'

PBTD: 13210'

TD: 13250'

"X" nipple @ 11579

11/5/94
 2 S P F