

R 7 W

R 6 W

Salazar & Std. of Tex.	Killarney	1-19  REESE LYBROOK	Superior
24	Reese & Std. of Tex.	19	20
1-24  KILLARNEY BROWN			
Reese & Standard of Texas	Donosky & Standard of Texas	30	Skelly
25		1-30  REESE SPERLING	29
P. W. Warner	H. R. Shaffer	Reese & Standard of Texas	Nat'. Coop. & Ref. Assoc.
	C. B. Gonzales		
Grace Hoxey		31	32
36			
Tennessee Gas Trans.			

T
24
N

LOCATION AND OWNERSHIP PLAT FOR
WELL 1-30 IN SECTION 30 OF
T 24 N AND R 6 W

Docket No. 6-60
Case No. 1908
Reese Exhibit No. 1

BEFORE EXAMINER UTZ
C.L. CONSERVATION COMMISSION
EXHIBIT NO. 1
CASE NO. 1908

VAL R. REESE AND ASSOCIATES INC.
LOBBY OF SIMMS BLDG.
ALBUQUERQUE, NEW MEXICO

APPLICATION FOR DUAL GAS-OIL COMPLETION
OF WELL # 1-30 IN GALLUP AND DAKOTA
FORMATIONS

RIO ARriba COUNTY
NEW MEXICO

Drawn: W. H. McGahey
Approved: J. Jacobs

Scale: 1" = 3000'
Date:

SCHLUMBERGER WELL SURVEYING CORPORATION

HOUSTON, TEXAS



Induction-Electrical Log

COUNTY <u>RIO ARriba, NEW MEXICO</u> FIELD or LOCATION <u>WILDCAT</u> WELL <u>SPERLING #1-30</u> COMPANY <u>VAL R. REESE & ASSOC INC.</u>	COMPANY <u>VAL R. REESE & ASSOCIATES INC.</u>	Other Surveys SGR
	WELL <u>SPERLING</u>	Location of Well
	<u>#1-30</u>	1850' FR S/L 790' FR E/L SEC. 30-24N-6W
	FIELD <u>WILDCAT</u>	Elevation: D.F.: 6671 K.B.: or G.L.: 6658
	LOCATION <u>SEC. 30-24N-6W</u>	FILING No. _____
	COUNTY <u>RIO ARriba</u>	
	STATE <u>NEW MEXICO</u>	

RUN No.	TWO				
Date	11-18-59				
First Reading	6524	Docket No. 6-60			
Last Reading	5170	Case No. 1908			
Feet Measured	1354	Reese Exhibit No. 2			
Csg. Schlum.	226				
Csg. Driller	230				
Depth Reached	6530				
Bottom Driller	6524				
Depth Datum	KB				
Mud Nat.	GEL CHEM				
Dens. Visc.	10.2 62				
Mud Resist.	2 @ 67°F	@ °F	@ °F	@ °F	@ °F
" Res. BHT	1.1 @ 128°F	@ °F	@ °F	@ °F	@ °F
Rmf	1.4 @ 128°F	@ °F	@ °F	@ °F	@ °F
Rmc	1.7 @ 128°F	@ °F	@ °F	@ °F	@ °F
" pH	9.5 @ °F	@ °F	@ °F	@ °F	@ °F
" Wtr. Loss	7 CC 30 min.	CC 30 min.	CC 30 min.	CC 30 min.	CC 30 min.
Bit Size	8 3/4"				
Spcgs.—AM	16"				
MN					
IND.	40"				
Opr. Rig Time	2 1/2 HOURS	BEFORE EXAMINER UTZ			
Truck No.	2515 FARM	CIL CONSERVATION COMMISSION			
Recorded By	BUTLER	Reese Exhibit No. 2			
Witness	MR. JAMESON	CASE NO. 1908			

10³/₄" O.D. 32.75 # H-40 Csg.
set at 230' RKB cemented
w/210 sx. to surface

M.V. & P.C.

Cement top from temperature
survey 4770'

TOP OF GALLUP 5277'
BASE OF GALLUP 5480'


Perforations:

4 per foot 5448'-5480'

2 per foot 5344'-~~5352'~~ 5358'

2 per foot 5280'-5316'

2³/₈" O.D. E.U.E. tubing set
at 5412

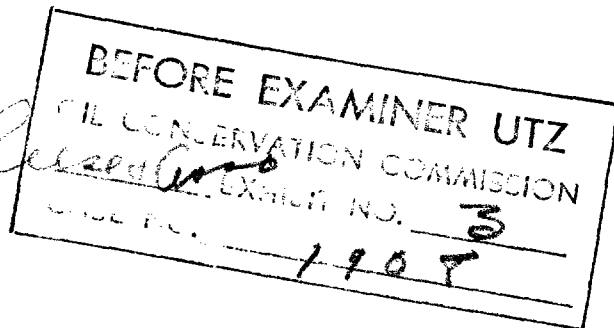

Baker Model "D" Production Packer
at 6370'

TOP OF DAKOTA 6282'

Perforations:

4 per foot 6430'-6454'

4 per foot 6402'-6408'

2 " O.D. E.U.E. tubing set
at 6407'

P.B.T.D. 6493' Larkin Fillrite
Float Collar

7" O.D. 26 # and 23 # J-55
Csg. set at 6524' cemented
w/300 sx. T.D. 6524'

DIAGRAMATIC SKETCH OF DUAL GAS-OIL
COMPLETION FOR WELL # 1-30

Docket No 6-60
Case No. 1908
Reese Exhibit # 3

VAL R. REESE AND ASSOCIATES INC.
LOBBY OF SIMMS BLDG.
ALBUQUERQUE, NEW MEXICO

APPLICATION FOR DUAL GAS-OIL COMPLETION
OF WELL # 1-30 IN GALLUP AND DAKOTA
FORMATIONS

RIO ARriba COUNTY
NEW MEXICO

Drawn: W.H. McGahey
Approved: J. Jacobs

Scale: 400' = 1"
Date: 12-31-59