


EUNICE SAN ANDRES, SOUTH
AUGUST, 1985 PRODUCTION

WELL NO.	OIL (BBL)	GAS (MCF)	GAS ALLOWABLE		OVERPRODUCTION AT 2000-to-1 GOR (MCF)
			5000 GOR	2000 GOR	
Hugh					
13	311	1563	12,400	4960	0
16	48	2209	12,400	4960	0
Lou Wortham					
5	505	4138	12,400	4960	0
6	278	7112	12,400	4960	2152
19	404	3154	12,400	4960	0
20	682	5325	12,400	4960	365
C-1	494	2170	12,400	4960	0
C-2	320	1406	12,400	4960	0
C-3	1688	7416	12,400	4960	2456
C-4	1789	7860	12,400	4960	2900



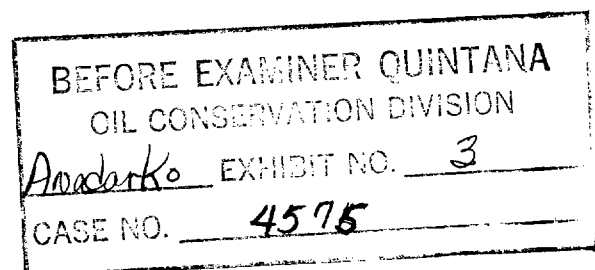

LEGEND

Wells above SAN ANDRES not spotted

● SAN ANDRES WELLS

● WELLS PRODUCING BELOW SAN ANDRES

BEFORE EXAMINER QUINTANA
OIL CONSERVATION DIVISION
Anadarko EXHIBIT NO. 4
CASE NO. 4575
R-37-E

Anadarko
Petroleum Corporation


SOUTH EUNICE
SAN ANDRES FIELD
INFILL DEVELOPMENT PROJECT
Lea Co., New Mexico

STRUCTURE MAP
TOP OF SAN ANDRES
C.I. = 20'

Interpretation By: R.A. ERICKSON & M. BRIDGES

Date: 10/85 Scale: 1" = 2000'

CASE NO. 4575

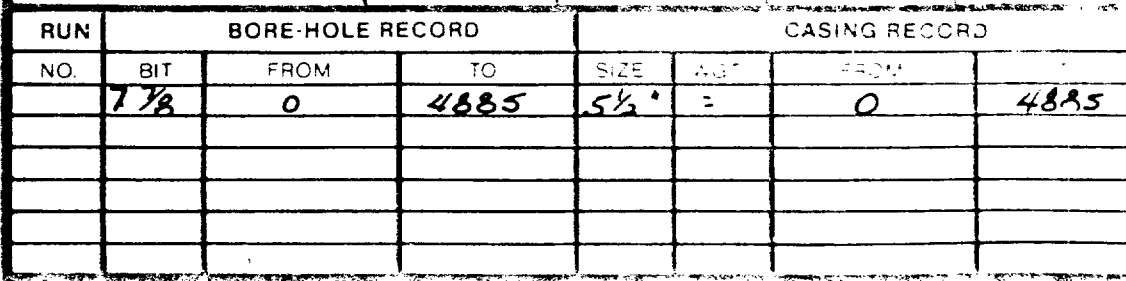

BEFORE EXAMINED BY STATE
OIL CONSERVATION DIVISION
Anadarko EXHIBIT NO. 6
CASE NO. 4575

Schumacher

**SIDEWALL
SECTION POROSITY**

COUNTY FIELD or LOCATION WELL COMPANY	COMPANY <u>ANADARKO PRODUCTION COMPANY</u>					
	WELL <u>LOW WORTHAM #6</u>					
	FIELD <u>S. EUNICE (SS)</u>					
	COUNTY <u>LEA</u> STATE <u>NEW MEXICO</u>					
Location: <u>2310' FNL + 32' FWL</u>						Other S FOC-68, L-9, M
Sec. <u>11</u> Twp. <u>22-S</u> R. <u>37-E</u>						
Permanent Datum: <u>G.L.</u> Elev.: <u>3370</u>						Elev.: K. D. G.
Log Measured From <u>K.B.</u> <u>11</u> Ft. <u>Above</u> Perm. Datum						
Drilling Measured From <u>K.B.</u>						
Date		<u>5-2-71</u>				
Run No.		<u>2NE</u>				
Type Log		<u>EPITHERMAL</u>				
Depth—Driller		<u>4812</u>				
Depth—Logger		<u>4817</u>				
Bottom logged interval		<u>4816</u>				
Top logged interval		<u>3200</u>				
Type fluid in hole		<u>SALT MUD</u>				
Salinity, PPM Cl.		<u>189,000</u>				
Density		<u>10.1</u>				
Level		<u>FULL</u>				
Max rec. temp., deg F.		<u>69.5</u>				
Operating rig time		<u>2 HR</u>				
Recorded by		<u>BROWN</u>				
Witnessed by		<u>NELSON</u>				
RUN		BORE-HOLE RECORD			CASING RECORD	
No.	Bit	From	To	Wgt.	From	
<u>1</u>	<u>7 7/8</u>	<u>1069</u>	<u>4812</u>	<u>0</u>	<u>0</u>	