


B.V. LYNCH "A", NO. 4  
1980' FNL & 660' FEL, SEC. 34, T20S, R34E  
Texaco, Inc.

PLUGGED AND ABANDONED 1-24-35

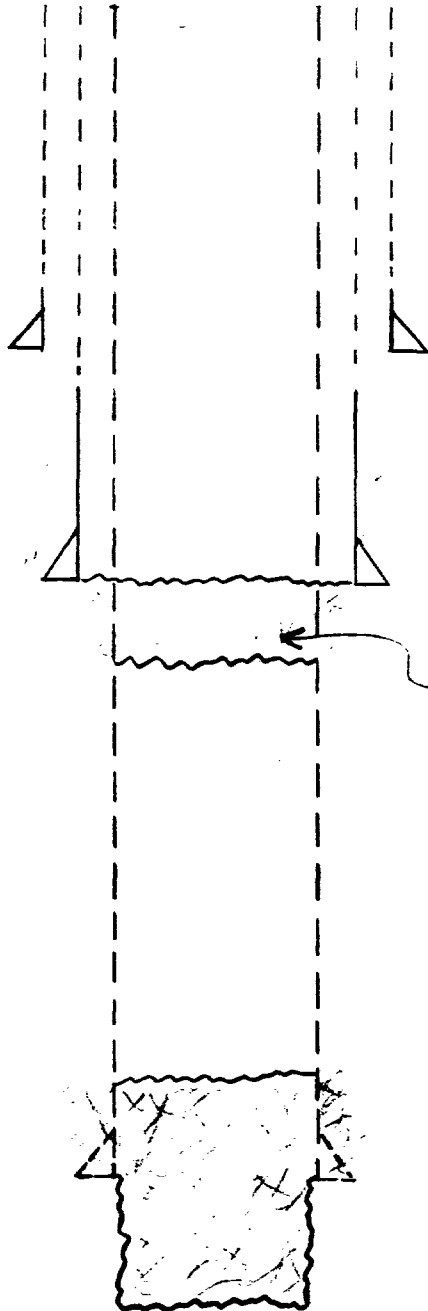

Mud @ 1636' - 0'

10" csg. @ 900' - Pulled 739', 161' In Hole

8 1/4" csg. @ 1636', Cemented w/ 75 sxs., Est. TOC @ 1509'

Pulled 1064' of 8-1/4" csg., 572' In Hole

Cement Plug @ 1700' - 1636'

Mud @ 3575' - 1700'

7" @ 3713', Pulled all 7" csg.

Cement Plug @ 3797' - 3575'

O.H. 3713' - 3797'

TD = 3797'


BEFORE EXAMINER STOGNER  
OIL CONSERVATION DIVISION

Exhibit EXHIBIT NO. 4

CASE NO. 8626

B.V. LYNCH "A", NO. 5  
660' FSL & 1980' FEL, SEC. 34, T20S, R34E  
Texaco, Inc.


PLUGGED AND ABANDONED 1-6-62

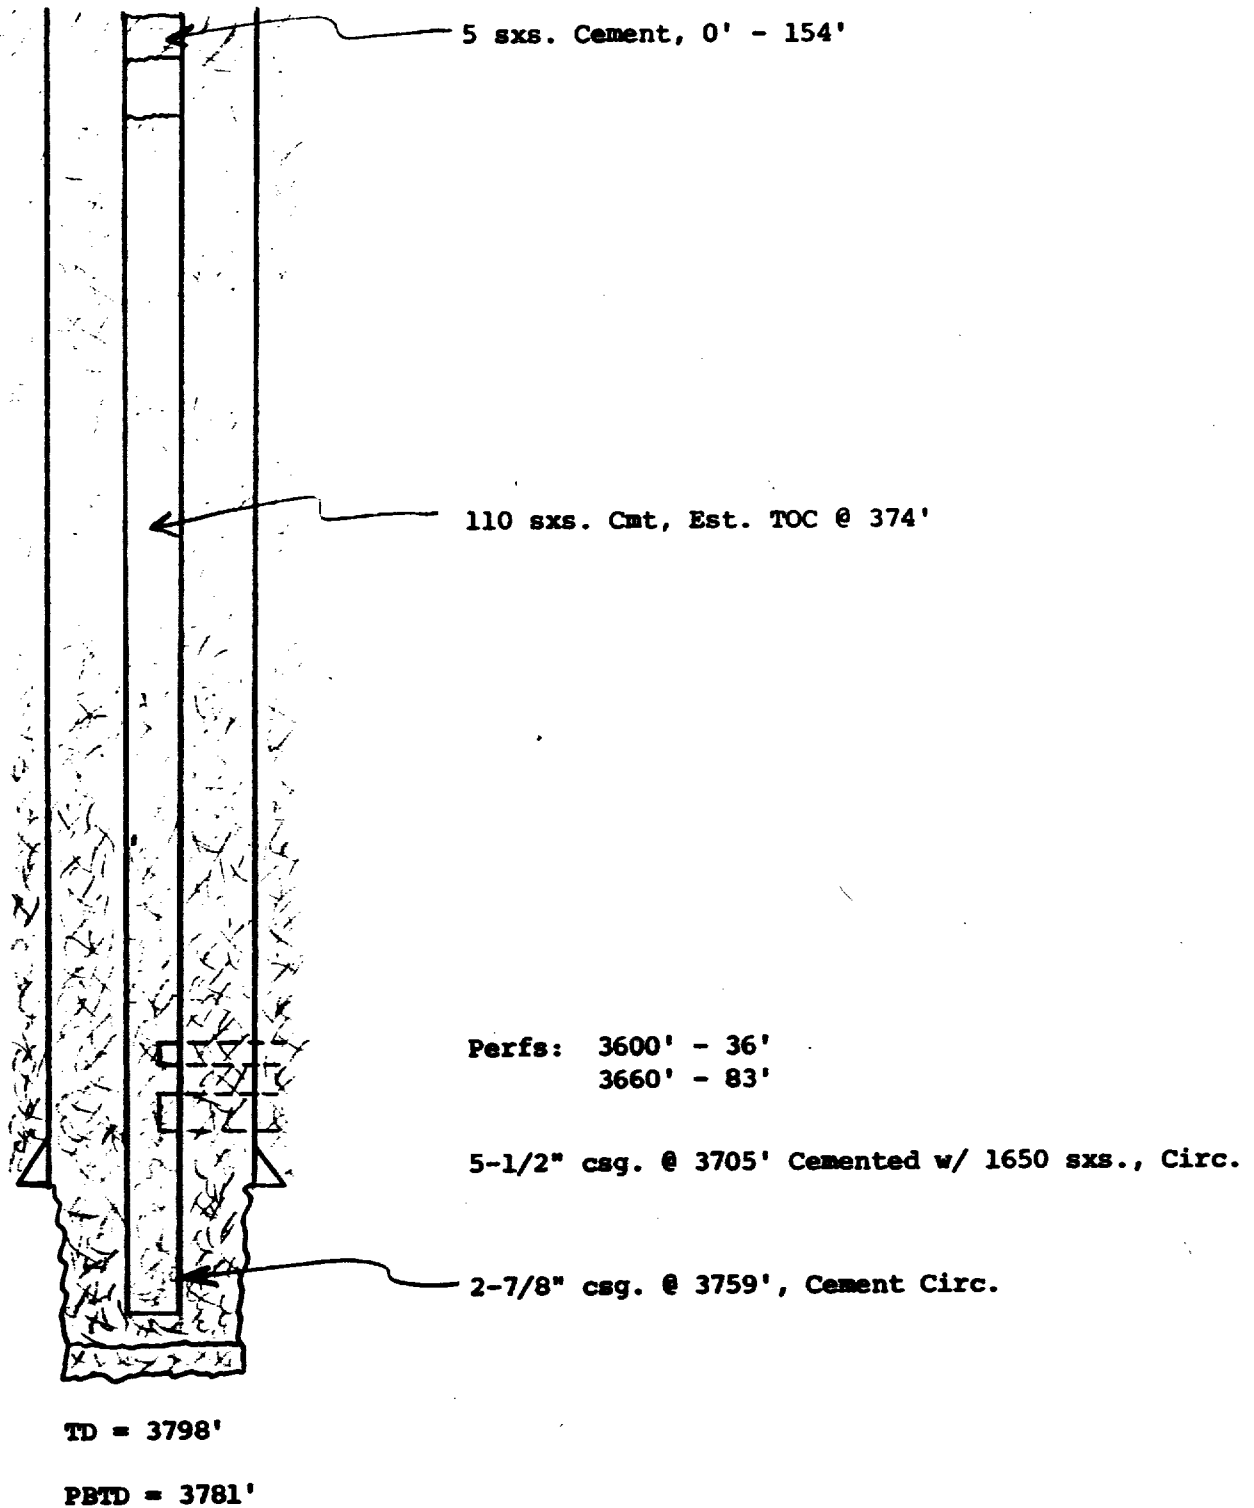

ROACH FED, NO. 1  
2310' FNL & 990' FEL, SEC. 34, T20S, R34E  
FEATHERSTONE - GALE


PLUGGED AND ABANDONED 12-3-60

(Revised 5/21/85)

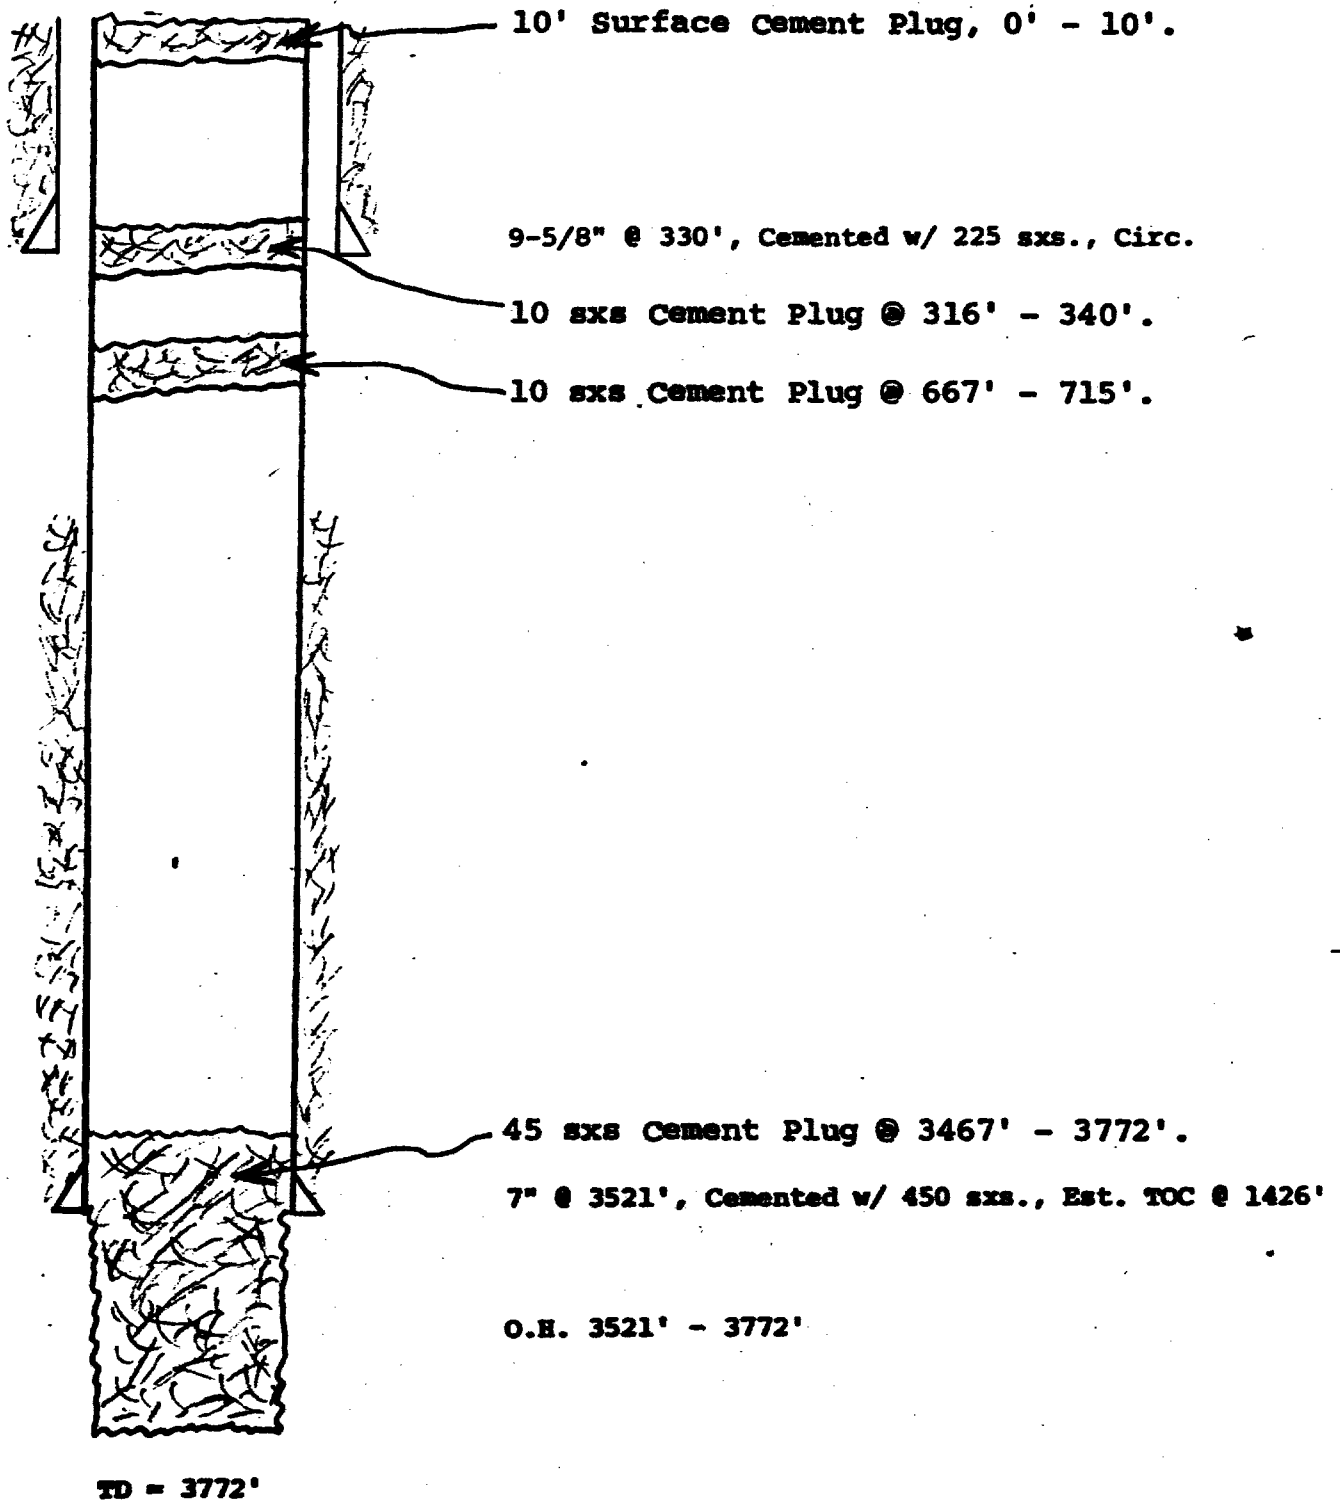

LEA STATE, NO. 6  
833' FEL & 660' FNL, SEC. 2, T21S, R33E  
EOB Energy Corp.

PLUGGED AND ABANDONED 10-77

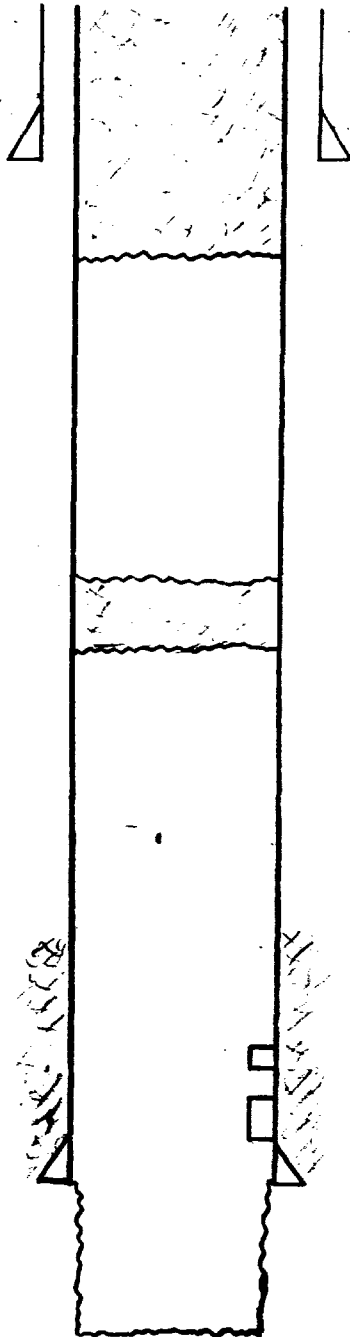

10-3/4" csg. @ 151', Cemented w/ 100 sxs., Circ.

Cement Plug @ 300' - 0'

Cement Plug @ 1595' - 1800'

Perfs: 3691' - 93'  
3705' - 12'


5-1/2" csg. @ 3713', Cemented w/ 100 sxs., Est.  
TOC @ 3225'

O.H. 3713' - 3779'

TD = 3779'

RALPH SHUGART, NO. 2  
990' FNL & 330' FWL, SEC. 1, T21S, R33E  
Paul H. Lavery

PLUGGED AND ABANDONED 3-21-60

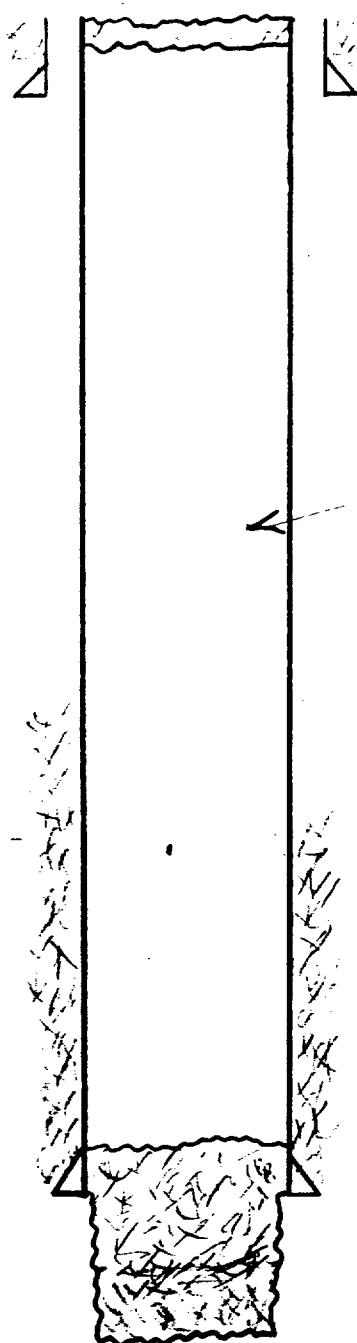

10 sxs. Cement Plug @ Surface

13-3/8" csg. @ 105', Cemented w/ 125 sxs.

Mud @ 3642' - 0'


5-1/2" csg. @ 3700', Cemented w/ 400 sxs., Est.  
TOC @ 2084'

Cement Plug @ 3763' - 3642'

TD = 3763'


RALPH SHUGART, NO. 4  
330' FNL & 330' FWL, SEC. 1, T21S, R33E  
Paul H. Lavery

PLUGGED AND ABANDONED 3-22-60

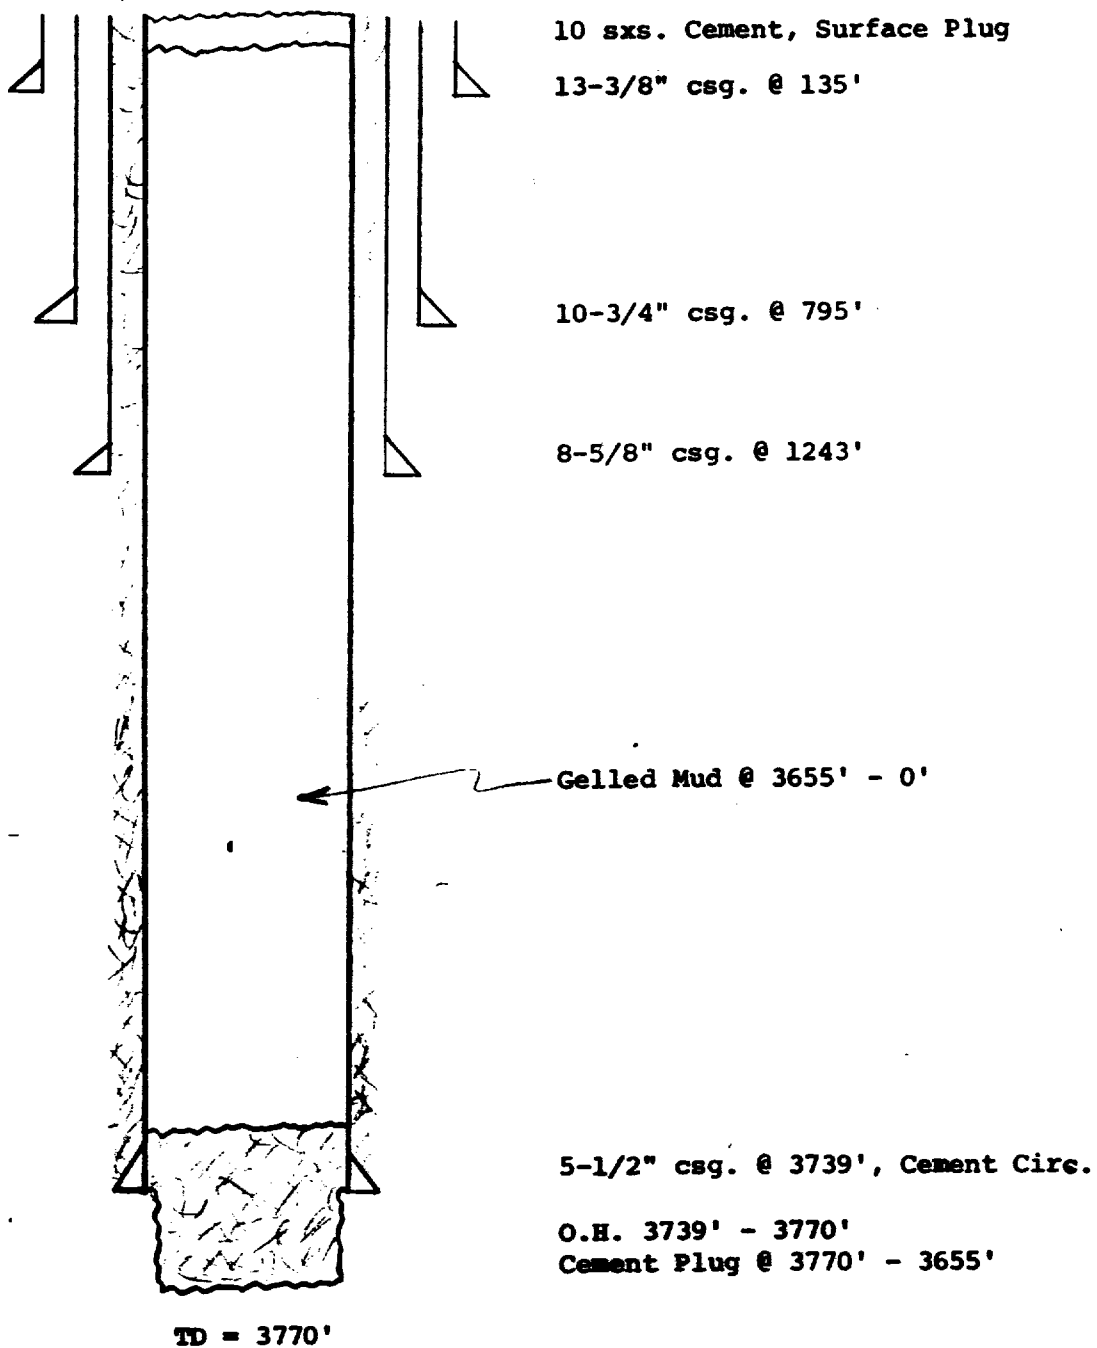

MOORE STATE, NO. 1  
1650' FNL & 2310' FWL, SEC. 2, T21S, R33E  
Mallard Petr., Inc.

PLUGGED AND AGANDONED 6-19-69

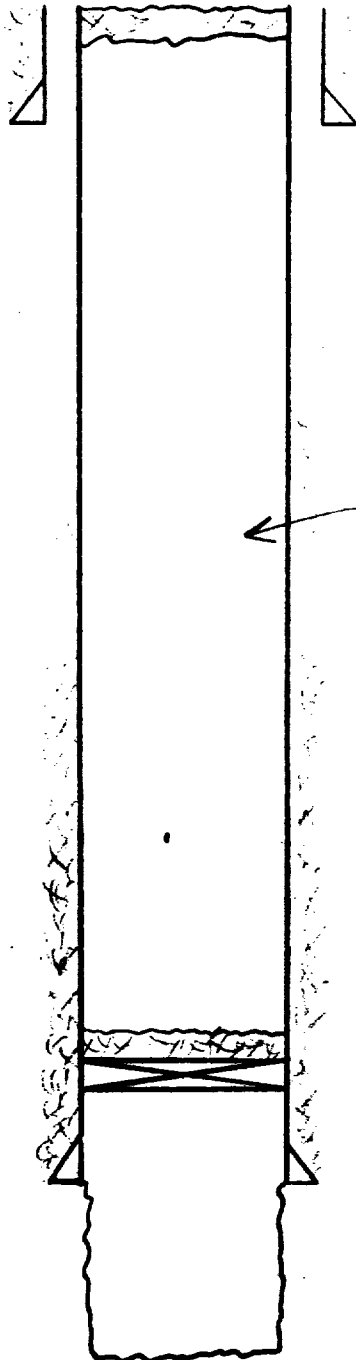

10 sxs. Cement Surface Plug

13-3/8" @ 155', Cemented w/ 125 sxs.

Mud

CIBP @ 3653' w/ 2 sxs. Cement on Top


5-1/2" csg. @ 3725', Cement w/ 400 sxs., TOC @ 1250'

O. H. @ 3725' - 3807'

TD = 3807'

MOORE STATE, NO. 2  
330' FNL & 2310' FWL, SEC. 2, T21S, R33E  
Mallard Petr., Inc.

PLUGGED AND ABANDONED 6-19-69

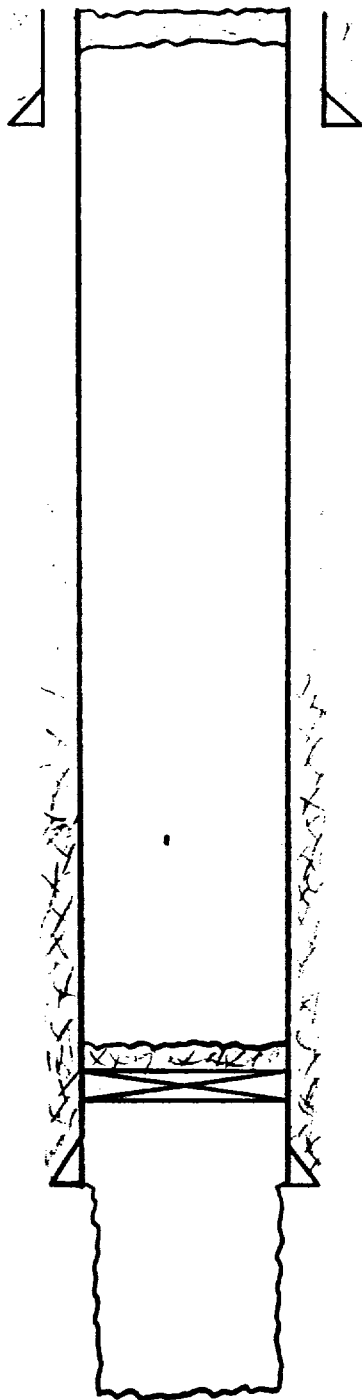

10 sxs. Cement Surface Plug

13-3/8" csg. @ 133', Cemented w/ 125 sxs.

CIBP @ 3634' w/ 2 sxs Cement on Top


5-1/2" csg. @ 3706', Cemented w/ 400 sxs., Est.  
TOC @ 2090'

O.H. 3706' - 3780'

TD = 3780'

LEA STATE, NO. 5  
990' FNL & 330' FEL, SEC. 2, T21S, R33E  
B. N. Muncy, Jr.

PLUGGED AND ABANDONED 10-77

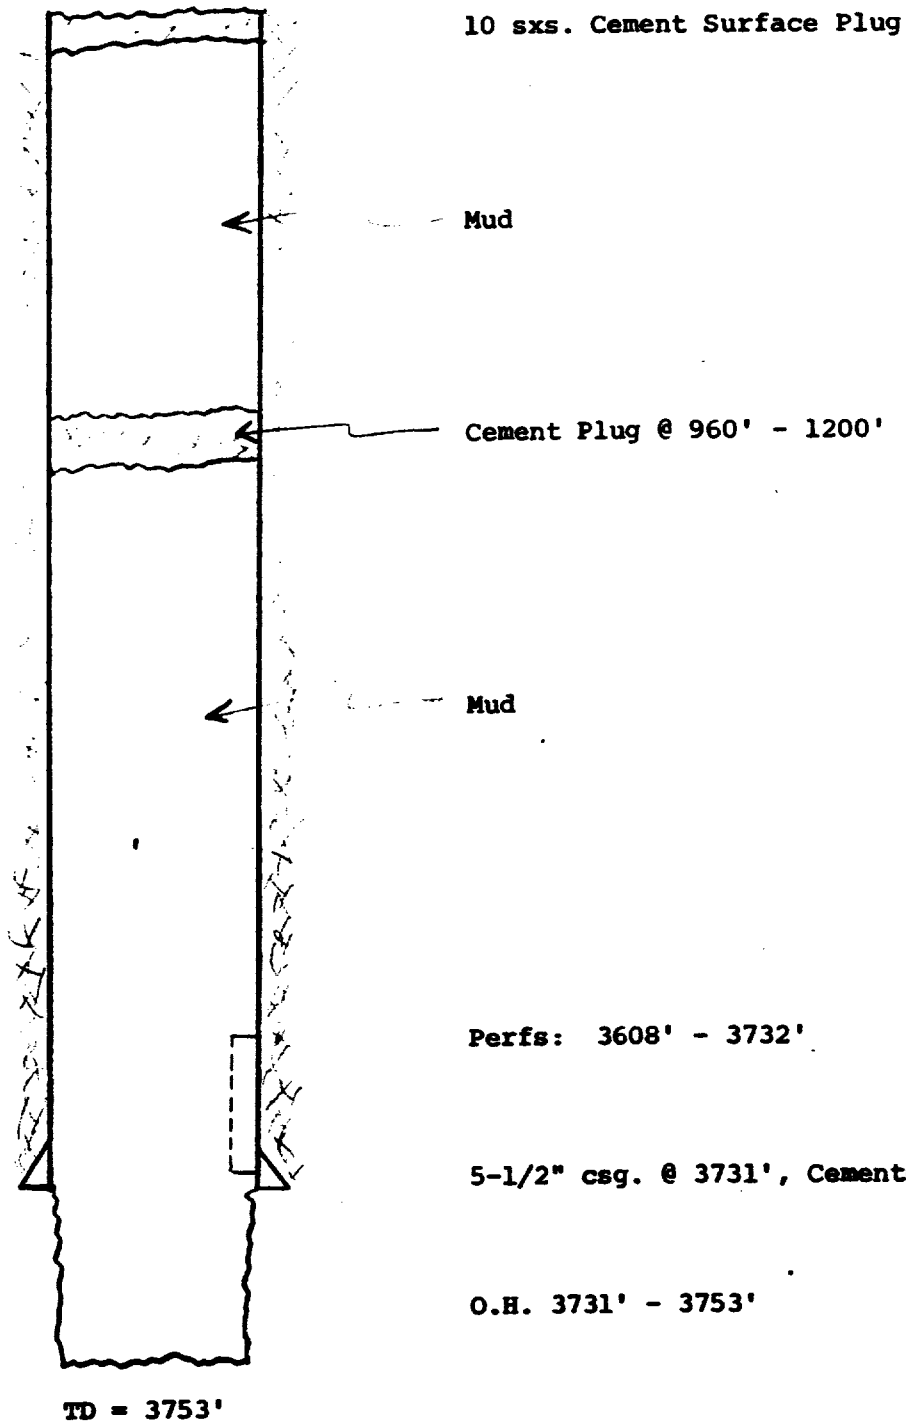

LEA STATE, NO. 3  
660' FNL & 1980 FEL, SEC. 2, T21S, R33E  
B.N. Muncy, Jr.

PLUGGED AND ABANDONED 10-77

