

STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

OIL CONSERVATION DIVISION

P. O. BOX 2088

SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-78

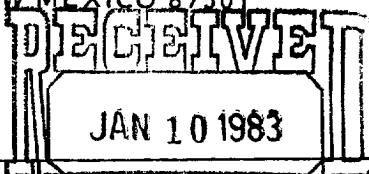

5a. Indicate Type of Lease	
State <input checked="" type="checkbox"/>	Fee <input type="checkbox"/>
5. State Oil & Gas Lease No.	
LG 5582	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A WELL. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. <input checked="" type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER-		7. Unit Agreement Name
2. Name of Operator THE DESANA CORPORATION		8. Farm or Lease Name Wichita State
3. Address of Operator 600 Building of the Southwest, Midland, Texas 79701		9. Well No. 1
4. Location of Well UNIT LETTER <u>M</u> <u>660</u> FEET FROM THE <u>South</u> LINE AND <u>660</u> FEET FROM THE <u>West</u> LINE, SECTION <u>36</u> TOWNSHIP <u>5-N</u> RANGE <u>30-E</u> NMPM.		10. Field and Pool, or Wildcat Wildcat
15. Elevation (Show whether DF, RT, GR, etc.) 4602.1' GL		12. County Quay

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

INTERMEDIATE CASING:

TD 972' - Ran 22 jts 8-5/8" 24# J-55 csg & set @ 972'. Cmdt w/200 sx Halliburton Lite containing 5# salt & 1/4# Flocele. Tailed in w/200 sx Class "C" containing 2% CaCl. Circ 60 sx. Drilled out. Pressure tested w/500#, held O.K.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Tom R. Carr TITLE Production Superintendent DATE 12-29-82

APPROVED BY Carl Whang TITLE DISTRICT SUPERVISOR DATE 1/14/83

CONDITIONS OF APPROVAL, IF ANY: