

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Expires August 31, 1985

6. LEASE DESIGNATION AND SERIAL NO.
NM 53320

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL GAS WELL OTHER

2. NAME OF OPERATOR
Samedan Oil Corporation

3. ADDRESS OF OPERATOR
1616 Glenarm Pl., #2550, Denver, CO 80202

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.)
At surface
1860 FEL & 1660 FSL Sec 14, T3N-R12W

14. PERMIT NO. None Assigned
15. ELEVATIONS (Show whether DF, RT, GR, etc.)
7330 GR 7343 KB

8. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME


8. AGEN OR LEASE NAME
LAGUNA FEDERAL

9. WELL NO.
1

10. FIELD AND POOL, OR WILDCAT
Wildcat

11. SEC, T., R., M., OR BLK. AND SURVEY OR AREA
Sec 14, T3N-R12W

12. COUNTY OR PARISH 13. STATE
Catron NM

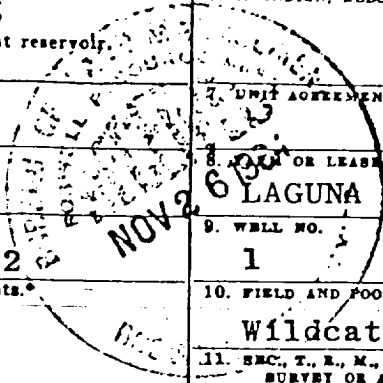

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF
FRACTURE TREAT
SHOOT OR ACIDIZE
REPAIR WELL
(Other)
PULL OR ALTER CASING
MULTIPLE COMPLETE
ABANDON*
CHANGE PLANE

SUBSEQUENT REPORT OF:

WATER SHUT-OFF
FRACTURE TREATMENT
SHOOTING OR ACIDIZING
(Other)
REPAIRING WELL
ALTERING CASING
ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Well was spudded 10/18/84 at 1:00 A.M., TD of 5915' was reached on 11/9/84 at 9:00 A.M. The well was plugged and abandoned per verbal orders of the BLM in Roswell, New Mexico as follows:

Interval	Zone	Sacks	Length	Date
5680-5530	Abo	40	150	11/9/84
4500-4360	Yeso*	100	140	11/9/84
4042-3942	7" Shoe	40	100	11/9/84 Plug tagged.
3085-2985	7" Stub**	50	100	11/12/84 Plug tagged and witnessed by BLM
1950-1830	9-5/8 Shoe	50	120	11/12/84 Plug tagged and witnessed by BLM
60- 0	9-5/8 Surface	25	60	11/12/84 witnessed by BLM

* Set plug in upper Yeso 4500-4080; drilled out to 4360 and ran DST from 4360-4246.

**Shot 7" casing at 3065 and pulled from well.

DST #1 4360-4246 11/11/84.

Times 10 60 60 120

Pressures: IF 67-1216, ISI - 1442, FF 1215-1442, FSI 1448

Recovered: 370' mud 277' MCH₂O, 276' water, chlorides 900 PPM

NOTE: Dry hole marker set on 11/12/84. Well plugged and abandoned.

18. I hereby certify that the foregoing is true and correct

SIGNED Gary L. Brune

TITLE Division Production Superintendent

DATE November 21, 1984

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____

*See Instructions on Reverse Side