


NO. OF COPIES RECEIVED		
DISTRIBUTION		
SANTA FE		
FILE		☒
U.S.G.S.		
LAND OFFICE		
OPERATOR		

NEW MEXICO OIL CONSERVATION COMMISSION

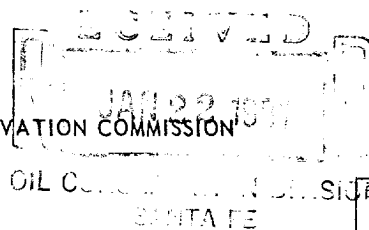

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)		5. Indicate Type of Lease State ☐ Fee ☒
1. ☐ OIL WELL ☒ GAS WELL ☒ CO₂ ☐ OTHER-		5. State Oil & Gas Lease No.
2. Name of Operator <u>Amoco Production Company</u>		7. Unit Agreement Name
3. Address of Operator <u>P. O. Box 68 Hobbs, NM 88240</u>		8. Farm or Lease Name <u>Hutcherson B</u>
4. Location of Well UNIT LETTER <u>J</u>, <u>1980</u> FEET FROM THE <u>South</u> LINE AND <u>1985</u> FEET FROM THE <u>East</u> LINE, SECTION <u>15</u> TOWNSHIP <u>19-N</u> RANGE <u>34-E</u> NMPM.		9. Well No. <u>13</u>
15. Elevation (Show whether DF, RT, GR, etc.) <u>4800 GL</u>		10. Field and Pool, or Wildcat <u>Und. Tubb</u>
12. County <u>Union</u>		

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐ TEMPORARILY ABANDON ☐ PULL OR ALTER CASING ☐ OTHER ☐	PLUG AND ABANDON ☐ CHANGE PLANS ☐	REMEDIAL WORK ☐ COMMENCE DRILLING OPNS. ☒ CASING TEST AND CEMENT JOB ☒ OTHER ☐	ALTERING CASING ☐ PLUG AND ABANDONMENT ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

On 1-3-81 Moran Drilling (Rig #52) spudded a 12-1/4" hole at 12:00 midnight. Drilled to a TD of 700' and ran 8-5/8" casing set at 700'. Cemented with 500 SX Class H cement. Plugged down at 4:00 p.m. 1-5-81. Cement did not circulate. Ran 1" pipe and tagged cement 30' from surface. Pumped 25 SX Class H cement down 1". Circulated 5 SX. WOC 23 hrs. Tested casing with 800# for 30 min. Reduced hole to 7-7/8" and resumed drilling. Drilled to a TD of 2480' and ran 5-1/2" casing set at 2480'. Cemented with 650 SX Class H cement. Plugged down at 12:00 noon 1-10-81. Circulated 250 SX. Currently waiting on completion unit.

0+2-NMOCD, SF 1-Hou 1-Susp 1-BD

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Bob Davis TITLE Admin. Analyst DATE 1-13-81

APPROVED BY Carl Ullvog TITLE SENIOR PETROLEUM GEOLOGIST DATE 1-23-81

CONDITIONS OF APPROVAL, IF ANY