Form 3160-5 (August 1999)

UNITED STATES DEPARTMENT OF THE INTERIOR

Oil Cons. N.M. DIV-Dist. 2 1301 W. Grand Avenue

FORM APPROVED OMB No. 1004-0135 Expires November 30, 2000 5

SUNDRY NOTICES AND REPORTS ON WELLS

Of Use this form for proposals to deliferations. Do not use this form for proposals to drill or to re-enter an shandoned well lise Form 3160-3 (APD) for such proposals.

If Indian, Allottee or Tribe Name


abandoned Wen. Ode Form Cross (A. D.) 16. Calc. P. opeca.c.					
2.00	PLICATE - Other instru	ictions on reverse	side	7. If Unit o	r CA/Agreement, Name and/or No.
Type of Well		3b. Phone No. (include area orde) (915)683-7443 RECEIVED		8. Well Name and No. Federal "AA" #2 9. API Well No. 30-015-32575	
				4. Location of Well (Footage, See 1961' FNL & 2113' FWL, S	c., T., R., M., or Survey Descripti ec. 17, T-22-S, R-26-E
12. CHECK AP	PROPRIATE BOX(ES) T	O INDICATE NATU	RÉ OF NOTICE, RI	EPORT, OF	OTHER DATA
TYPE OF SUBMISSION	TYPE OF ACTION				
☐ Notice of Intent	☐ Acidize ☐ Alter Casing	Deepen Fracture Treat	Production (Start Reclamation	/ Resume)	 □ Water Shut-Off □ Well Integrity ▼ Other Spud & csg.test
Subsequent Report Final Abandonment Notice	Casing Repair Change Plans Convert to Injection	New Construction Plug and Abandon Plug Back	Recomplete Temporarily Aba: Water Disposal	ndon	
13. Describe Proposed or Complete	-	tinent details, including esti	imated starting date of an	y proposed wo	ork and approximate duration thereof.

If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

3-26-03 Spud 17 1/2" hole @ 4 PM CST

3-29-03 Ran 16 jts. 13 3/8" 48# H-40 csg. set @ 690'. Ran 5 centralizers & cemented w/Pre lead #1:40 bbls GW-27 gel & Lead #1 Thix 200 sx H + 10% A-10 + 1% CaCI + 1/4# CF + 10# Gilsonite & followed by Lead #2 450 sx 35/65 sx CI C + 2% CaCl + 1/4# CF + 5# Gilsonite + 6% gel & tailed w/200 sx C + 2% CaCl. 1" to surface w/438 sx C + CaCl2.

4-08-03 Ran 61 jts. of 9 5/8" 40# J-55 LT&C csg in 12 1/4" hole set @2594'. Ran 10 centralizers and cmt'd w/lead 1: 180 sx Thixset & lead 2: 750 sx 50/50 Poz C, 5% salt, 10% Gel, 5# gil, 1/4# CF & tailed 220 sx Cl C w/2% CaCl2. Circ 250 sx to pit.

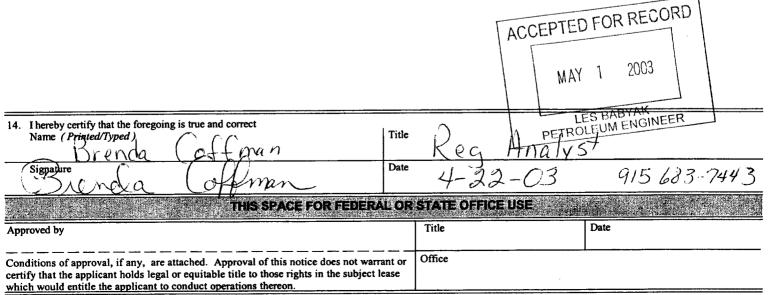

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.