

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.

NMNM-2933

6. If Indian, Allottee or Tribe Name

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other

RECEIVED

2. Name of Operator

Mack Energy Corporation

JUL 01 2005

OCU-ARTESIA

3. Address and Telephone No.

P.O. Box 960, Artesia, NM 88211-0960

(505)748-1288

4. Location of Well (Footage, Sec., T. R., M. or Survey Description)

660 FNL & 660 FEL, Sec. 17-T17S-R30E, A

8. Well Name and No.

ETZ State Unit #101

9. API Well No.

30-015-20547

10. Field and Pool, or Exploratory Area

Grayburg Jackson; 7RVS-QN-GB-SA

11. County or Parish, State

Eddy, NM

12 CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒
- Notice of Intent
-
- ☐
- Subsequent Report
-
- ☐
- Final Abandonment Notice

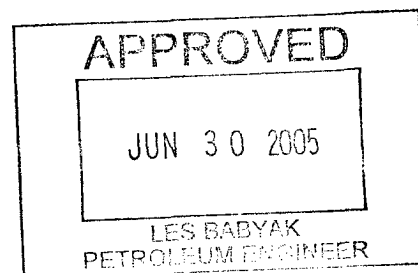
TYPE OF ACTION

- ☒
- Abandonment
-
- ☐
- Recompletion
-
- ☐
- Plugging Back
-
- ☐
- Casing Repair
-
- ☐
- Altering Casing
-
- ☐
- Other _____
-
- ☐
- Change of Plans
-
- ☐
- New Construction
-
- ☐
- Non-Routine Fracturing
-
- ☐
- Water Shut-Off
-
- ☐
- Conversion to Injection
-
- ☐
- Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)*

1. Notify BLM 24 hours prior to starting plugging operations.
2. Set CIBP @ 2046' w/35' cement cap above perfs @ 2096' and circ hole with mud.
3. Perf @ 1045' squeeze cement 50' above and below bottom of salt.
4. Perf @ 557' squeeze cement 50' above and below 8 5/8" shoe.
4. Set 10 sx surface plug.
5. Install dry hole marker.

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS ATTACHED

14. I hereby certify that the foregoing is true and correct

Signed

Jerry W. Sherrell

Title

Production Clerk

Date

6/16/2005

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Accepted for record - NMOCD

MACK ENERGY CORPORATION
 ETZ STATE 101
 SEC 17 T17S R30E 660FNL 660FEL

