


Occidental Oil & Gas Corp – Permian Primary – North NM/Terrell RMT

Well: Piglet 21 State #19		API: 30-015-40434	
State: New Mexico	County: Eddy	T17S R28E, Sec 21	2090' FSL & 1190' FEL
Field: Empire	TD: 4,830'	PBTD: 4,789'	KB: 3,668' ASL
Casing Size:	Grade/Weight:	Depth:	Cement:
8-5/8"	J-55 STC / 24#	436'	405 sx, 5 bbls circ'd to surf
5-1/2"	L-80 LTC / 17#	4,830'	830 sx, 140 bbls circ'd to surf

Surf Csg: 8-5/8" 24# J-55 STC
Cement: 405 sx, 5 bbls circ'd to surf


Surf Csg @ 436'



Perforation Intervals

Stage 4b: 3,612' – 3,620.7'
 Stage 4a: 3,737.3' – 3,746'
 Stage 3b: 3,873' – 3,881.7'
 Stage 3a: 4,058.3' – 4,067'
 Stage 2b Alt: 4347' – 4352'
 Stage 2b: 4,356.3' – 4,365'
 Stage 2a Alt: 4466' – 4471'
 Stage 2a: 4,482.3' – 4,491'
 Stage 1b: 4,646.3' – 4,656.7'
 Stage 1a: 4,740.3' – 4,749'

Prod Csg: 5-1/2" 17# L-80 LTC
Cement: 830 sx, 140 bbls circ'd to surf

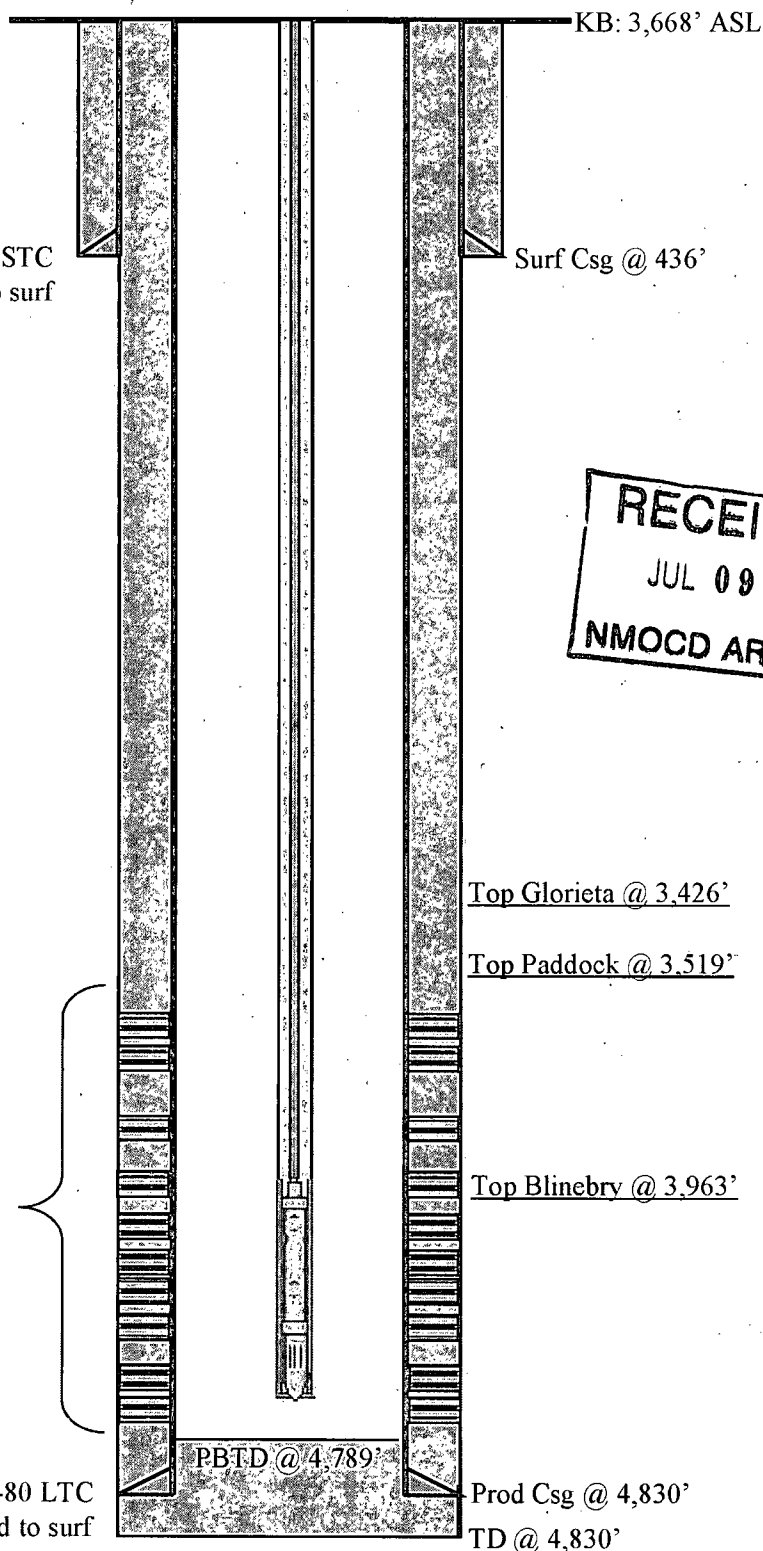

Top Glorieta @ 3,426'

Top Paddock @ 3,519'

Top Blinebry @ 3,963'

PBTD @ 4,789'

Prod Csg @ 4,830'

TD @ 4,830'