


OXY USA WTP LP - Current
Federal 12 #1
API No. 30-015-26742

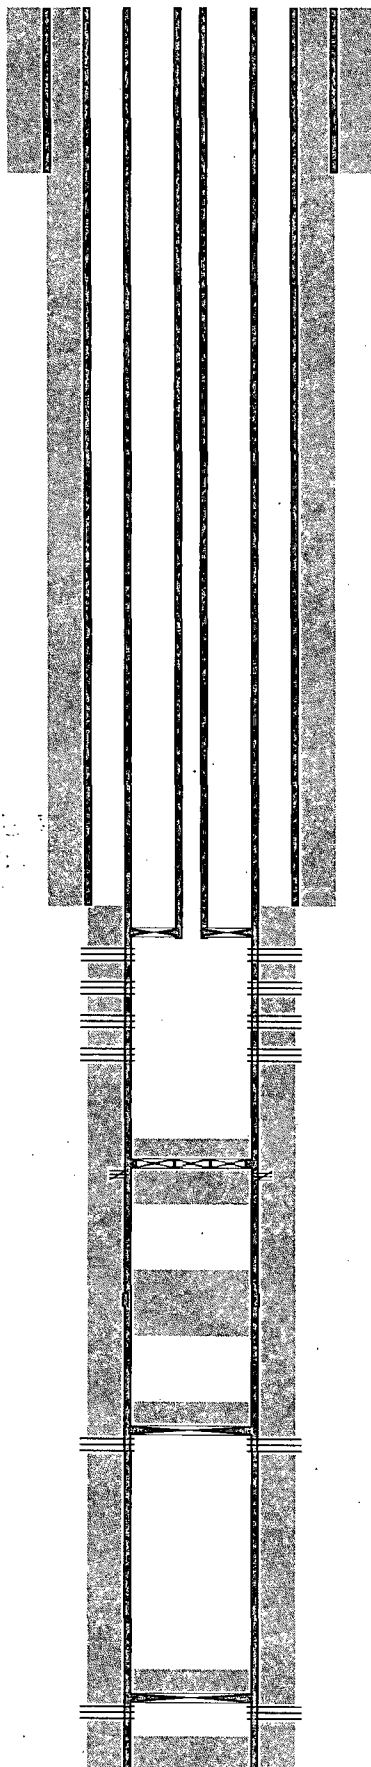

17-1/2" hole @ 828'
13-3/8" csg @ 828'
w/ 950sx-TOC-Surf-Circ

NM OIL CONSERVATION

ARTESIA DISTRICT

DEC 15 2014

RECEIVED

2-7/8" 6.5# PLS-20 compsite tbg &
nickel plated AS-1X pkr @ 4620'

11" hole @ 4325'
8-5/8" csg @ 4325'
w/ 1900sx-TOC-Surf-Circ

Perfs @ 4672-4962'

CR @ 5724', w/ 25sx to 5742' Tagged

Perf @ 5745', sqz 380sx cmt to 4472'-CBL

25sx @ 6260-6004' Tagged

CIBP @ 6995' w/ 30sx to 6638' Tagged

Perfs @ 7042-7074'

CIBP @ 8220' w/ 30sx to 7948' Tagged

7-7/8" hole @ 8439'
5-1/2" csg @ 8439'
DVT @ 6197'
w/ 1402sx-TOC-5765'-CBL

Perfs @ 8270-8336'

TD-8439'

OXY USA WTP LP - Current
Federal 12 #1
API No. 30-015-26742

17-1/2" hole @ 828'
13-3/8" csg @ 828'
w/ 950sx-TOC-Surf-Circ

NM OIL CONSERVATION
ARTESIA DISTRICT

DEC 15 2014

RECEIVED

11" hole @ 4325'
8-5/8" csg @ 4325'
w/ 1900sx-TOC-Surf-Circ

CIBP @ 6995' w/ 30sx to 6633' tagged

CIBP @ 8224' w/ 30sx to 7948' tagged

Perfs @ 7042-7074'

7-7/8" hole @ 8439'
5-1/2" csg @ 8439'
DVT @ 6197'
w/ 1402sx-TOC-5765'-CBL

Perfs @ 8270-8336'

TD-8439'

