

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 August 1, 2011

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-015-24344
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name State MO
8. Well Number 1
9. OGRID Number 229137
10. Pool name or Wildcat SWD; Atoka

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
COG Operating LLC

3. Address of Operator
600 W. Illinois Ave. Midland, TX 79701

4. Well Location
 Unit Letter **F** : **1320** feet from the **N** line and **1320** feet from the **W** line
 Section **27** Township **17S** Range **28E** NMPM County **Eddy**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3654' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- MIRU plugging equip. ND wellhead. NU BOP. POH w/ injection tbg and packer.
- RIH & set 5 1/2 CIBP @ 7900'. Circulate hole w/ mud laden fluid.
- Spot 25 sx cement on top of CIBP 7900-7750'.
- Spot 25 sx cement @ 5900-5750.
- Spot 25 sx cement @ 2650-2500.
- Spot 35 sx cement @ 2230-1900. WOC & Tag. (shoe)
- Spot 25 sx cement @ 900-800. WOC & Tag.
- Spot 45 sx cement @ 450-200. WOC & Tag. (shoe & top of salt)
- Perf & Sqz 45 sx cement @ 60' to surface.
- Cut off wellhead and weld on Dry Hole Marker.

Approved for plugging of well bore only.
 Liability under bond is retained pending receipt of C-103 (Subsequent Report of Well Plugging) which may be found at OCD Web Page under Forms, www.cmnrd.state.nm.us/ocd.

well bore must be plugged by 6/2/2016

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Ben Montgomery* TITLE *Agent* DATE *5-29-15*

Type or print name *Ben Montgomery* E-mail address: *ben@benandassociates.com* PHONE: *432-580-7161*

APPROVED BY: *[Signature]* TITLE *Dist R Supervisor* DATE *6/2/2015*

Conditions of Approval (if any):

** See Attached COA's*

COG Operating LLC (MARBOB)

Lease & Well #
3001524344


State MO #1 SWD

SPUD - 12/20/1982

Eddy Co., NM

Sec 27 T17S R28E 1320 FNL & 1320 FWL

Elevation - 3653.9'

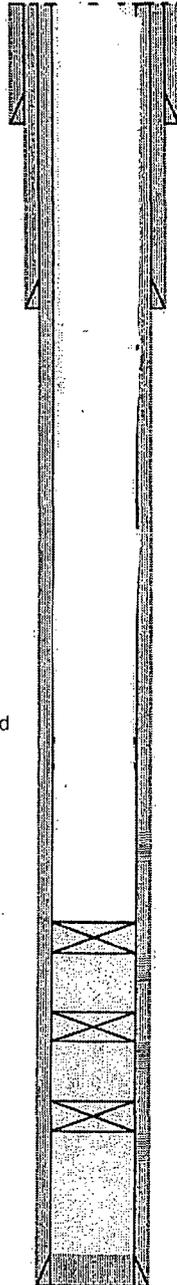

13 3/8" 48. # H-40 @ 400', 450 C, circ 35 sx

8 5/8" 28# 8rd S-80 STC @ 2,090', C/w 1300 sx, circ. 120 sx

Pkr fluid

227 jts. 2 7/8" IPC J-55 (?) tbg. 10/27/2009

5 1/2" x 2 7/8" NC 10K AS1-X pkr @ 7,516'

w/2.188" Otis R O/O tool, P/O plug on bottom

Wolfcamp

7927 - 7997, Acidized w/1,00 gal 15% NEFE.

(Originally perf'd 7920 - 7972', swab tested and squeezed w/200 sx.)

CIBP - 9,520'
w/3.5x cap

Atoka

9,890 - 9,902', Acidized w/1,500 gal 7 1/2% MS HCL

CIBP - 10,120'
w/35' cmt cap

Morrow

10,130 - 10,147' 4 jspf, Acidized w/2,000 gal 7 1/2% Morrow acid

CIBP - 10,180'

10,197 0 10,232', 4 dpjspf, swab tested.

Cmt. 1st stage: 1050 sx 50/50 poz lead, 600 sx H Tail, circ 88.sx

Cmt wnd stage: 950 sx C lite lead, 400 sx H tail, circ 500 sx

5 1/2" 17# N-80 & K-55, 15.5# K-55 LT&C csg @ 10,593'.

Lat 32.8091437
Long - 104.1681012

5/29/2015

State MO 1 SWD WBD

SHodges

COG Operating LLC (MARBOB)

Lease & Well #
3001524344

State MO #1 SWD

Eddy Co., NM

SPUD - 12/20/1982

Sec 27 T17S R28E 1320 FNL & 1320 FWL

Elevation - 3653.9'

PC 52 4550' surface

45' 5" @ 450-200

25' 5" @ 900-800

35' 5" @ 2230-1950

25' 5" @ 2650-2500

25' 5" @ 5900-5750

GP 27500 4/2531

Pkr fluid


CIBP - 9,520'

w/3 sx cap

CIBP - 10,120'

w/35' cmt cap

CIBP - 10,180'

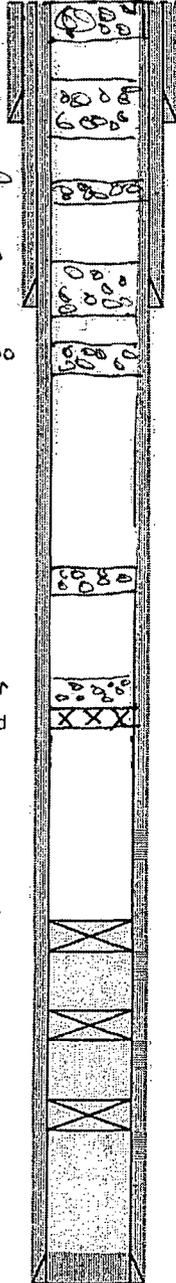

13 3/8" 48 # H-40 @ 400', 450 C, circ 35 sx

8 5/8" 28# 8rd S-80 STC @ 2,090', C/w 1300 sx, circ. 120 sx

227 jts 2 7/8" IPC J-55 (?) tbg. 10/27/2009

5 1/2" x 2 7/8" NC 10K AS1-X pkr @ 7,516'

w/2.188" Otis R O/O tool, P/O plug on bottom

Wolfcamp

7927 - 7997, Acidized w/1,00 gal 15% NEFE.

(Originally perf'd 7920 - 7972', swab tested and squeezed w/200 sx.)

Atoka

9,890 - 9,902', Acidized w/1,500 gal 7 1/2% MS HCL

Morrow

10,130 - 10,147' 4 jspsf, Acidized w/2,000 gal 7 1/2% Morrow acid

10,197 0 10,232', 4 dpjspf, swab tested.

Cmt. 1st stage: 1050 sx 50/50 poz lead, 600 sx H Tail, circ 88 sx

Cmt wnd stage: 950 sx C lite lead, 400 sx H tail, circ 500 sx

5 1/2" 17# N-80 & K-55, 15.5# K-55 LT&C csg @ 10,593'.

Lat 32.8091437
Long - 104.1681012

5/29/2015.

State MO 1 SWD WBD

SHodges

NEW MEXICO OIL CONSERVATION DIVISION
DISTRICT 2 OFFICE
811 S. FIRST STREET
ARTESIA, NM 88210
(575)748-1283

CONDITIONS OF APPROVAL FOR PLUGGING & ABANDONMENT

Operator: COG

Well Name & Number: State MO 1

API #: 30-015-24344

1. Produced water **will not** be used during any part of the plugging & abandonment operation.
2. Notify NMOCD Dist. 2 office at least 24 hrs before beginning work.
3. Closed Loop System is to be used for entire plugging operation. Upon completion, contents of steel pit are to be hauled to a permitted disposal location.
4. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator, as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall produce a copy upon request of NMOCD Field Inspectors.
5. A subsequent C-103 will serve as notification that the well bore has been plugged **ONLY**. A C-103 FINAL shall be filed before any bonding can be released on the well. Upon receipt of the Final, an inspection will be performed to verify that the location has been satisfactorily cleaned to NMOCD standards.
6. If work has not begun within 90 days of the approval of this procedure, an extension request must be filed, stating reason that well has not been plugged.
7. Every attempt must be made to clean the well bore out to below the perfs, before any plugs can be set, by whatever means possible.
8. **Cement Retainers may not be used.**
9. **Squeeze pressures are not to exceed 500 PSI, unless approval is given by NMOCD.**
10. **Plugs may be combined after consulting with and getting approval from NMOCD.**
11. **Minimum WOC time for tag plugs will be 4 Hrs.**

AD

6/2/2015

GUIDELINES FOR PLUGGING AND ABANDONMENT

DISTRICT II / ARTESIA

- All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater.
- Mud laden fluids must be placed between all cement plugs.
- Mud laden fluids must be mixed at 25 sacks of gel per 100 bbls of water.
- A cement plug is required to be set 50' below and 50' above all casing shoes and casing stub plugs. These plugs must be tagged.
- A CIBP with 35' of cement on top may be set in lieu of 100' cement plug.
- A plug as indicated above must be placed within 100' of top perforation. This plug must be tagged.
- Plugs set below and above salt zones must be tagged.
- No more than 2000' is to be allowed between cement plugs in open hole and no more than 3000' in cased hole.
- DV tools are required to have a 100' cement plug set 50' above and below the tool and must be tagged.

- Formations to be isolated with plugs placed at the top of each formation are:
 - Fusselman
 - Devonian
 - Morrow
 - Wolfcamp
 - Bone Spring
 - Delaware
 - Any Salt Section (Plug at top and bottom)
 - Abo
 - Glorieta
 - Yates (this plus is usually at base of salt section)

- If cement does not exist behind casing strings at recommended formation depths, the casing must be cut and pulled with plugs set at these depths or casing must be perforated and cement squeezed behind casing at the formation depths.
- In the R-111-P area (Potash Mine area) a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts common to the section penetrated and in suitable proportions, but not more than a 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible (50' below and 50' above).