

30-015-42745

WELL NAME: CROW FEDERAL 43H
 API: 30-015-42745
 SPUD DATE: 1/21/2015
 PRODUCING FORMATION: YESO UPR BLINEBRY
 FIELD: FREN
 COUNTY: EDDY
 STATE: NEW MEXICO
 WORKING INTEREST 60.00%


SURFACE LOC: 2298' FSL & 10' FWL
 SECTION: 3
 TOWNSHIP: 17-S
 RANGE: 31-E
 SURVEY: JOHN WEST SURVEYING CO
 BOTTOM HOLE LOC: 2314' FSL & 319' FEL
 SECTION: 4
 TOWNSHIP: 17-S
 RANGE: 31-E
 SURVEY: JOHN WEST SURVEYING CO

DRILL RIG: CAPSTAR 114
 RIG RELEASE: 2/7/2015

KB (ft): 3,951.00
 GL (ft): 3,940.00
 KB/GL DIFF (ft): 11.00
 TMD (ft): 10,521.00
 TD OF PILOT HOLE (ft): N/A
 FC DEPTH (ft): 10,472.00
 PBMD (ft): 10,521.00
 RDV DEPTH (ft): N/A
 ORIO VALVE (ft): N/A
 DEEPEST TVD (ft): 5,796.00

TAPERED CASING STRING:

7" 29# L-80 TO X-OVER @ 5,296'
 TAPERING TO 5.5" 20# L-80 SET @ 10,481'

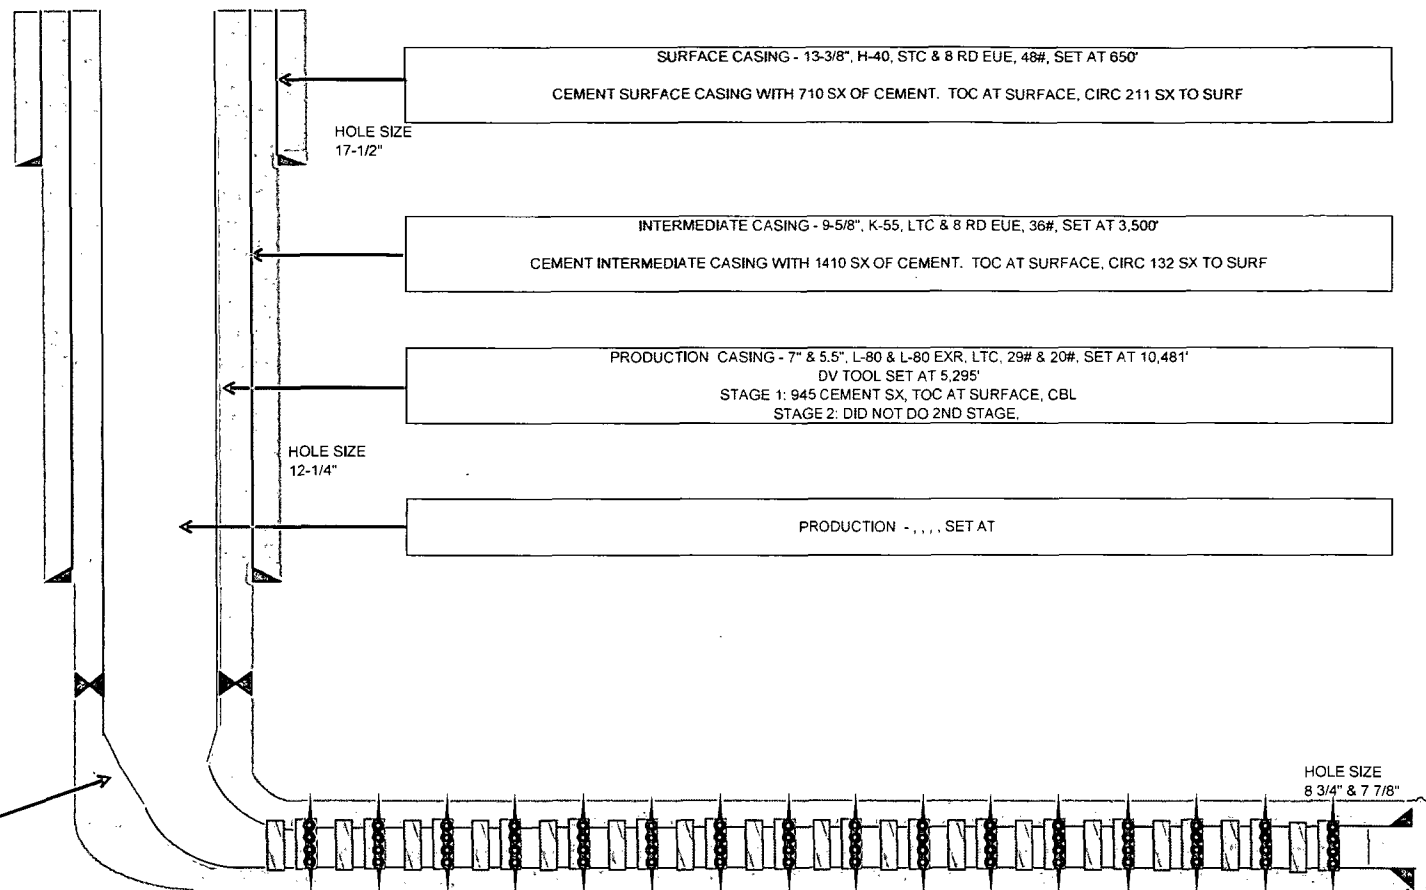

KOP (ft): 5,300
 LATERAL LENGTH (ft): 4,464
 TD OF PILOT HOLE (ft): N/A

PACKERS & SLEEVES

TOP PERF (MD): 6,111
 BOTTOM PERF (MD): 10,485

TMD (ft): 10,521
 FC DEPTH (ft): 10,472
 PBMD (ft): 10,521
 RDV DEPTH (ft): N/A
 ORIO VALVE (ft): N/A

COMPLETION:

PACKERS & SLEEVES - 15 STAGES

STIMULATON:

TOTAL ACID (gal)	TOTAL LTR (bbl)	TOTAL PROPPANT (lbs)	MAX WH RATE (bpm)	MAX WH PRESSURE (psi)
2,594	77.867	2,932,688	93.00	7,648

STATUS:

PRODUCTION METHOD	LIFT TYPE	SETTING DEPTH
0	0	0

COMMENTS:

CROSSOVER SUB @ 5,296'

LAST UPDATED BY: HILLARI GOULD
 LAST UPDATED: 6/4/2015