

WELL NAME: NFE FEDERAL COM 29H
API: 30-015-42585
SPUD DATE: 3/10/2015
PRODUCING FORMATION: YESO UPPER BLINBERRY
FIELD: CEDAR LAKE (BP)
COUNTY: EDDY
STATE: NEW MEXICO
WORKING INTEREST: 60.00%

SURFACE LOC: 985 FSL & 155 FEL
SECTION: 6
TOWNSHIP: 17-S
RANGE: 31-E
SURVEY: JOHN WEST SURVEYING CO
BOTTOM HOLE LOC: 983 FSL & 333 FWL
SECTION: 6
TOWNSHIP: 17-S
RANGE: 31-E
SURVEY: JOHN WEST SURVEYING CO
DRILL RIG: CAPSTAR 119
RIG RELEASE: 3/26/2015


KB (ft): 3,764.00
GL (ft): 3,753.00
KB/GU DIFF (ft): 11.00
TMD (ft): 9,580.00
TD OF PILOT HOLE (ft): N/A
FC DEPTH (ft): 9,548.00
PBMD (ft): 9,580.00
RDV DEPTH (ft): N/A
ORD VALVE (ft): N/A
DEEPEST TVD (ft): 5,324.00

TAPERED CASING STRING:
7" 29# L-80 TO X-COVER @ 4,811'
TAPERING TO 5.5" 20# L-80 SET @ 9,567'

KOP (ft):
LATERAL LENGTH (ft):
TD OF PILOT HOLE (ft):

LAST UPDATED BY: HILLARI GOULD
LAST UPDATED: 10/12/2015

COMPLETION:
STIMULATION:
STATUS:
COMMENTS:

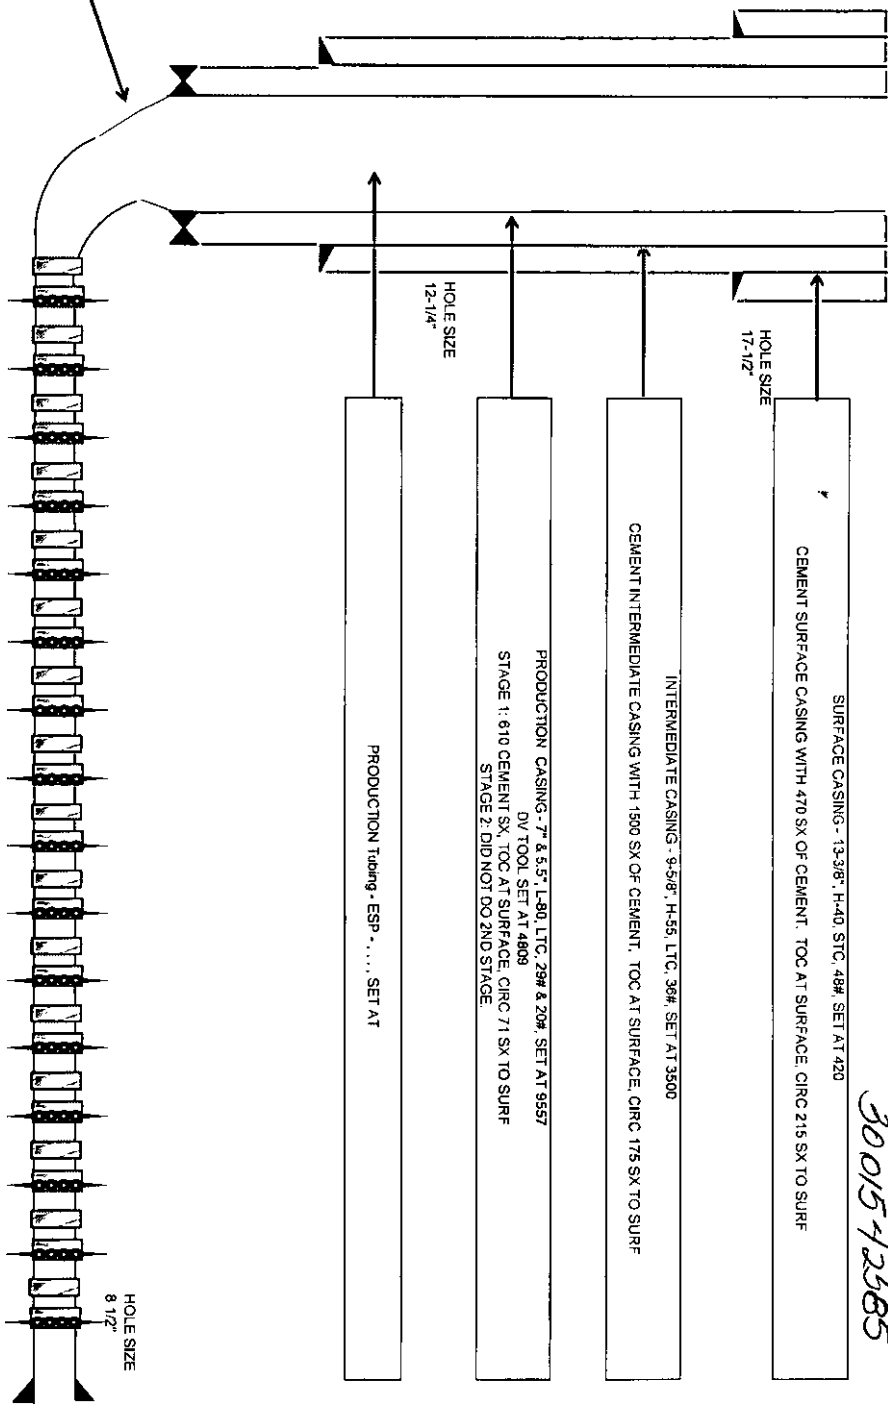

30015-42585

PACKERS & SLEEVES
TOP PERF (MD):
BOTTOM PERF (MD):

TMD (ft): 9,580
FC DEPTH (ft): 9,548
PBMD (ft): 9,580
RDV DEPTH (ft): N/A
ORD VALVE (ft): N/A

PACKERS & SLEEVES - 14 STAGES				
TOTAL ACID (gal)	TOTAL LTR (bbl)	TOTAL PROPANT (lbs)	MAX WH RATE (bpm)	MAX WH PRESSURE (psi)
2,456	61,075	2,659,660	94.00	7,050
PRODUCTION METHOD	LIFT TYPE	SETTING DEPTH		
Pumping	ESP	0		
CROSSOVER SUB @ 4,811'				