

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

OCT 01 2008

Form C-103
June 19, 2008

OCD ARTESIA

WELL APPL NO
30-015-28194

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

L-1611

7. Lease Name or Unit Agreement Name
Stonewall AOS State Com

8. Well Number

1

9. OGRID Number

025575

10. Pool name or Wildcat

Burton; Yates, South

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator

Yates Petroleum Corporation

3. Address of Operator

105 South Fourth Street, Artesia, NM 88210

4. Well Location

Unit Letter P : 660 feet from the South line and 660 feet from the East line
Section 20 Township 20S Range 28E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3231'GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. Rig up all safety equipment as needed. No casing recovery will be attempted.
2. Set a CIBP at 630' with 35' cement on top. Load the hole with plugging mud.
3. Spot a 15 sx Class "C" cement plug from 316' to 464'. WOC and tag. Reset plug if necessary.
4. Spot a 15 sx Class "C" cement plug from 0' to 148'. WOC and tag. Reset plug if necessary.
5. Remove all surface equipment and weld dry hole marker as per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Notify OCD 24 hrs. prior
to any work done.

Approval Granted providing work
is complete by 1/1/09

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Tina Huerta

TITLE

Regulatory Compliance Supervisor

DATE

September 26, 2008

Type or print name

Tina Huerta

E-mail address:

tinah@ypcnm.com

PHONE:

575-748-4168

For State Use Only

APPROVED BY:

John Hansen

TITLE

John Hansen

DATE 10/2/08

Conditions of Approval (if any):

WELL NAME: Stonewall AOS State Com #1 FIELD: Burton Yates South
 LOCATION: 660' FSL & 660' FEL of Section 20-20S-28E Eddy Co., NM
 GL: 3,231' ZERO: _____ KB: _____
 SPUD DATE: 12/6/94 COMPLETION DATE: 12/19/94
 COMMENTS: API No.: 30-015-28194

CASING PROGRAM

7" 26# J-55	414'
4-1/2" 11.6# J-55 (559')	760'
4-1/2" 10.5# J-55 (210')	

Before

TOPS

Yates 580'

9-7/8" Hole

6-1/8" Hole

7" @ 414' w/325 sx (Circ)

Yates Perfs: 680-726'

TD: 760'

4-1/2" @ 760' w/125 sx (Circ)


Not to Scale

9/17/08

DC/Hill

WELL NAME: Stonewall AOS State Com #1 **FIELD:** Burton Yates South
LOCATION: 660' FSL & 660' FEL of Section 20-20S-28E Eddy Co., NM
GL: 3,231' **ZERO:** **KB:** **CASING PROGRAM**
SPUD DATE: 12/6/94 **COMPLETION DATE:** 12/19/94
COMMENTS: API No.: 30-015-28194

7" 26# J-55	414'
4-1/2" 11.6# J-55 (559')	760'
4-1/2" 10.5# J-55 (210')	

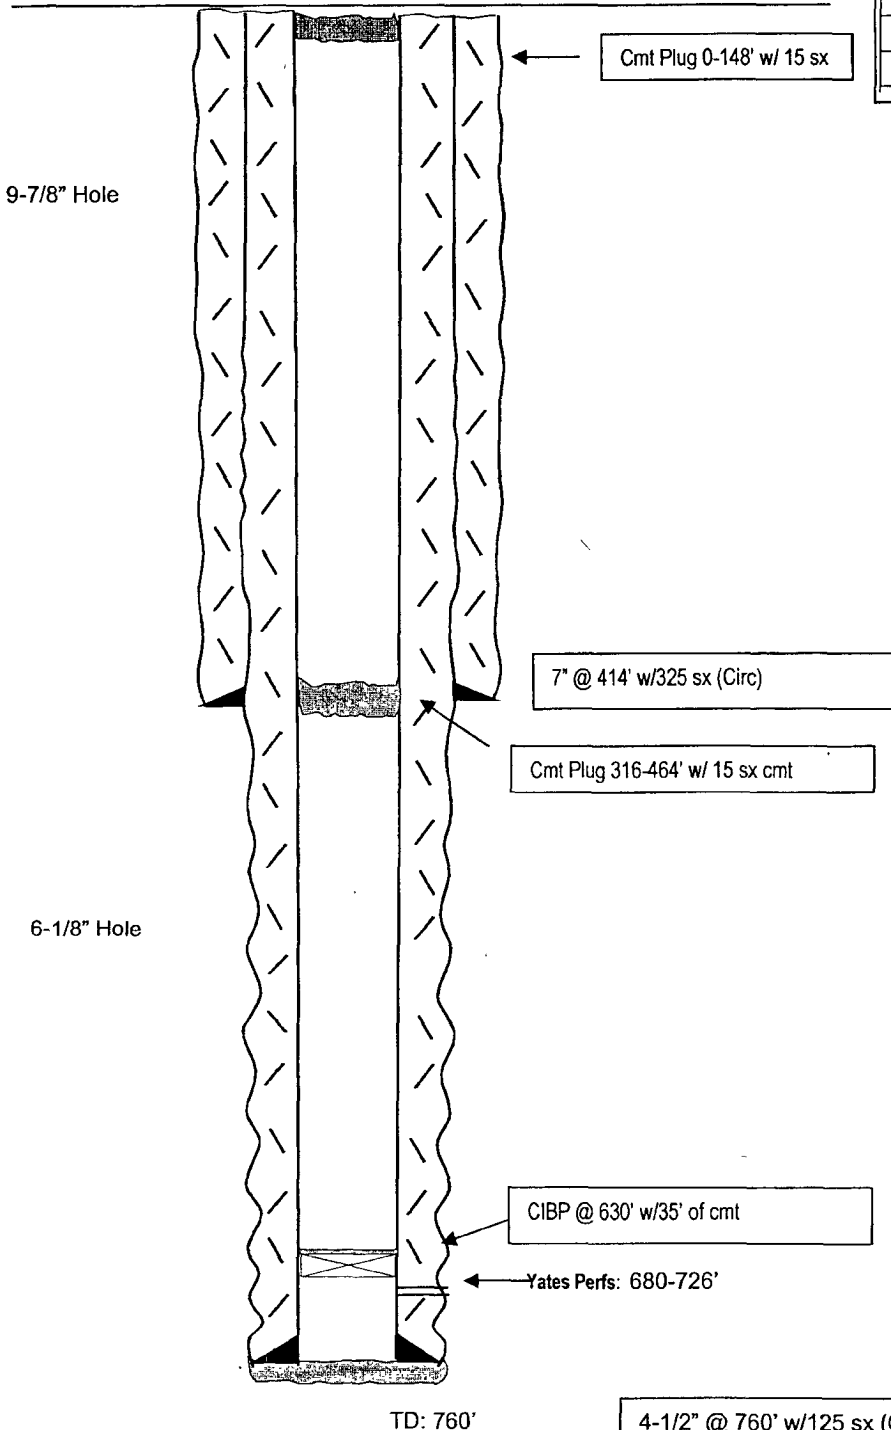

After

TOPS
 Yates 580'

Not to Scale
 9/17/08
 DC/Hill