

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	1
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

RECEIVED

DEC 9 1980

O. C. D.

ARTESIA, OFFICE

30-005-60836

Form C-101
Revised 1-1-65

5A. Indicate Type of Lease
STATE ☐ FEE ☒
5. State Oil & Gas Lease No.

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. Type of Work DRILL ☒ DEEPEN ☐ PLUG BACK ☐		7. Unit Agreement Name
b. Type of Well OIL WELL ☐ GAS WELL ☒ OTHER ☐ SINGLE ZONE ☐ MULTIPLE ZONE ☐		8. Farm or Lease Name Hondo River Farm
c. Name of Operator Fred Pool Drilling Co. ✓		9. Well No. 1
d. Address of Operator Box 1300 Clovis Star Rt. Roswell, N.M. 88201		10. Field and Field, or Unit Name Wildcat
e. Location of Well UNIT LETTER F LOCATED 1980 FEET FROM THE W LINE AND 1980 FEET FROM THE N LINE OF SEC. 4 TWP. 11N R. 25E N.M.		11. County Chaves
18. Proposed Depth 7000		19. Formation Granite Wash
20. Battery or Casing Rotary		21. Approx. Date Work will start Dec. 30, 1980
22. Elevation (show whether Dr., R., etc.) 3464.4 Gr		23. Kind & Status Plug. Band Blanket
24. Drilling Contractor Fred Pool,		

PROPOSED CASING AND CEMENT PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
24"	20"	60#	40 ft.	7yds. crouted in	
17 1/2"	13 3/8"	54#	700 ft.	450 sx	
12 1/4"	8 5/8"	24#	1200 ft.	650 sx	
7 7/8"	4 1/2"	10.5#	6000 ft.	800 sx	

Double QRC Hydraulic Blow out Preventer will be used on well.

Gas is not dedicated as this time.

APPROVAL VAND
FOR 90 DAYS UNLESS
DRILLING COMMENCED,

EXPIRES 3-10-81

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed [Signature] Title Secretary Date 12-1-80


(This space for State Use)

APPROVED BY [Signature] TITLE SUPERVISOR, DISTRICT II DATE DEC 10 1980

CONDITIONS OF APPROVAL, IF ANY:


Cement must be circulated to
surface behind 13 3/8" & 8 5/8" casing

Notify N.M.O.C. in sufficient
time to witness cementing
the 13 3/8" casing

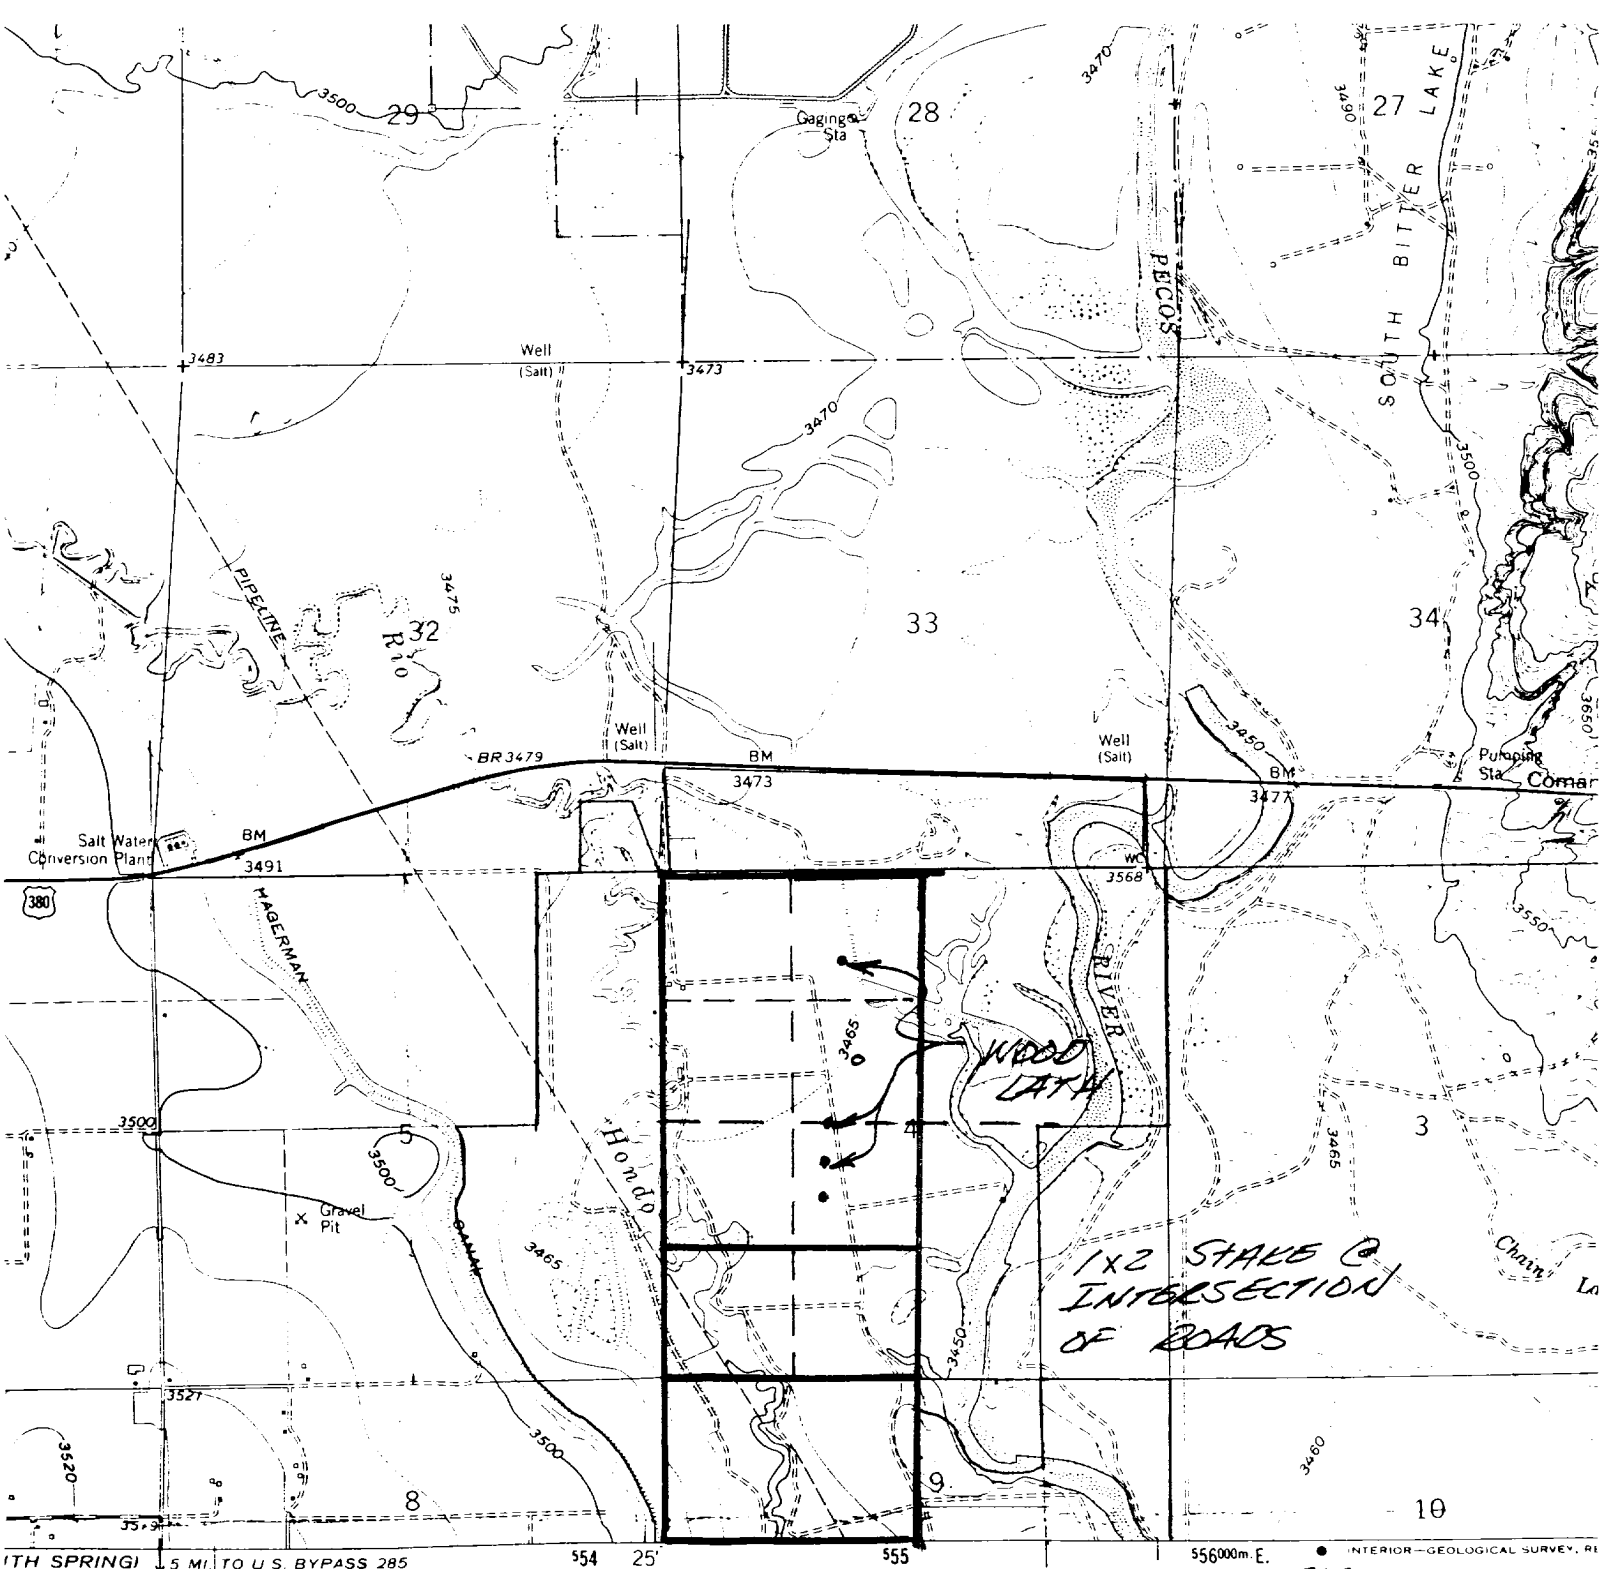

WITH SPRING 150 IV SW 5 MI. TO U.S. BYPASS 285

SCALE 1:24,000

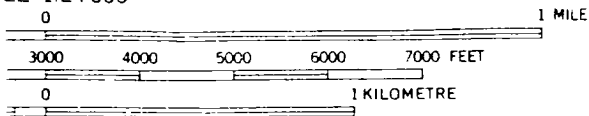


INTERVAL 10 FEET
PRESENT 5-FOOT CONTOURS
VERTICAL DATUM OF 1929

NATIONAL MAP ACCURACY STANDARDS
RIVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

APPROXIMATE WELL LOCATIONS

J. P. WHITE FARM



QUADRANGLE LOCATION

ROAD CLASSIFICATION

Heavy-duty ——— L
Medium-duty - - - - - U
U.S. Route

BITTE
N33