

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE
NM 011 (Consist Comm-310)
verse side
Drawer DD

Form approved.
Budget Bureau No. 1004-0135
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO

NM 17417

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Barbara Ann Federal

9. WELL NO.

#1

10. FIELD AND POOL, OR WILDCAT

Undes. ABO

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 7, T7S, R27E

12. COUNTY OR PARISH

Chavez

13. STATE

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

RECEIVED

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐

2. NAME OF OPERATOR
PETROLEUM DEVELOPMENT CORPORATION

3. ADDRESS OF OPERATOR
9720 B CANDELARIA NE ALBUQUERQUE NM 87112

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface 660' FNL, 660" FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)
3883' GL 3895' KB

DEC 14 '89
C. C. D.
ARTESIA, OFFICE

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

13 3/8" Set @ 552' cemented to surface
4 1/2" set @ 5023', top of cement @ 3670'
1" 4 1/4"-13 3/8" Annulus from 860' to surface

- (1). Set castiron BP @ 4700', spot 10 sx cement plug
- (2). Displace w/9.0# Gel mud f/4600' to 3600'
- (3). Spot 10 sx cement plug f/ 3740' - 3620'
- (4). Displace w/9.0# Gel mud f/3620' - 860'
- (5). Spot 10 sx cement plug f/910' - 800'
- (6). Displace w/9.0# Gel mud f/810' - surface
- (7). Spot 10 sx cement plug f/400' - 300'
- (8). Set 10 sx cement plug f/132' - surface.



18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Production Manager


DATE 11-8-89

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

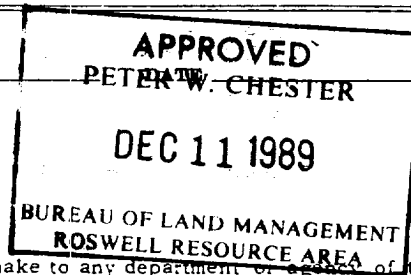

*See Instructions on Reverse Side