

N. M. Oil Cons. Division

811 S. 1ST ST.

ARTESIA, NM 88210-2834

clsr

Form 3160-5 (June 1990)


UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED Budget Bureau No. 1004-0135 Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to different reservoirs Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

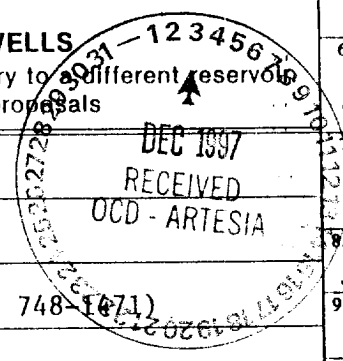


1. Type of Well [X] Gas Well; 2. Name of Operator YATES PETROLEUM CORPORATION; 3. Address and Telephone No. 105 South 4th St., Artesia, NM 88210; 4. Location of Well 660' FSL & 1750' FEL of Section 25-T8S-R26E; 5. Lease Designation and Serial No. NM-93184; 8. Well Name and No. Jasper ARJ Federal #1; 9. API Well No. 30-005-63142; 10. Field and Pool, or Exploratory Area Foot Ranch Precambrian; 11. County or Parish, State Chaves Co., NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION: [X] Subsequent Report; TYPE OF ACTION: [X] Other Perforate & acidize

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

11-14-97 - Cleaned location and set anchors. Moved in and rigged up pulling unit. TIH with notched collar and tagged at 6616'. Pulled up to 6340'. Shut well in. 11-15-97 - TOOH with tubing. Rigged up wireline. TIH with 4" casing guns and perforated 6293-6334' w/12 .42" holes as follows: 6293, 94, 95, 6309, 10, 11, 13, 30, 31, 32, 33 & 6334' (1 SPF - Penn). TOOH with casing guns and rigged down wireline. TIH with packer w/1.875" on/off tool to 6339'. Spot 100 gallons 10% iron control HCL acid. Pulled up to 6245'. Reversed 2 bbls. Nippled down BOP. Set packer. Break perforations. Put away spot acid. Released packer. Nippled up BOP. Set packer and flanged up. Acidized perforations 6293-6334' with 1400 gallons 10% iron control HCL acid and ball sealers. Swabbing. Shut well in. 11-16-17-97 - Opened well and bled down. Flared to pit. Swabbed and flowed. Shut well in. 11-18-97 - Opened well and bled down. Flared to pit. Flowed & swabbed. Shut well in. 11-19-97 - Rigged down and moved out pulling unit. Shut well in. Prep to frac 11-24-97.

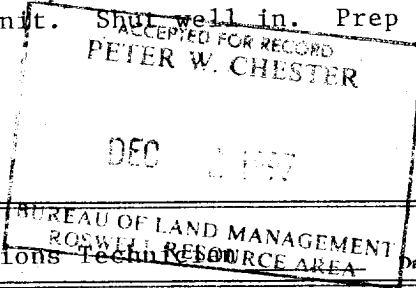

14. I hereby certify that the foregoing is true and correct. Signed: [Signature] Title: Operations Technician Date: Nov. 25, 1997

Approved by: _____ Title: _____ Date: _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.