

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Artesia, NM 88210

Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO.

NM 0306551

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Burk Royalty Co.

3. ADDRESS OF OPERATOR

P. O. Box BRC, Wichita Falls, Texas 76307

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

660' FNL & 971' FWL

RECEIVED

JAN 19 '90

O. C. D.
ARTESIA OFFICE

7. UNIT AGREEMENT NAME

Double "L" Queen Unit

8. FARM OR LEASE NAME

Double "L" Qn. Unit TR 8

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Double "L" Queen Assoc.

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 7, T15S, R30E

12. COUNTY OR PARISH

Chaves

13. STATE

NM

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

GR 3904'

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)


17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Casing: 8 5/8" (24#) Set @416' w with 300sxs.
4 1/2" (9.5#) Set @2039' with 200 sxs.
Perfs: 1990' to 2 000'

Procedure:

Pull tubing & rods. Set 4 1/2" bridge plug @1925'.
Spot 15 sxs cement. Spot 15 sxs @1053'. Perf casing @400'.
Pumped 150 sxs. No circ. Pumped 350 sxs. Circ. to pit.
Work performed 11-21-89 to 11-28, 29, 1989. Will set marker.

Post #0-2
1-26-90
P+H

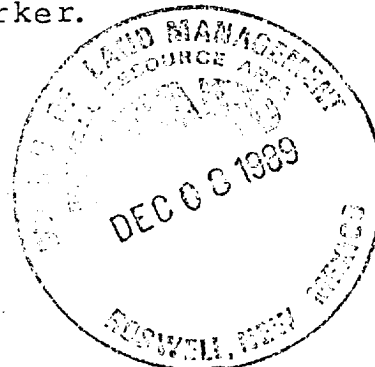

18. I hereby certify that the foregoing is true and correct

SIGNED

Fred M. Lynch
Fred M. Lynch

TITLE Petroleum Engineer

DATE 12-6-89

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

*See Instructions on Reverse Side

APPROVED
DAVID W. CHESTER

JAN 9 1990

BUREAU OF LAND MANAGEMENT
ROSWELL RESOURCE AREA