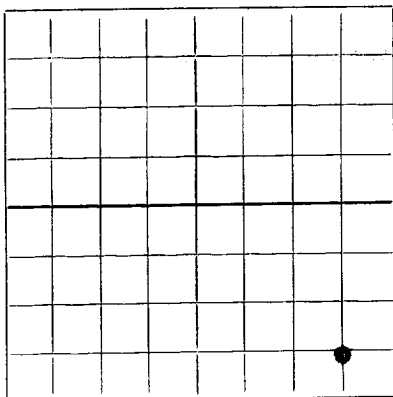


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

~~Consolidated Coppermine Corporation~~
(Company of Operator)~~Shell State~~
(Lease)Well No. 1, in SE $\frac{1}{4}$ of SE $\frac{1}{4}$, of Sec. 20, T. 17 S, R. 28 E, NMPM.~~Empire-Wolfcamp~~ Pool, Eddy County.Well is 660 feet from South line and 660 feet from East line of Section 20. If State Land the Oil and Gas Lease No. is B-8435.Drilling Commenced April 18, 1958 Drilling was Completed June 22, 1958.Name of Drilling Contractor Great Western Drilling CompanyAddress Midland, TexasElevation above sea level at Top of Tubing Head 3601. The information given is to be kept confidential until Aug. 18, 1958.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
<u>8-5/8"</u>	<u>24</u>	<u>N</u>	<u>2100</u>	<u>Float</u>			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>11"</u>	<u>8-5/8"</u>	<u>2113'</u>	<u>1000</u>	<u>Plug</u>	<u>9.2</u>	

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation.....

.....Depth Cleaned Out.....

CORD OF DRILL-STEM AND SPECIAL TI 3

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from Surface feet to 10,440 feet, and from _____ feet to _____ feet.
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing Dry hole, 19____.

OIL WELL: The production during the first 24 hours was _____ barrels of liquid of which _____ % was
was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I.
Gravity _____.

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of
liquid Hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____.

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.			T. Devonian		T. Ojo Alamo
T. Salt			T. Silurian		T. Kirtland-Fruitland
B. Salt			T. Montoya		T. Farmington
T. Yates			T. Simpson		T. Pictured Cliffs
T. 7 Rivers	<u>685'</u>		T. McKee		T. Menefec
T. Queen	<u>1185'</u>		T. Ellenburger		T. Point Lookout
T. Grayburg	<u>1660'</u>		T. Gr. Wash.		T. Mancos
T. San Andres	<u>1925'</u>		T. Granite		T. Dakota
T. Glorieta	<u>3310'</u>		T.		T. Morrison
T. Drinkard			T.		T. Penn.
T. Tubbs	<u>4310'</u>		T.		T.
T. Abo	<u>5480'</u>		T.		T.
T. Penn.	<u>7770'</u>		T.		T.
T. Miss.	<u>10415'</u>		T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	76	76	Surface rock	5681	5737	56	Lime and shale
76	333	257	Red beds & caliche	5737	5891	154	Lime
333	776	443	Red beds	5891	6152	261	Lime and shale
776	1174	398	Red beds & lime	6152	6537	385	Lime
1174	1258	84	Sand, anhy., lime	6537	6623	91	Sandy lime
1258	1512	254	Sand & lime	6623	8186	1558	Lime and shale
1512	1578	66	Anhy.	8186	8631	445	Lime
1578	1832	254	Anhy., lime, sand	8631	9774	1143	Lime and shale
1832	2017	185	Anhy., lime	9774	9804	30	Lime, shale, sand
2017	2414	397	Lime	9804	10440	536	Lime and shale
2414	2559	145	Lime & anhydrite				
2559	2663	104	Lime, anhy., shale				
2663	2775	112	Lime				
2775	3683	908	Sandy lime				
3683	3805	122	Lime				
3805	3866	61	Sandy lime				
3866	4528	662	Lime				
4528	4701	173	Lime and sand				
4701	5023	322	Sandy lime				
5023	5214	191	Lime and sand				
5214	5406	192	Sandy lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator Consolidated Coppermines Corp. Address August 18, 1958 (Date)
Name Operator Position or Title 405 Lexington Ave., New York 17, N.Y.
Operator