

45F

RECEIVED BY

APR 22 1986

UNITED STATES

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. Oil well ☒ Gas well ☐ other ☐
2. NAME OF OPERATOR
Mobil Producing TX. & N.M. Inc. ✓
3. ADDRESS OF OPERATOR Nine Greenway Plaza,
Suite 2700, Houston, Texas 77046
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660' FSL & 1980' FWL, Sec 4, T16S, R30E
AT TOP PROD. INTERVAL: Same as surface
AT TOTAL DEPTH: Same as surface

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
- FRACTURE TREAT ☐
- SHOOT OR ACIDIZE ☐
- REPAIR WELL ☐
- PULL OR ALTER CASING ☐
- MULTIPLE COMPLETE ☐
- CHANGE ZONES ☐
- ABANDON* ☐
- (other) ☐

SUBSEQUENT REPORT OF:

- ☐
- ☐
- ☐
- ☐
- ☐
- ☐
- ☐
- ☒

5. LEASE

LC-060398

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

West Henshaw Premier Unit, Tract 1

8. FARM OR LEASE NAME

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

West Henshaw Grayburg

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 4, T-16S, R-30E

12. COUNTY OR PARISH

Eddy

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3837' DF

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 06/25/84 MIRU Mayo Marrs csg pulling ut, WIH w/bit on tbg to 2800, POH w/bit, WIH w/ 5-1/2" cmt ret to 2785, circ hole w/9.5# mudladen fluid, set ret @ 2785, cmt sqz 25x C cmt below ret into Premier OHZ 2805-2844, pulled stinger out of ret, cap ret w/5x C cmt, TOC @ 2780.
- 06/26/84 Cut 5-1/2" csg @ 1260', could not pull csg, WIH w/pkr & set @ 1000', cmt squeeze cut w/60x C cmt, POH w/pkr, ran sinker bar on WL, tag top of cmt @ 1115', cut 5-1/2 csg @ 620', pulled 19 jts 5-1/2" csg, WIH w/ tbg to 400', spotted 50x C cmt.
- 06/27/84 WIH w/tbg tag TOC @ 289', spotted 35x C cmt 289-189, POH w/tbg, dug out well head.
- 06/28/84 Ran sinker bar on WL tag TOC @ 189, set 30x C cmt plug 60' to surface, cut off wellhead, weld on steel plate, install P&A marker, released Mayo Mars @ 10:30 AM

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

28. I hereby certify that the foregoing is true and correct

SIGNED

Paula W. Collins

TITLE Authorized Agent

DATE

07/12/84

(This space for Federal or State office use)

APPROVED BY

Sgt. Charles S. ...


TITLE

DATE

4-18-86

CONDITIONS OF APPROVAL, IF ANY:

Rec'd 7-2
4-25-86
P & A

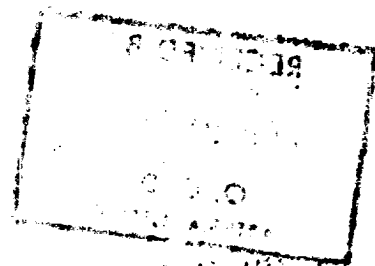

RECEIVED
APR 21 1986
O.C.D.
HOBBS OFFICE