


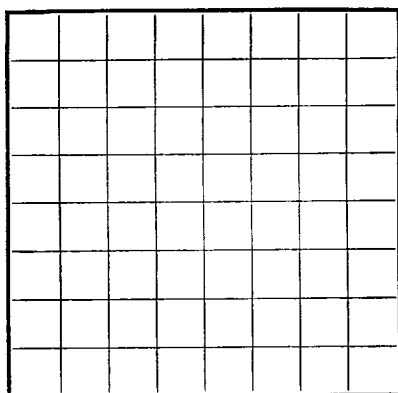

LOCATE WELL CORRECTLY

RECEIVED UNITED STATES
DEPARTMENT OF THE INTERIOR
NOV 22 1961 GEOLOGICAL SURVEY
U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO
LOG OF OIL OR GAS WELL

Company John H. Trigg Address P.O. Box 520 Roswell, New Mexico
 Lessor or Tract Federal "A" Field N. Square Lake Grbg State New Mexico
 Well No. 6-9 Sec. 9 T. 16S R. 31E Meridian N.M.P.M. County Eddy
 Location 1980 ft. XXX of N Line and 1980 ft. XX of E Line of Section 5 Elevation 4125
(Don't forget to attach plat)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date **October 18, 1961**

Title **Geologist**

The summary on this page is for the condition of the well at above date.

Commenced drilling **September 22,** 19**61** Finished drilling **October 1** 19**61**

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

(Denote gas by G)

No. 1, from 3571 to 3608	No. 4, from _____ to _____
No. 2, from _____ to _____	No. 5, from _____ to _____
No. 3, from _____ to _____	No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____

No. 2, from _____ to _____

No. 3, from _____ to _____

No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8	24.4		J-55	837	Float				
4 1/2	10.3		CRP	0424	Flow		321	0408	
HISTORY OF OIL ON CV2 LEFT									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8	850	100	Pump		
4 1/2	3636	200	Pump		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

[illegible]

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
8F	3599	- 3608	40,500 gal. oil and	92,000# sand		
8F	3571		27,300 gal. oil and	37,500# sand		

TOOLS USED

Rotary tools were used from 0 feet to 3641 feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

DATES

October 26, 1961 Put to producing October 25, 1961

The production for the first 24 hours was 144 barrels of fluid of which 190% was oil; -----% emulsion; -----% water; and -----% sediment. Gravity, °Bé. -----

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

D. T. Smith, Driller

W. M. Knight, Driller

B. D. Blackledge, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	850	850	Red beds and caliche
850	950	100	Anhydrite
950	1850	900	Salt-Anhydrite and potash stringers
1850	3250	1400	Red beds - Anhydrite and lime stringers
3250	3610	360	Lime with sand stringers
3610	3641	31	White lime
	T. D. 3641		
Log Tops:	Base Salt	1843	
	Yates	2025	
	Queen P	2855	
	Grayburg	3250	
	Premier	3550	
	San Andres	3614	

